研究彈薪表單填寫教學

(A類-獎勵、N類-新聘、Y類-延攬)

研發處113.3.15修正

本表僅作為輔助分辨可適用之申請類型, 補助與否仍需以視申請人資格及實際績效而定。 延攬特優研究人才 (本校獎勵特殊優秀研究 人才支給要點第5點第4款) 新聘特優研究人才 (本校獎勵新聘特殊優秀 研究人才支給作業規定) 符合《附表一》 第一級~第七級 獎勵特優研究人才 各適用標準? (本校獎勵特殊優秀研究 1. 是 人才支給作業規定第3點 2. 否 第1款、第2款、附表一)

自國內其他大專校院 轉仟本校?

- 1. 是
- 2. 否,國內首聘或 前五年均任職國外學 研機構)

本校仟職年資?

- 1. 新聘任3年內
- 2. 超過3年

獲下列獎項之一: 當年度之講座教授、 終身特聘教授或特聘 教授,前一年度之傑 出研究獎/傑出產學 合作獎?

1. 是,當年度之講 座教授[第六級]、終 身特聘教授[第七級] 特聘教授[第八級], 前一年度之傑出研究 獎/傑出產學合作獎 [第八級]

2. 否

是否到職1年內? 1. 是

2. 否

補助日前一年 內曾主持國科 會各型計畫?

- 1. 是
- 2. 否

近五年內曾主持國科會各型 計畫,並滿足《基本門檻》 之條件?

- 1. 是
- 2. 否

2

N類-新聘

【辦理期程:每年二梯次(2月、6月)】

申請表(首次申請者)

申請表(續撥獎勵者)

1.首次申請者

必備條件:

- ▶ 本校新聘任期三年(含)以下。
- ▶ 執行國科會專題研究計畫之教學研究人員。
- 以國內第一次延攬聘任者為限,不含由國内公私立大專校院或學術研究機關(構)延攬之人員。
- ▶ 需特別留意是否已申請/聘任其他競合性彈性薪資(例:資安彈薪)。

2.續撥申請者

必備條件:

- ▶ 第一年至少發表一篇收錄於 Scopus 或 WOS 資料庫之國際學術期刊論 文或國際研討會論文。
- ▶ 第二年及第三年至少需各發表收錄一篇和二篇於 Scopus 或 WOS 資料庫之國際學術期刊論文(不含國際研討會論文)。
- ▶ 獎勵期限每人至多三年,且不得中斷聘期,並須每年提出申請,經審查 通過後,由本校依當年度可使用經費總額核予獎勵金,按月撥付。

Y類-延攬

【辦理期程:每年一次(6月底申請)】

申請表

注意事項:

- ▶ 可採計教師於前一任職單位近五年傑出績效表現。
- ▶ 近五(學)年曾執行政府計畫三個(學)年度以上。
- ▶ 申請時務必留意須將預期績效分年度並具體列出以供審查與考核。
- ▶ 延攬(Y)與新聘(N)申請條件不相同,不可同時申請。
- ▶ 延攬(Y)需與獎勵(A)之第八、九級申請人一同進行排序(例:Y類申請人等同A類第X名申請者)

A類-獎勵

【辦理期程:每年二梯次(6月底申請)】

申請表

注意事項:

- ▶ 採計近五年傑出績效表現。
- ▶ 以本校名義發表論文、執行國科會計畫、產學合作計畫、技術移轉等項目綜合考 評機制。
- 共分為九個等級,依等級核發獎勵金,可勾多個級別,擇優辦理。
- ▶ 第5~7級的申請名單不需經學院排名。
- 第8、9級的申請需先經學院排名後提供排序名單,再由學校依各學院貢獻度依比例排名。

獎項方面

- 需提供佐證資料
- 前一年度且累積二次以上 EX: 113年度申請·110年度獲獎+108年度 曾獲獎即有符合

	申請項目(請勾選並檢附-表 A「近五年內之傑出績效說明表」) ※本次補助起始日:113.8.1
第一級	申請級數:第級 第項
至	適用標準:
第四級	※ 請依「附表一:本校獎勵特殊優秀研究人才支給標準表」之等級適用標準自行填寫
	□ 1.國際知名之國家院士
	□ 2.曾(現)任國際著名大學之講座
第五級	□ 3.前一年度以本校名義獲國科會傑出研究獎且累積獲獎次數達二次以上
	□ 4.當學年度獲聘為本校終身講座教授者
	□ 5. 用一牛度以本权名我發衣之論又點數達250點以上(个含研討實論又)
A 10	□ 1.前一年度以本校名義獲國科會傑出研究獎
第六級	□ 2.當學年度獲聘為本校專任講座教授者□ 3.前一年度以本校名義發表之論文點數達140點以上(不含研討會論文)
	□ 1.當學年度獲聘為本校終身特聘教授者□ 2.前一年度獲本校傑出研究獎或傑出產學合作獎且累積次數達二次以上者
	□ 2.前一千及後本校保山町九央以保山産学合作央丘系模人敷建一人以上有□ 3.前一年度以本校名義發表之論文點數達80點以上(不含研討會論文)
第七級	□ 4.前一年度以本校名義所獲得之產學合作計畫點數達240點以上且管理費納入校務基金超過150萬元
	□ 5.前一年度以本校名義所獲得之實收技術移轉金點數達175點以上且管理費納入校務基金超過50萬元
	※ 以本級第4、5項申請者,「傑出績效說明表」請先至產學處確認核章後,再送回各系所審查。
	□ 1.當學年度獲聘為本校特聘教授者
焙 、 /a	□ 2.前一年度獲本校傑出研究獎者
第八級	□ 3.前一年度獲本校傑出產學合作獎者
及	□ 4.基本門檻:近五年內曾主持國科會各型計畫,並滿足下列條件之一者
第九級	□ (1)近五年以本校名義發表之重要學術論著績效點數12點。 設計學院及人社學院教師得採計 TSSCI/THCI 期刊論文;人文、設計、藝術或社會科學領域
	故前字院及入任字院教師符体計 ISSCI/InCI 期刊編义,人文、設計、藝術或任實科字領域 教師得以學術專書著作或專章申請。
-l- >4 64	□ (2)以本校名義主持國科會各類型計畫,五年內之總金額,以五年內之計畫總金額為通過標準,
申請第4項(1)(2)院推薦	其標準由各學院依相關程序訂定之。
排序	□ (3)近五年以本校名義所獲得之產學合作計畫累計總金額超過1000萬元(績效點數200點)且管理
*/1-4	費納入校務基金超過150萬元者。
	□ (4)近五年以本校名義所獲之實收技術移轉金累計總金額超過250萬元(績效點數125點)且管理費
	納入校務基金超過50萬元者。
(由學院填寫)	※ 以本級第4項(3)、(4)申請者,「傑出績效說明表」請先至產學處確認核章後,再送回各系所審查。

論文方面

以前一年度(曆制年)發表論文點數為申請 門檻者,需至近五年內傑出績效表填寫 (同理適用產學、技轉等同項的格子)

國立臺北科技大學獎勵特殊優秀研究人才近五年內之傑出績文說明表

A

學術論著					小計				
		108	109	110	111	112	(A)		
	篇數								
Scopus 或 WOS 資料庫	點數 (請參照表 B)								
XIII	説明:採計 S	說明:採計 Scopus 論文者,請檢附-表 B「傑出論文績效說明表							
TSSCI/THCI (限設計及	篇數								
人社學院)	點數 (2點/篇)								
人文、設計、藝術或	册數								
社會之學術專書	點數 (6點/冊)								
人文、設計、藝術或 社會之學術專書單篇 (章)	篇數								
	點數 (2點/篇)								

	has been a factor of the facto
	申請項目(請勾選並檢附-表 A「近五年內之傑出績效說明表」) ※本次補助起始日:113.8.1
第一級	申請級數:第
至	適用標準:
第四級	※ 請依「附表一:本校獎勵特殊優秀研究人才支給標準表」之等級適用標準自行填寫
	□ 1.國際知名之國家院士
	□ 2.曾 (現)任國際著名大學之講座
第五級	□ 3.前一年度以本校名義獲國科會傑出研究獎且累積獲獎次數達二次以上
	□ 4.當學年度獲聘為本校終身講座教授者
	□ 5.前一年度以本校名義發表之論文點數達250點以上(不含研討會論文)
	□ 1.前一年度以本校名義獲國科會傑出研究獎
第六級	□ 2.當學年度獲聘為本校專任講座教授者
	□ 3.前一年度以本校名義發表之論文點數達140點以上(不含研討會論文)
	□ 1.當學年度獲聘為本校終身特聘教授者
	□ 2.前一年度獲本校傑出研究獎或傑出產學合作獎且累積次數達二次以上者
第七級	□ 3.前一年度以本校名義發表之論文點數達80點以上(不含研討會論文)
和 し 級	□ 4.前一年度以本校名義所獲得之產學合作計畫點數達240點以上且管理費納入校務基金超過150萬元
	□ 5.前一年度以本校名義所獲得之實收技術移轉金點數達175點以上且管理費納入校務基金超過50萬元
	※ 以本級第4、5項申請者,「傑出績效說明表」請先至產學處確認核章後,再送回各系所審查。
	□ 1.當學年度獲聘為本校特聘教授者
At 1 40	□ 2.前一年度獲本校傑出研究獎者
第八級	□ 3.前一年度獲本校傑出產學合作獎者
及	□ 4.基本門檻:近五年內曾主持國科會各型計畫,並滿足下列條件之一者
第九級	□ (1)近五年以本校名義發表之重要學術論著績效點數12點。
71.70.50	設計學院及人社學院教師得採計 TSSCI/THCI 期刊論文;人文、設計、藝術或社會科學領域
	教師得以學術專書著作或專章申請。
申請第4項	□ (2)以本校名義主持國科會各類型計畫,五年內之總金額,以五年內之計畫總金額為通過標準,
(1)(2)院推薦	其標準由各學院依相關程序訂定之。
排序	□ (3)近五年以本校名義所獲得之產學合作計畫累計總金額超過1000萬元(績效點數200點)且管理
	費納入校務基金超過150萬元者。 □ (小) 五五年以上校夕美的確立 樂水 比 依 故 赫 △ 男 弘 倫 △ 领 却 思 250 故 云 (條 故 即 數 125 即) 日 為 理 彰
	□ (4)近五年以本校名義所獲之實收技術移轉金累計總金額超過250萬元(績效點數125點)且管理費納入校務基金超過50萬元者。
المقد طبيعة المار	
(由學院填寫)	※ 以本級第4項(3)、(4)申請者,「傑出績效說明表」請先至產學處確認核章後,再送回各系所審查。

產學與技轉方面

以產學合作計畫或技術移轉金申請者,請先由產學處確認 填報數據正確(以產學合作計畫為例)

第七級-4. 以前一年度申請者:

產學合作言		小計					
(不包含以學校名義開授訓練	108	109	110	111	112	71.01	
近五年以本校名義所	件數						
	管理費 (萬元)						
	計畫金額 (萬元)						
獲得之產學合作計畫,其實際納入本校	點數 (2點/10萬元)						
校務基金之統計表	產學處	承辨人					
	(簽章)	※以第七級貧	及管理費總金額後核章				

第八、九級-4(3). 近五年內(加總)以本校名義申請者:

技術移轉金			小計							
(不包含國科會先期技術移轉授權金)		108	109	110	111	112	1.91			
近五年以本校名義所	件數									
	管理費 (萬元)									
	技轉金額 (萬元)									
獲之實收技術移轉金 統計表	點數 (5點/10萬元)									
		承辦人			單位主令	ş.				
	產學處									
	(簽章)	※以第七級分	處填寫確認技輔	金及管理費金						
							額後核章			

	申請項目(請勾選並檢附-表 A「近五年內之傑出績效說明表」) ※本次補助起始日:113.8.1
第一級	申請級數:第
至	適用標準:
第四級	※ 請依「附表一:本校獎勵特殊優秀研究人才支給標準表」之等級適用標準自行填寫
	□ 1.國際知名之國家院士
	□ 2.曾 (現)任國際著名大學之講座
第五級	□ 3.前一年度以本校名義獲國科會傑出研究獎且累積獲獎次數達二次以上
	□ 4.當學年度獲聘為本校終身講座教授者
	□ 5.前一年度以本校名義發表之論文點數達250點以上(不含研討會論文)
	□ 1.前一年度以本校名義獲國科會傑出研究獎
第六級	□ 2.當學年度獲聘為本校專任講座教授者
	□ 3.前一年度以本校名義發表之論文點數達140點以上(不含研討會論文)
	□ 1.當學年度獲聘為本校終身特聘教授者
	□ 2.前一年度獲本校傑出研究獎或傑出產學合作獎且累積次數達二次以上者
第七級	□ 3.前一年度以本校名義發表之論文點數達80點以上(不含研討會論文)
*	 □ 4.前一年度以本校名義所獲得之產學合作計畫點數達240點以上且管理費納入校務基金超過150萬元 □ 5.前一年度以本校名義所獲得之實收技術移轉金點數達175點以上且管理費納入校務基金超過50萬元
	※ 以本級第4、5項申請者,「傑出績效說明表」請先至產學處確認核章後,再送回各系所審查。
	□ 1.當學年度獲聘為本校特聘教授者
第八級	□ 2.前一年度獲本校傑出研究獎者
及	□ 3.前一年度獲本校傑出產學合作獎者□ 4.基本門檻:近五年內曾主持國科會各型計畫,並滿足下列條件之一者
	□ (1)近五年以本校名義發表之重要學術論著績效點數12點。
第九級	設計學院及人社學院教師得採計 TSSCI/THCI 期刊論文;人文、設計、藝術或社會科學領域
	教師得以學術專書著作或專章申請。
申請第4項	□ (2)以本校名義主持國科會各類型計畫,五年內之總金額,以五年內之計畫總金額為通過標準,
1)(2)院推薦	其標準由各學院依相關程序訂定之。
排序	□ (3)近五年以本校名義所獲得之產學合作計畫累計總金額超過1000萬元(績效點數200點)且管理
	費納入校務基金超過150萬元者。 □ (1)近天在以本校夕義的確決變於比較较輔入里計确入節却以250萬元(綠林斯數125點)日際理整
	□ (4)近五年以本校名義所獲之實收技術移轉金累計總金額超過250萬元(績效點數125點)且管理費納入校務基金超過50萬元者。
由學院填寫)	新八校析否並超過50两九名。 ※ 以本級第4項(3)、(4)申請者,「傑出績效說明表」請先至產學處確認核章後,再送回各系所審查。
田宇応張尚)	△ 今今祝却TX(V) 「(T)T 明有 : 所以與从奶切水」明九主及于幾個的核平後,行也回台京川普直。

國科會計畫方面

- 需提供佐證資料(教師評鑑系統列印畫面)● 通過標準由各學院訂定


國科會計		小計					
(不包含國科會產學合作計畫)		108	109	110	111	112	1, 81
近五年以本校名義主 持國科會各類型計畫 統計表	件數						
	計畫金額 (萬元)						
(請系所與學院依教評 系統資料確認)	點數 (5點/10萬元)						

	申請項目(請勾選並檢附-表 A「近五年內之傑出績效說明表」) ※本次補助起始日:113.8.1
第一級至	申請級數:第級 第項 適用標準:
王 第四級	20 / 徐平·
第五級	□ 1.國際知名之國家院士 □ 2.曾(現)任國際著名大學之講座 □ 3.前一年度以本校名義獲國科會傑出研究獎且累積獲獎次數達二次以上 □ 4.當學年度獲聘為本校終身講座教授者 □ 5.前一年度以本校名義發表之論文點數達250點以上(不含研討會論文)
第六級	 □ 1.前一年度以本校名義獲國科會傑出研究獎 □ 2.當學年度獲聘為本校專任講座教授者 □ 3.前一年度以本校名義發表之論文點數達140點以上(不含研討會論文)
第七級	□ 1.當學年度獲聘為本校終身特聘教授者 □ 2.前一年度獲本校傑出研究獎或傑出產學合作獎且累積次數達二次以上者 □ 3.前一年度以本校名義發表之論文點數達80點以上(不含研討會論文) □ 4.前一年度以本校名義所獲得之產學合作計畫點數達240點以上且管理費納入校務基金超過150萬元 □ 5.前一年度以本校名義所獲得之實收技術移轉金點數達175點以上且管理費納入校務基金超過50萬元 ※ 以本級第4、5項申請者,「傑出績效說明表」請先至產學處確認核章後,再送回各系所審查。
第八級 第九級	□ 1.當學年度獲聘為本校特聘教授者 □ 2.前一年度獲本校傑出研究獎者 □ 3.前一年度獲本校傑出產學合作獎者 □ 4.基本門檻:近五年內曾主持國科會各型計畫,並滿足下列條件之一者 □ (1)近五年以本校名義發表之重要學術論著績效點數12點。 設計學院及人社學院教師得採計 TSSCI/THCI 期刊論文;人文、設計、藝術或社會科學領域
申請第4項 (1)(2)院推薦 排序	教師得以學術專書著作或專章申請。 (2)以本校名義主持國科會各類型計畫,五年內之總金額,以五年內之計畫總金額為通過標準, 其標準由各學院依相關程序訂定之。 (3)近五年以本校名義所獲得之產學合作計畫累計總金額超過1000萬元(績效點數200點)且管理 費納入校務基金超過150萬元者。 (4)近五年以本校名義所獲之實收技術移轉金累計總金額超過250萬元(績效點數125點)且管理費 納入校務基金超過50萬元者。
(由學院填寫)	※ 以本級第4項(3)、(4)申請者,「傑出績效說明表」請先至產學處確認核章後,再送回各系所審查。

國立臺北科技大學獎勵特殊優秀研究人才近五年內之傑出績效說明表

the she she	e.t.			年度			小計	
學術論著		108	109	110	111	112	(A)	
	篇數							填寫以當年度往前推5年的資料並加總推薦以scopus的查詢為主
Scopus 或 WOS	點數 (請參照表 B)							須提供scopus頁面+論文封面佐證
資料庫	說明:採計 S	copus 論文者	,請檢附-表	B「傑出論文	(績效說明表	٦		
TSSCI/THCI (限設計及	篇數							
人社學院)	點數 (2點/篇)							
人文、設計、藝術或	册數						_	
社會之學術專書	點數 (6點/冊)							● 專書與單篇須為 初版 ,再版、二三 刷皆不可再計入
人文、設計、藝術或 社會之學術專書單篇 (章)	篇數							● 專書單篇以篇數計·N篇得N*2點
	點數 (2點/篇)							14

*以112年申請資料為例

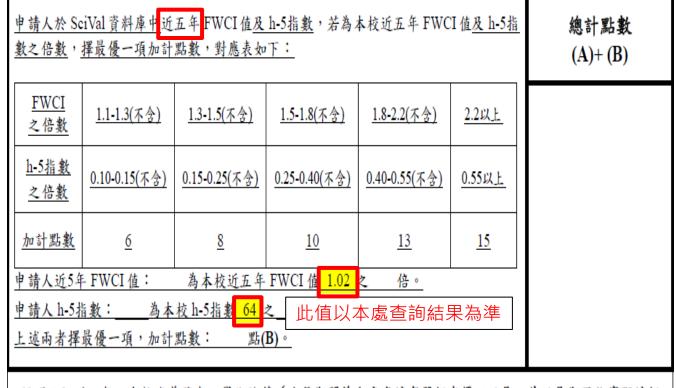

- 說明:1.近五年以本校名義發表之學術論著(此段期間曾生產或請育嬰假者得以延長,其延長期限依實際請假時間為依據,並檢附相關證明文件)始得採計。
 - 2. 論文之期刊排名以出版年度為準,若無該出版年資料,則以前一年度為準。
 - 3. 每篇論文僅能單一作者提出申請,若有2位或以上本校教師為共同作者,請檢附其他教師同意書。



以陳生明教授為例:

申請人近五年FWCI值: 1.6為本校近五年FWCI值 1.02 之 1.56倍 (10點)


申請人h-5指數: 41 為本校h-5指數 64 之 0.64倍 (15點)

上述兩者擇最優一項,加計點數: 15點

*操作方式詳後

查詢方式:

登入Scopus資料庫,輸入老師名字後,點選【匯出至SciVal】,即跑出資料頁面

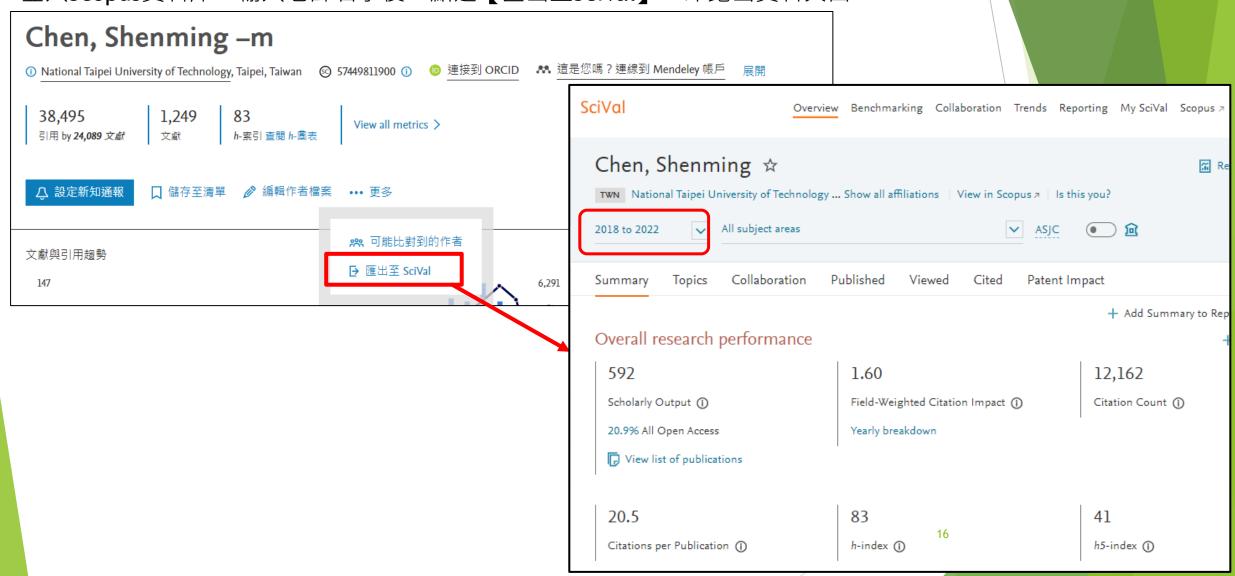

2018


50

更改查詢區間方式:


Entity 1

national Taipei University of Technology

Step1:點選右上角【Benchmarking】頁籤後,點選【Table】

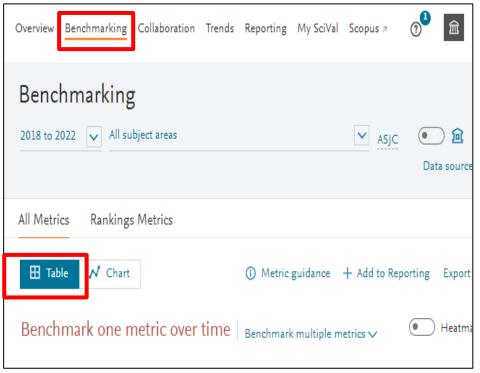

Step2:點選箭頭後,即跳出視窗,輸入近五年之年度後,點選【Apply】

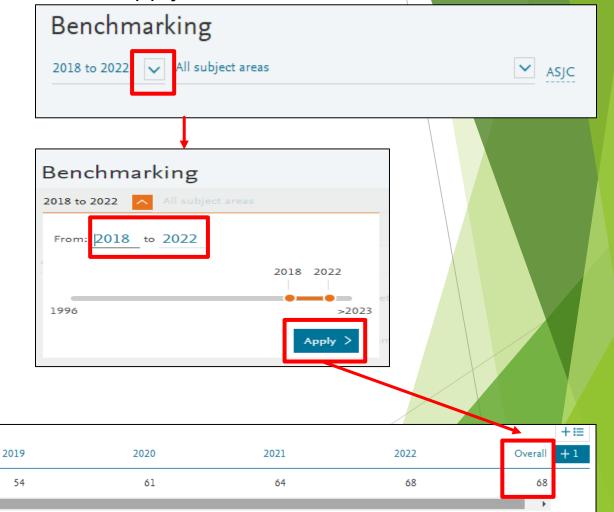

國立臺北科技大學傑出論文績效說明表

В

申請人姓名(中/英文):

系所/職稱:

員工編號:

以莊賀喬教授之論文為例: (接續下頁)

> 每篇論文僅能有一位作者提出申請, 若有2位以上本校教師為共同作者,請 檢附其他教師同意書

Journal Papers 請依序填寫:姓名、著作名稱、 期刊名稱、卷數、頁數、發表年 國際合著學術 點數 作者排序 期刊排名R 共同作者數 額外加權 份(SCI/SSCI,Impact Factor;Scopus 機構國家數 (=W1×W2 CiteScore Rank,領域別)並以米註 (W1) (W2) (W3) (W4) ×W3×W4×W5) (W5)記該篇所有之通訊作者,檢附每 篇論文首頁與以 Scopus 資料庫為 主之證明文件 □Nature、Science 及 □第一作者(x1) □無(x1) ■無 (x1) ■無 (x1) AAA, BBB*, CCC, $25 \times 1 \times 1 \times 1 \times 1$ □1-2個國家 (x1.1) ■通訊作者(x1) ■1位通訊作者 □企業 (x1.1) Cell (150點) An entry-exit path □3個國家以上 (x1.2) =25 □第二作者(x0.8) □SDG (x1.1) □ R≤1% (40點) planner for an □第三作者(x0.6) □2位(含)以上通 □SSCI (x1.5) ■1%<R≤5% (25點) autonomous tractor □第四作者(x0.4) 訊作者(x0.8) □企業、SDG (x1.2) □ 5%< R≤10% (15)
</p> □第五作者以上 □右多位作者 □企業、SSCI (x1.6) in a paddy field, (x0.2)Equal □SDG \ SSCI (x1.6) Computers and □ 10%< R≤25% (10</p> Contribution □企業、SDG、SSCI Electronics in (x0.8)(x1.8)Agriculture, Vol.191. □ 25< R≤40% (5點) Dec, 2021. (SCI, □ R >40% (2點) IF=6.757: CiteScore Rank: 1/94=0.0106=1.06%. Horticulture) □第一作者(x1) □無(x1) □無(x1) □無 (x1) □Nature、Science 及 □1位通訊作者 □1-2個國家 (x1.1) Cell (150點) □通訊作者(x1) □企業 (x1.1) □第二作者(x0.8) (x1)□SDG (x1.1) □3個國家以上 (x1.2) □ R≤1% (40點) □第三作者(x0.6) □2位(含)以上通 □SSCI (x1.5) □1%<R≤5% (25點) □第四作者(x0.4) □企業、SDG (x1.2) 訊作者(x0.8) 15 * 1 * □ 5%< R≤10% (15)
</p> □第五作者以上 □企業、SSCI (x1.6) □右多位作者 □SDG · SSCI (x1.6) (x0.2)Equal

Shobana Sebastin Mary Manickaraj, Sabarison Pandiyarajan, Ai-Ho Liao, Atchaya Ramachandran, Sheng-Tung Huang, Privadharshini Natarajan, Ho-Chiao Chuang*, "Sansevieria trifasciata biomass-derived activated carbon by supercritical-CO₂ route: electrochemical detection towards carcinogenic organic pollutant and energy storage application" Electrochimica Acta, Vol. 424, pp 140672, August 2022. (SCI, Impact Factor=7.3; CiteScore Rank: 19/280=6.78%, General Chemical Engineering)

□ 10%< R≤25% (10 □企業、SDG、SSCI Contribution (x1.8)(x0.8)□ 25< R≤40% (5點)
</p>

□R>40%(2點)

1*1.1*1.1=18.15

續下頁

查詢方式: (以莊賀喬教授之論文為例)


Step1:登入Scopus資料庫

(https://www.scopus.com/search/form.uri?display=authorLookup#basic


),輸入老師名字後,點選【搜尋】




Step2:確認所屬機構為本校後,點選【老師名字】

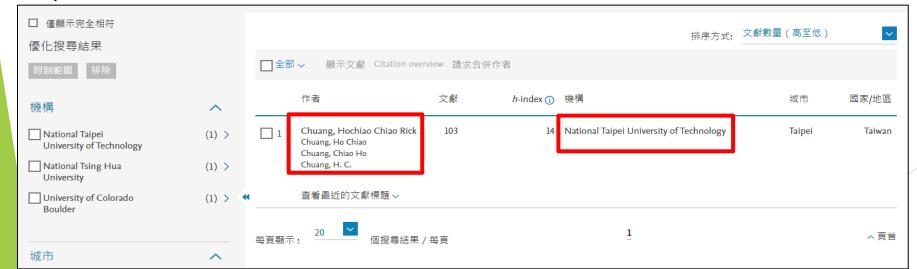


Step3:點入之後滑至最下方,將顯示調至【 200結果】

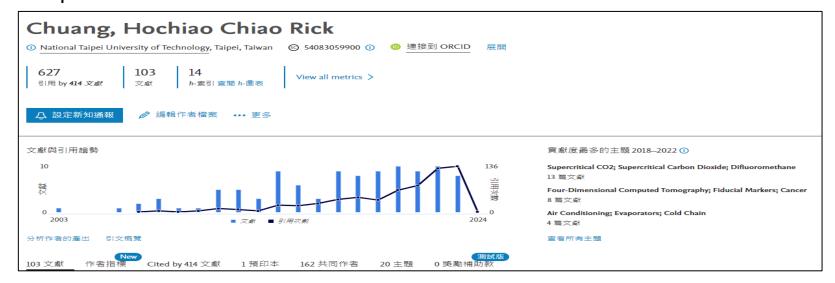

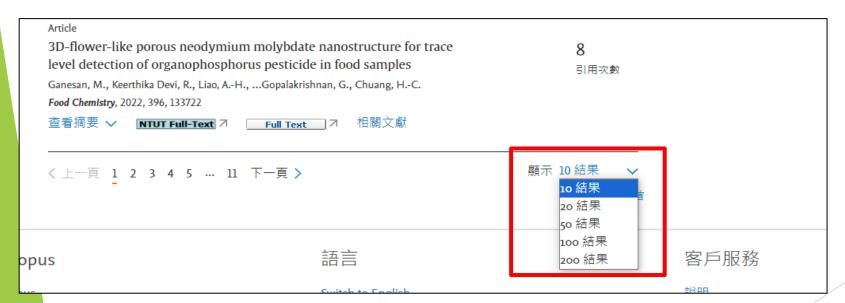

20

Step4:利用CTRL+F去快速搜尋本篇論文

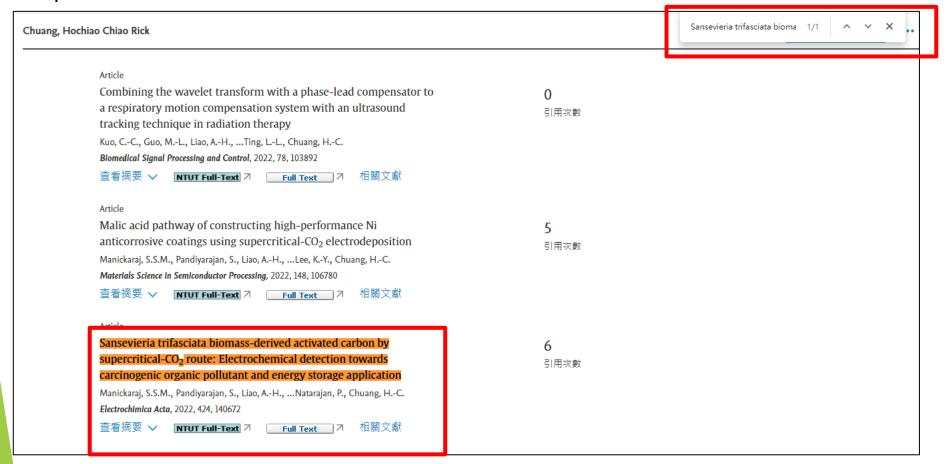

Step5:點選反橘色之論文題目,即帶入論文資料畫面,要確認論文發布時間在本次申請之規定時間內

Electrochimica Acta · 卷 424 20 August 2022 - 論文號碼 140672 Sansevieria trifasciata biomass-derived activated 文獻類型 carbon by supercritical-CO₂ route: 來源出版物種類 Electrochemical detection towards carcinogenic ISSN: 00134686 organic pollutant and energy storage application Manickaraj, Shobana Sebastin Mary^{a, b}; Pandiyarajan, Sabarison^{a, b}; 10.1016/j.electacta.2022.140672 Liao, Ai-Hoc, d; Ramachandran, Atchayae; Huang, Sheng-Tunga; 展開 🗸 Natarajan, Priyadharshini^f; Chuang, Ho-Chiao^b 🖪 將全部儲存到作者清單 ^a Department of Chemical Engineering and Biotechnology, National Taipei University of Technology, Taipei, 106344, Taiwan b Department of Mechanical Engineering, National Taipei University of Technology, Taipei, 106344, Taiwan Graduate Institute of Biomedical Engineering, National Taiwan University of Science and Technology, Taipei, 106335, Taiwan d Department of Biomedical Engineering, National Defense Medical Center, Taipei, 114201, Taiwan 顯示其他的機構 ~ 6 78th percentile 在 Scopus 中的引用次數: in 6 查閱 PDF 全文選項 ✔ 匯出 ✔ 摘要 ▮摘要 Activated carbon (AC) has been widely used for electrochemical applications, such as electrochemical sensors, energy storage applications, etc., due to its fine porous structure, Reaxys 化學資料庫資訊 volumetric capacitance, and chemical stability. Supercritical-CO₂ (SC-CO₂) has a fascinating advantage in material science due to its microbubble cavitation, high diffusivity, and bi

22

查詢W1~W5之方式

國立臺北科技大學傑出論文績效說明表

B

申請人姓名(中/英文):

系所/職稱:

員工編號:

Journal Papers 請依序填寫:姓名、著作名稱、 期刊名稱、卷數、頁數、發表年 份(SCI/SSCI,Impact Factor;Scopus CiteScore Rank,領域別)並以*註 記該篇所有之通訊作者,檢附每 篇論文首頁與以 Scopus 資料庫為 主之證明文件。	期刊排名 R (W1)	作者排序 (W2)	共同作者數 (W3)	額外加權 (W4)	國際合著學術 機構國家數 (W5)	點 數 (=W1×W2 ×W3×W4×W5)
	□Nature、Science 及 Cell (150點) □ R≤1% (40點) □ 1% <r≤5% (10="" (15="" (25點)="" (5點)="" 10%<="" 25<="" 5%<="" r="" r≤10%="" r≤25%="" r≤40%="" □="" 點)="">40% (2點)</r≤5%>	□第一作者(X1) □通訊作者(X1) □第二作者(X0.8) □第三作者(X0.6) □第四作者(X0.4) □第五作者以上 (X0.2)	□無(x1) □1位通訊作者 (x1) □2位(含)以上通 訊作者(x0.8) □有多位作者 Equal Contribution (x0.8)	□無(x1) □企業 (x1.1) □SDG (x1.1) □SSCI (x1.5) □企業、SDG (x1.2) □企業、SSCI (x1.6) □SDG、SSCI (x1.6) □企業、SDG、SSCI (x1.8)	□無 (x1) □1-2個國家 (x1.1) □3個國家以上 (x1.2)	續下頁

查詢W1方式-以Scopus查詢

Step1:點選期刊名稱後,視窗右邊即顯示出來源出版物詳情預覽欄位,點選【瀏覽完整的來源出版物詳情】

Electrochimica Acta 。 卷 424 20 August 2022 論文號碼 140672 Sansevieria trifasciata biomass-derived activated carbon by supercritical-CO₂ route: Electrochemical detection towards carcinogenic organic pollutant and energy storage application Manickaraj, Shobana Sebastin Mary^{a, b}; Pandiyarajan, Sabarison^{a, b}; Liao, Ai-Ho^{c, d}; Ramachandran, Atchaya^e; Huang, Sheng-Tung^a; Natarajan, Priyadharshini^f; Chuang, Ho-Chiao^b 區 將全部儲存到作者清單 ^a Department of Chemical Engineering and Biotechnology, National Taipei University of Technology, Taipei, 106344, Taiwan ^b Department of Mechanical Engineering, National Taipei University of Technology, Taipei, 106344, Taiwan Graduate Institute of Biomedical Engineering, National Taiwan University of Science and Technology, Taipei, 106335, Taiwan Department of Biomedical Engineering, National Defense Medical Center, Taipei, 114201, Taiwan 顯示其他的機構 > 6 78th percentile 在 Scopus 中的引用次數: in Scopus □ 查閱 PDF 全文選項 ✔ 匯出 ✔



查詢W1方式-以Scopus查詢

Step2:選擇論文發表時的年份(如2022年發表,則應選擇2022年之CiteScore)



查詢W1方式-以Scopus查詢

Step3:取百分位數最高之排名後,將期刊排名轉換成對應點數,19/272=6.9%,

對應法規點數為15,並請檢附查詢畫面當作佐證資料




期刊排名 R (W1)

- □Nature、Science及 Cell (150點)
- □ R≤1% (40點)
- □1%<R≦5% (25點)
- □ 5%< R≦10% (15 點)
- □ 10%< R≦25% (10 點)
- □ 25< R ≤ 40% (5點)
- □ R >40% (2點)


查詢W1方式-以WOS查詢


Step1:輸入論文題目後,點選【Search】,即帶入論文資料畫面

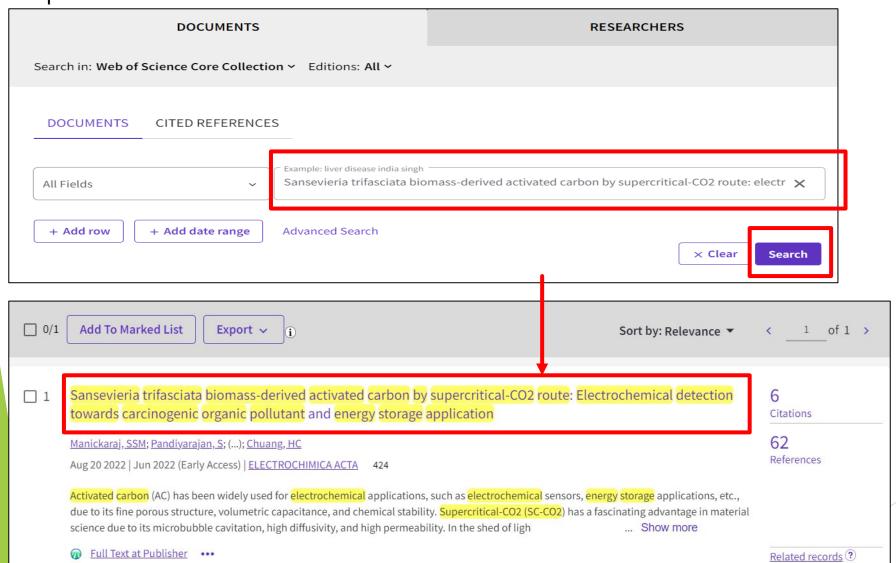


查詢W1方式-以WOS查詢

Step2:點選期刊名稱後,視窗右邊即顯示出Journal information欄位,點選【 Learn more 】

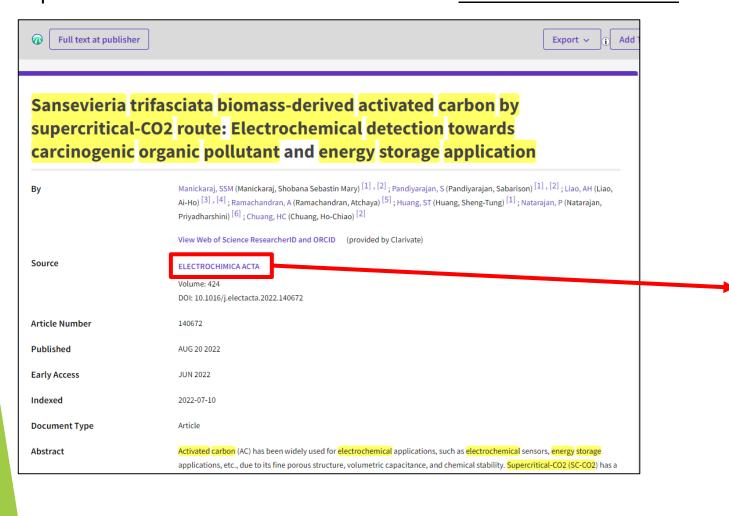


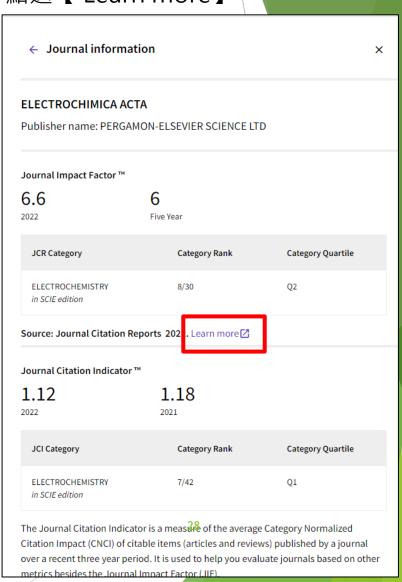

查詢**W1**方式-以WOS查詢 Step3:選擇論文發表時的年份(如2022年發表, 則應選擇2022年之JCR YEAR)

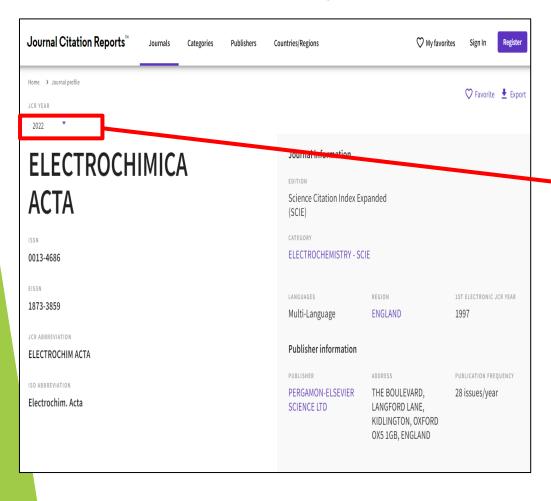

Step4:滑至中間查詢排名,取百分位數最高之排名後,將期刊排名轉換成對應點數,7/42=16.6%,對應法規點數為10,並請檢附查詢書面當作佐證資料

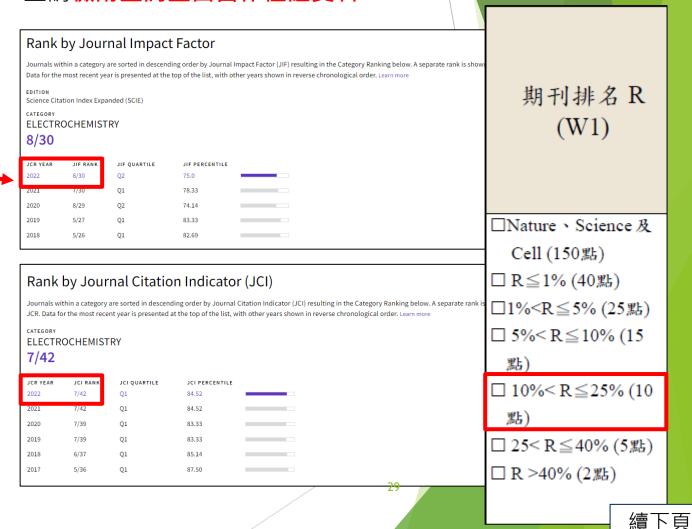


查詢W1方式


注意事項:

- 1. 查詢年度應選擇**論文發表時的年份**(如2022年發表,則應選擇2022年),倘2023年發表, 因有時間差之問題,故可先提供2022年之排名為佐證。
- 2. 可自行選擇以Scopus或Wos之查詢結果為佐證資料。
- 3. 在不四捨五入的情況下依據其所屬區間對應權重數值。

查詢W2方式-以Scopus查詢


依ppt第20頁方式查詢出以下畫面,點選【查閱PDF】,再點選【View PDF】即下載論文檔案

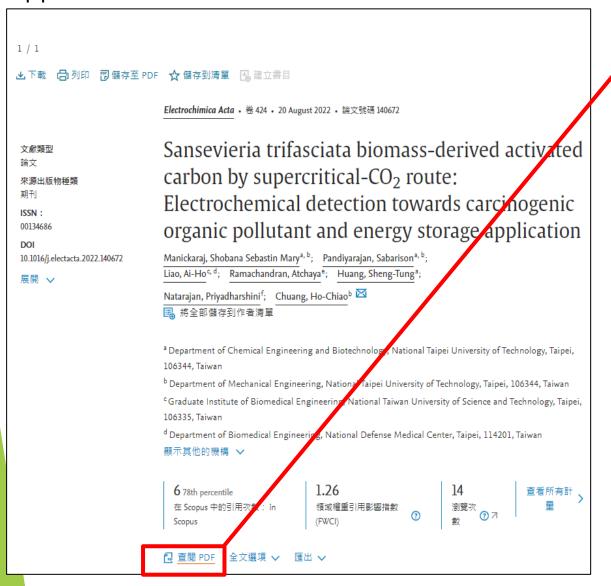

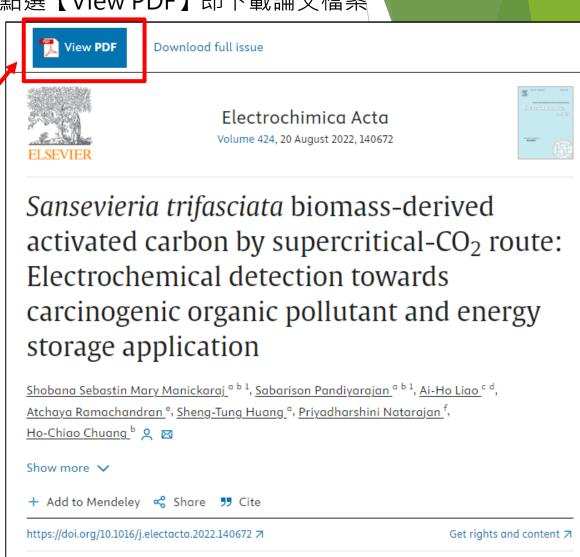

查詢W2方式-以WOS查詢

依ppt第27頁方式查詢出以下畫面,點選【Full text at publisher】,再點選【View PDF】即下載論文檔案

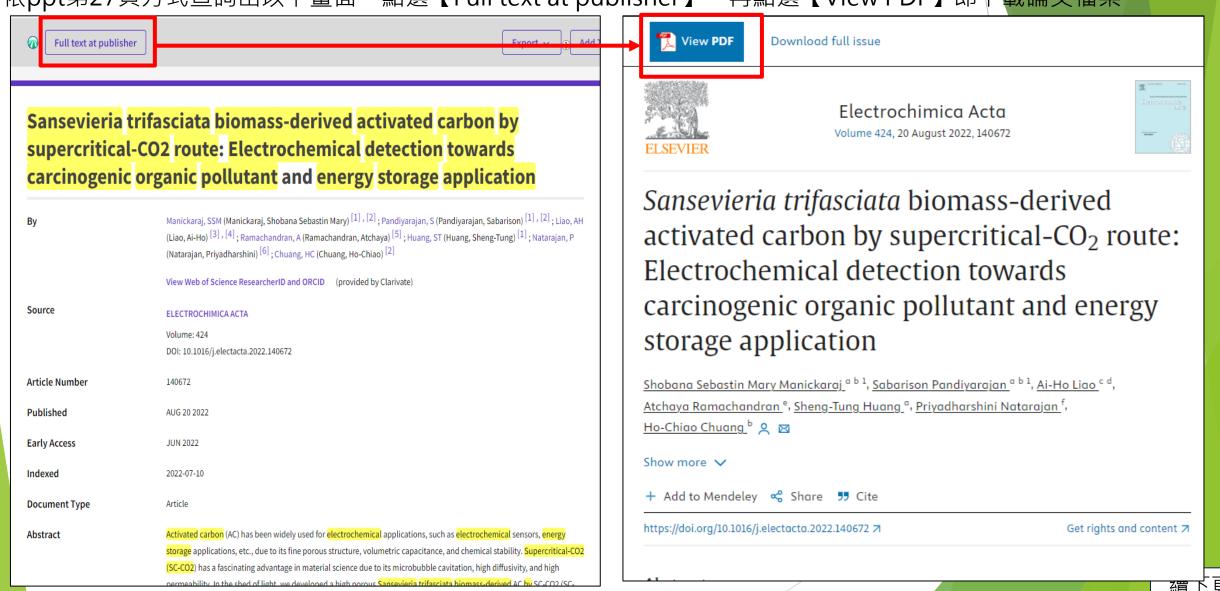

以陳彥霖教授之論文為例:

本篇文章陳教授為**第一作者**,對應法規應**x1**





Article

An Upper Extremity Rehabilitation System Using Efficient Vision-Based Action Identification Techniques

Yen-Lin Chen 10, Chin-Hsuan Liu 10, Chao-Wei Yu 1, Posen Lee 2,* and Yao-Wen Kuo 1

- Department Computer Science and Information Engineering, National Taipei University of Technology, Taipei 10608, Taiwan; ylchen@csie.ntut.edu.tw (Y.-L.C.); chinhsuanliu@gmail.com (C.-H.L.); david741002@gmail.com (C.-W.Y.); kent21221@gmail.com (Y.-W.K.)
- Department Occupational Therapy, I-Shou University, Kaohsiung 82445, Taiwan
- * Correspondence: posenlee@isu.edu.tw; Tel.: +886-7-657-7711 (ext. 7516)

Received: 30 May 2018; Accepted: 10 July 2018; Published: 17 July 2018



Featured Application: This study proposes an upper extremity rehabilitation system using efficient action identification system for home based on color and depth sensor information, and can perform well under complex ambient environments.


Abstract: This study proposes an action identification system for home upper extremity rehabilitation. In the proposed system, we apply an RGB-depth (color-depth) sensor to capture the image sequences of the patient's upper extremity actions to identify its movements. We apply a skin color detection technique to assist with extremity identification and to build up the upper extremity skeleton points. We use the dynamic time warping algorithm to determine the rehabilitation actions. The system presented herein builds up upper extremity skeleton points rapidly. Through the upper extremity of the human skeleton and human skin color information, the upper extremity skeleton points are effectively established by the proposed system, and the rehabilitation actions of patients are identified by a dynamic time warping algorithm. Thus, the proposed system can achieve a high recognition rate of 98% for the defined rehabilitation actions for the various muscles. Moreover, the computational speed of the proposed system can reach 125 frames per second—the processing time per frame is less than 8 ms on a personal computer platform. This computational efficiency allows efficient extensibility for future developments to deal with complex ambient environments and for implementation in embedded and pervasive systems. The major contributions of the study are: (1) the proposed system is not only a physical exercise game, but also a movement training program for specific muscle groups; (2) The hardware of upper extremity rehabilitation system included a personal computer with personal computer and a depth camera. These are economic equipment, so that patients who need this system can set up one set at home; (3) patients can perform rehabilitation actions in sitting position to prevent him/her from falling down during training; (4) the accuracy rate of identifying rehabilitation action is as high as 98%, which is sufficient for distinguishing between correct and wrong action when performing specific action trainings; (5) The proposed upper extremity rehabilitation system is real-time, efficient to vision-based action identification, and low-cost hardware and software, which is affordable for most families.

Keywords: upper extremity identification; color and depth sensors; skeleton points; rehabilitation actions; home rehabilitation; computer vision

Yen-Lin Chen 1 , Chin-Hsuan Liu 1 , Chao-Wei Yu 1 , Posen Lee 2 and Yao-Wen Kuo 1

- Department Computer Science and Information Engineering, National Taipei University of Technology, Taipei 10608, Taiwan; ylchen@csie.ntut.edu.tw (Y.-L.C.); chinhsuanliu@gmail.com (C.-H.L.); david741002@gmail.com (C.-W.Y.); kent21221@gmail.com (Y.-W.K.)
- Department Occupational Therapy, I-Shou University, Kaohsiung 82445, Taiwan
- * Correspondence: posenlee@isu.edu.tw; Tel.: +886-7-657-7711 (ext. 7516)

(通訊作者非陳教授)

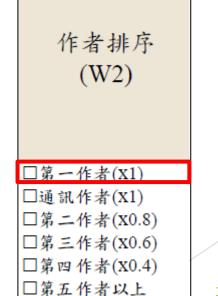

(x0.2)

33

續下頁

以莊賀喬教授之論文為例: 本篇文章莊教授為**通訊作者**,對應法規應**x1**



Electrochimica Acta



Sansevieria trifasciata biomass-derived activated carbon by supercritical-CO₂ route: Electrochemical detection towards carcinogenic organic pollutant and energy storage application

Shobana Sebastin Mary Manickaraj a,b,1, Sabarison Pandiyarajan a,b,1, Ai-Ho Liao c,d, Atchaya Ramachandran ^e, Sheng-Tung Huang ^a, Priyadharshini Natarajan ^f, Ho-Chiao Chuang ^b,

- Department of Chemical Engineering and Biotechnology, National Taipei University of Technology, Taipei 106344, Taiwan Department of Mechanical Engineering, National Taipei University of Technology, Taipei 106344, Taiwan
- Graduate Institute of Biomedical Engineering, National Taiwan University of Science and Technology, Taipei 106335, Taiwan
- Department of Biomedical Engineering, National Defense Medical Center, Taipei 114201, Taiwan
- PG & Research Department of Chemistry, Bishop Heber College, Tiruchirappalli 620017, India
- Syngene International Pvt., Ltd. Bangalore, India

ARTICLE INFO

Keywords: Activated carbon Sansevieria trifasciata Supercritical-CO-Electrochemical sensor Supercapacitor

ABSTRACT

Activated carbon (AC) has been widely used for electrochemical applications, such as electrochemical sensors, energy storage applications, etc., due to its fine porous structure, volumetric capacitance, and chemical stability. Supercritical-CO₂ (SC-CO₂) has a fascinating advantage in material science due to its microbubble cavitation. high diffusivity, and high permeability. In the shed of light, we developed a high porous Sansevieria trifasciata biomass-derived AC by SC-CO2 (SC-ST-AC). For comparison purposes, the AC was also prepared in a conventional approach (C-ST-AC). The prepared ACs were characterized through various spectroscopic and microscopic techniques to study their surface morphological character, structural analysis, and phase purity. The electrochemical performance was evaluated by two different applications: electrochemical detection and energy storage application. Based on the results, the SC-ST-AC exhibits higher porous architecture in their morphology and high phase purity with amorphous nature than C-ST-AC. In the preliminary electrochemical analysis, SC-ST-AC achieved higher performance than C-ST-AC. Thus, SC-ST-AC is applied to the real-time application and it exposed a superior limit of detection (0.005 µM L-1) and sensitivity (0.854 µA µM-1 cm-2) towards MA sensing and higher specific capacitance (342.5 F/g for 2 A/g) with 92.09 % of retention at high current density. Thereby, we suggest the SC-CO2 method is a promising approach to develop a highly porous carbon material with excellent electrochemical performance.

1. Introduction

In recent eras, carbon-based materials including one-dimension (1D) carbon nanotubes, carbon nanofibers [1,2], two-dimension (2D) graphene [3], three-dimension (3D) graphite, activated carbon, and its derivatives [4,5] have been extensively investigated as successful commercialization materials in several sectors. Among them activated carbon (AC) is considered the most cardinal material for electrochemical application owing to its high surface area, porous architecture, and chemical stability [6-8]. The varieties of functional group moiety fascinated on the surface make it as a promising electrode material for

energy storage applications [9]. Traditionally, the preparation of AC is done by the pyrolysis of fossil raw materials such as coal and petroleum coke or wood, followed by a physical or chemical activation process [10]. Due to the rapid increase of the global population and economy, the demand for energy and resources is also increasing exponentially, resulting in a lack of fossil fuels [11]. Therefore, cost-effective renewable carbon sources, the development of economic efficiency methods, and environmental safety are all issues that must be thoroughly investigated to produce advanced activated carbon that is more environmentally friendly. In this regard, biomass materials are presently recognized as the most viable candidates for preparing carbon materials

- * Corresponding author.
- E-mail address: hchuang@mail.ntut.edu.tw (H.-C. Chuang).
- Authors contributed equally.

https://doi.org/10.1016/j.electacta.2022.140672 Received 10 January 2022; Received in revised form 25 May 2022; Accepted 1 June 2022 Available online 3 June 2022 0013-4686/© 2022 Elsevier Ltd. All rights reserved.

Shobana Sebastin Mary Manickaraj a, b, 1, Sabarison Pandiyarajan a, b, 1, Ai-Ho Liao c, d Atchaya Ramachandran^e, Sheng-Tung Huang^a, Priyadharshini Natarajan^f, Ho-Chiao Chuang^b,

- ^a Department of Chemical Engineering and Biotechnology, National Taipei University of Technology, Taipei 106344, Taiwan
- Department of Mechanical Engineering, National Taipei University of Technology, Taipei 106344, Taiwan
- Graduate Institute of Biomedical Engineering, National Taiwan University of Science and Technology, Taipei 106335, Taiwan
- ^d Department of Biomedical Engineering, National Defense Medical Center, Taipei 114201, Taiwan
- e PG & Research Department of Chemistry, Bishop Heber College, Tiruchirappalli 620017, India

Corresponding author. (通訊作者)

Authors contributed equally.

^f Syngene International Pvt., Ltd. Bangalore, India

作者排序

- □第一作者(X1)
- □第二作者(X0.8)
- □第三作者(X0.6)
- □第四作者(X0.4)
- E-mail address: hchuang@mail.ntut.edu.tw (H.-C. Chuang) □第五作者以上 (x0.2)

以林律吟教授之論文為例:

本篇文章林教授為**第二作者**(作者順序為第二位),對應法規應x0.8



Contents lists available at ScienceDirect

Journal of Energy Storage

journal homepage: www.elsevier.com/locate/est



Research Papers

Novel incorporation of redox active organic molecule with activated carbon as efficient active material of supercapacitors



- rnational PhD Program in Biomedical Engineering, College of Biomedical Engineering, Taipei Medical University, Taipei 11031, Taiwan Graduate Institute of Nanomedicine and Medical Engineering, College of Biomedical Engineering, Taipei Medical University, Taipei 11031, Taiwan
- epartment of Chemical Engineering and Biotechnology, National Taipei University of Technology, Taipei, Taiwan institut de Recherche en Sciences de la Santé/Direction Régionale du Centre Ouest (IRSS/DRCO), BP 218, 11, Nanoro, Burkina Fasc

ARTICLE INFO

Activated carbon oulombic efficiency edox active organic compounds

Activated carbon (AC) is intensively applied as active material of supercapacitor (SC) due to high porosity and surface area. Incorporating battery-type materials in AC can enhance energy storage ability by generating redox reactions, but poor cycling stability of battery-type materials limits practical use of SC. Similar surface properties can be achieved by redox active organic compounds, which also possesses rich functional groups with extra redox ability. Unlike battery-type materials producing redox reactions from transition metals, incorporating organic molecule is expected to generate redox reactions without reducing cycling stability of AC. In this study, it is the first time to fabricate 1,4 benzene diboronic acid (DBA) and AC composite (DBA-AC) as active material of SC. The ratio of DBA and AC is optimized regarding to uniformity of DBA decoration. The optimized DBA-AC electrode presents a specific capacitance (CF) of 211.4 F/g at 20 mV/s, owing to the largest surface area and abundant functional groups. A flexible symmetric SC based on the optimized DBA-AC electrodes shows the maximum energy density of 0.761 Wh/kg at the power density of 400 W/kg. The CF retention of 110% and Coulombic efficiency higher than 95% after 10,000 times charge and discharge cycling process are also achieved.

Introduction

percapacito

Energy generation and storage devices are quite important to solve the series energy issues for human beings [1-5]. Energy storage devices are eagerly developed for solving serious energy shortage problems. The high energy and power densities are significant for energy storage devices [6,7]. The excellent high-rate performance and long cycle life are also required to achieve wider applications [8,9]. Supercapacitor (SC) with high power density and long cycle life comparing to battery is a omising energy storage device to investigate [10-12]. The energy density of SC is also higher than the traditional capacitor. The energy torage mechanism of SC is classified into two sorts, electric doubleayered capacitor (EDLC) and pseudocapacitor [13,14]. EDLC stores charges using ion adsorption and desorption mechanism, which pronotes cycling stability but causes small energy density due to lack of

Carbon materials are extensively used in SC applications due to their high conductivity, low cost and adaptable existing forms such as fibers, powders, and composites [16]. For instance, the carbon nanomaterials such as mesoporous carbon, activated carbon (AC) and graphitic nanocarbons with different morphologies including nanofibers, nanocoils, nanocones and nanotubes has been widely applied in EDLCs as electrode materials [17-20]. The capacitive and diffusive criteria of AC materials lie on the presence of mesopores in the structure. The high porosity can cially the hierarchical porosity can accelerate electrolyte in ion diffusion, and hence can improve ion accessibility electrode. Numerous studies utilized waste biographic very low costs and excellent surface proposes [21-24]. Ahmed and coworkers applied chemical activation activation reagent to fabricate orous AC from rotten carrot [25]. Gupta

ung@ntut.edu.tw (R.-J. Chung), ysibidou@gmail.com (S. Yougbaré).

eceived 16 February 2022; Received in revised form 10 May 2022; Accepted 10 June 2022

vailable online 9 July 2022 2352-152X/© 2022 Elsevier Ltd. All rights reserved.

as activation reagent in chemical process to

Tsung-Rong Kupa, * Lu-Yin Lin Subbiramaniyan Kubendhiran , Yi-Chiun Li . Ren-Jei Chung Sibidou Yougbare d 6

^a International PhD Program in Biomedical Engineering, College of Biomedical Engineering, Taipei Medical University, Taipei 11031, Taiwan b Graduate Institute of Nanomedicine and Medical Engineering, College of Biomedical Engineering, Taipei Medical University, Taipei 11031, Taiwan

35

- ^c Department of Chemical Engineering and Biotechnology, National Taipei University of Technology, Taipei, Taiwan
- ^d Institut de Recherche en Sciences de la Santé/Direction Régionale du Centre Ouest (IRSS/DRCO), BP 218, 11, Nanoro, Burkina Faso

作者排序

(通訊作者非林教授)

* Correspondence to: T.R. Kuo, International PhD Program in Biomedical Engineering, College of Biomedical Engineering, Taipe Taiwan.

E-mail addresses: trkuo@tmu.edu.tw (T.-R. Kuo), lylin@ntut.edu.tw (L.-Y. Lin), kubechem@gmail.com (S. Kubendhiran), rjchung@ntut.edu.tw (R.-J. Chung), vsibidou@gmail.com (S. Yougbaré).

□第一作者(X1)

□通訊作者(X1)

□第二作者(x0.8)

□第三作者(X0.6) □第四作者(X0.4)

□第五作者以上

(x0.2)

以林律吟教授之論文為例:

本篇文章林教授為**第三作者**(作者順序為第三位),對應法規應**x0.6**

Journal of Energy Storage 55 (2022) 105420 Contents lists available at ScienceDirect




Journal of Energy Storage



journal homepage: www.elsevier.com/locate/est

Research Papers





- Department of Chemical Engineering, Ming Chi University of Technology, New Taipei City 24301, Taiwan
- International PhD Program in Biomedical Engineering, College of Biomedical Engineering, Taipei Medical University, Taipei 11031, Taiwan
- Graduate Institute of Nanomedicine and Medical Engineering, College of Biomedical Engineering, Taipei Medical University, Taipei 11031, Taiwan Department of Chemical Engineering and Biotechnology, National Taipei University of Technology, Taipei, Taiwan
- Institut de Recherche en Sciences de la Santé (IRSS-DRCO)/Nanoro, 03 B.P 7192, Ouagadougou 03, Burkina Faso

ARTICLE INFO

α-Fe₂O₃ Carbonization Metal organic framework MIL101(Fe) Successive carbonization/oxidation Supercapacitor

Metal organic framework (MOF) with high surface area and tunable porous size is largely used as active material of supercapacitor (SC), MIL-101(Fe) composed of iron ions and terephthalic acid ligand is candidate active material of SC owing to its possible formation of carbon and iron compounds, Combining carbon and metal compound is feasible to establish efficient active material with ion adsorption/desorption and redox reaction charge storage abilities. In this study, it is the first time to investigate physical and electrochemical properties of MIL101(Fe) derivatives synthesized using carbonization and successive carbonization/oxidation processes as active materials of SC. Carbonization temperature of MIL-101(Fe) is optimized regarding to morphology, composition and defect/graphization ratio. The highest specific capacitance (Cg) of 95.7 F/g at 20 mV/s is obtained for the carbonized MIL-101(Fe) (MIL101(Fe)-C) prepared at 800 °C, due to rough surface, hollow structure and suitable defect to graphization ratio. The MIL-101(Fe) and the successive carbonization/oxidation synthesized derivative electrodes merely achieve C- values of 44.3 and 0.1 F/g, respectively. Symmetric SC fabricated using optimized MIL101(Fe)-C electrodes shows the maximum energy density of 1.13 Wh/kg at 400 W/kg and excellent cycling stability with CF retention of 96% and Columbic efficiency of 72% in 8000 times repeated charging/discharging cycles.

1. Introduction

To solve serious energy shortage problems, developing efficient energy generation and storage devices are of great significance for human beings in recent years [1-8]. Batteries and capacitors are traditional energy storage devices which store charges by generating redox reactions and adsorbing/desorbing ions via static electricity, respectively [9]. By combining advantages of battery and capacitor, supercapacitor (SC) has been considered as one of effective energy storage devices owing to high specific power and long cycle life. SC stores charges by both ion adsorption/desorption and redox reactions, which mainly occurs on carbon materials and metal compounds, respectively [10,11]. Therefore, incorporating carbon materials with metal compounds as active material of SC is widely adopted to achieve excellent energy storage ability such as high specific energy and power as well as excellent cycling stability [12-14].

Metal organic framework (MOF) has been intensively applied as active material of SC, due to its high surface area and tunable porous size [15-18]. MOF with iron centers such as MIL-101(Fe) composed of ordinated iron ions linked by terephthalic acid ligands is preactive material of SC, due to the possible conversions to conon material and iron compounds [19-21]. In previous studie, MIL-101(Fe) was commonly combined with carbon materials active material of SC. Liu et al. prepared growth-oriented Fe-base andOF synergized with graphene aerogels composite for SC 112. The carbonization process was also applied on MIL-101 to ricate carbon and metal oxide composites.

The authors contributed equally.

Received 2 June 2022; Received in revised form 9 July 2022; Accepted 29 July 2022 Available online 4 August 2022

2352-152X/© 2022 Elsevier Ltd. All rights reserved.

Yung-Fu Wu^{a,1}, Tsung-Rong Kuo^{b,c,1,*}, Lu-Yin Lin^d, Subbiramaniyan Kubendhiran^d, Kuan-Chen Lai^d, Tzu-Yang Chen^d, Sibidou Yougbare

- ^a Department of Chemical Engineering, Ming Chi University of Technology, New Taipei City 24301, Taiwan
- International PhD Program in Biomedical Engineering, College of Biomedical Engineering, Taipei Medical University, Taipei 11031, Taiwan
- ^c Graduate Institute of Nanomedicine and Medical Engineering, College of Biomedical Engineering, Taipei Medical University, Taipei 11031, Taiwan
- ^d Department of Chemical Engineering and Biotechnology, National Taipei University of Technology, Taipei, Taiwan
- ^e Institut de Recherche en Sciences de la Santé (IRSS-DRCO)/Nanoro, 03 B.P 7192, Ouagadougou 03, Burkina Faso

作者排序 (W2)

* Corresponding author at: International PhD Program in Biomedical Engineering, College of Biomedical Engineering, Taipei Medical University, Taipei 11031,

E-mail address: trkuo@tmu.edu.tw (T.-R. Kuo).

The authors contributed equally,

(通訊作者非林教授)

□第一作者(X1)

□通訊作者(X1)

□第二作者(X0.8)

□第三作者(x0.6)

□第四作者(X0.4)

□第五作者以上

(x0.2)

36

Corresponding author at: International PhD Program in Biomedical Engineering, College of Biomedical Engineering, Taipei Medical University, Taipei 11031,

E-mail address: trkuo@tmu.edu.tw (T.-R. Kuo)

以陳生明教授之論文為例:

本篇文章陳教授為**第四作者**(作者順序為第四位),對應法規應x0.4

Contents lists available at ScienceDirect

Journal of Alloys and Compounds

journal homepage: www.elsevier.com/locate/jalcom



Research Article

Direct Z-scheme WO₃/In₂S₃ heterostructures for enhanced photocatalytic reduction Cr(VI)



- * Key Laboratory of Education Ministry for Soft Chemistry and Functional Materials, Nanjing University of Science and Technology, Nanjing 210094, China ^b Advanced Analysis and Testing Center, Nanjing Forestry University, Nanjing 210037, China
- Department of Chemical Engineering and Biotechnology, National Taipei University of Technology, Taipei 106, Taiwan, ROC
- d College of Chemistry and Material Engineering, Quzhou University, Quzhou, Zhejiang 324000, China

ARTICLE INFO

Article history: Received 24 May 2021 Received in revised form 2 March 2022 Accepted 7 March 2022 Available online 11 March 2022

Keywords: In₂S₃

Z-scheme photocatalyst Photocatalytic Cr (VI) reduction

The design of efficient and stable photocatalysts for the removal of heavy metals in the environment has become a research hotspot. Here, a composite photocatalyst with three-dimensional In-S2 microspheres supported by WO3 nanoparticles was synthesized for the photoreduction of Cr(VI) for the first time. The constructed composite catalyst has a direct Z-scheme electron transport mechanism without any precious metals (Au, Pt, and Ag), quantum dots (TiO2 QDs) or carbon materials (Graphene) as electronic media. Constructing a direct Z-scheme WO₃/In₂S₃ photocatalyst can greatly retain the reduction and oxidation reaction sites on the surface of the heterojunction and accelerate the reduction reaction. Under visible light irradiation, it greatly promotes the photocatalytic reduction of Cr(VI), which is 67.7 times and 3.6 times the reduction rates of WO3 and In2S3, respectively. The favorable photocatalytic performance of WO3/In2S3 should be attributed to the effective interfacial contact between the semiconductors in the Z-scheme system, thereby realizing effective electron transfer and charge separation. In addition, the stability of WO₃/ In₂S₃ was studied, and a possible mechanism in the photoreduction process of Cr(VI) was proposed. © 2022 Elsevier B.V. All rights reserved.


1 Introduction

With the development of industry, potentially toxic metals ions pose a major threat to the water environment [1-3]. As a common metal-chromium ions, it is widely used in electroplating, leather tanning, steelmaking, and chemical manufacturing [4-6]. Since Cr (VI) has a regular tetrahedral structure similar to PO₄3- and SO₄2-, it can easily enter cells through anion channels, which seriously affects human health and safety [7]. In 2019, chromium compounds with hexavalent were included in the list of toxic and harmful water pollutants. As we all know, Cr(III) as a trace element of the human body, has the advantages of low mobility in aquatic environment and easy formation of Cr(OH)3 precipitation in neutral or alkaline environments, which has become an effective way

precipitate [9]. This methods was prone to produce secondary

to solve the pollution of Cr(VI) [8]. Generally, the sulfite or ferrous salt was used in industry to reduce Cr(VI) to Cr(III) in an acidic environment, and then alkali treatment is performed to obtain waste and SO2, which poses environmental hazards. I recent years, semiconductor photocatalysts have been go crated electron-hole pairs under light excitation, in which electrons have strong reducibility without any pollution, and can be used to reduce Cr(VI) [10]. Wang et al. prepared eO2 nanotubes by a surfactant-assisted hydrothermal method for photoreduction of Cr (VI). The pure CeO2 has weak plotoreduction performance without adding oxalic acid [11]. Pars group reported the use of ZnO to

The photocatissis has become a "green technology" for addressing environmental problems. To achieve the goal of photoof Cr(VI), photocatalysts need to have narrower band gaps, negative conduction band (CB) sites, and more positive valence nd (VB) sites. This is difficult for a single photocatalytic material to have at the same time. The heterojunction catalytic system with Zscheme electron transport mechanism can not only decrease the photo-generated electron-hole recombination rate, but also retain



- ^a Key Laboratory of Education Ministry for Soft Chemistry and Functional Materials, Nanjing University of Science and Technology, Nanjing 210094, China Advanced Analysis and Testing Center, Nanjing Forestry University, Nanjing 210037, China
- Department of Chemical Engineering and Biotechnology, National Taipei University of Technology, Taipei 106, Taiwan, ROC
- College of Chemistry and Material Engineering, Quzhou University, Quzhou, Zhejiang 324000, China

Corresponding author at: Key Laboratory of Education Ministry for Soft Chemistry

作者排序 (W2)

- and Functional Materials, Nanjing University of Science and Technology, Nanjing
 - (通訊作者非陳教授) Corresponding author.

E-mail addresses: mzhang.chemmater@gzc.edu.cn (M. Zhang),

xhliu@njust.edu.cn (X. Liu).

210094, China

- □第一作者(X1)
- □通訊作者(X1)
- □第二作者(x0.8)
- □第三作者(X0.6)
- □第四作者(X0.4)
- □第五作者以上 (x0.2)

Corresponding author at: Key Laboratory of Education Ministry for Soft Chemistry and Functional Materials, Nanjing University of Science and Technology, Nanjing 210094, China

Corresponding author E-mail addresses: n t.edu.cn (X. Liu).

0925-8388/© 2022 Elsevier B.V. All rights reserved

續下頁

以莊賀喬教授之論文為例:

本篇文章莊教授為**第五作者**(作者順序為第五位),對應法規應**x0.2**

Received: 19 May 2022 Revised: 29 October 2022 Accepted: 8 November 2022

DOI: 10.1002/htm2.10450

RESEARCH ARTICLE

BIOENGINEERING & TRANSLATIONAL MEDICINE

Combined use of microbubbles of various sizes and single-transducer dual-frequency ultrasound for safe and efficient inner ear drug delivery

Ai-Ho Liao ^{1,2} | Chih-Hung Wang ^{3,4} | Bo-Han Wang ⁵ | Yi-Chun Lin ⁴ Ho-Chiao Chuang | Hao-Li Liu | Cheng-Ping Shih | 0

Graduate Institute of Biomedical Engineering, National Taiwan University of Science and Technology, Taipei, Taiwan

Department of Biomedical Engineering, National Defense Medical Center, Taipei, Taiwan

Department of Mechanical Engineering, National Taipei University of Technology, Taipei, Taiwar

Department of Electrical Engineering, National Taiwan University, Taipei, Taiwan

Cheng-Ping Shih, Department of Otolaryngology-Head and Neck Surgery. Tri-Service General Hospital, National Def Medical Center, No. 325, Sec. 2, Chenggong Rd., Neihu District, Taipei City 11490, Tair Email: eric660802@gmail.com.

Ministry of Science and Technology, Taiwan, Grant/Award Numbers: MOST108-2221-E-011-161-MY4, MOST110-2314-B-016-047-MY3_MOST110-2314-R-016-045 MOST109-2314-B-016-005: National Taiwa Grant/Award Numbers: NTUST-TSGH-110-01. NTUST-TSGH-111-01: Tri-Service General Hospital, Grant/Award Numbers: TSGH-D-111059, TSGH-A-111001, TSGH-A-110001; Medical Affairs Bureau, Ministry of National Defense, ROC, Grant/Award Number MAB-D-111145

We have previously applied ultrasound (US) with microbubbles (MBs) to enhance oner ear drug delivery, with most experiments conducted using single-frequency, high-power a sity US, and multiple treatments. In the present study, the treatment by concerns were addressed using a combination of low-power-density, single-transducer, duarn, sency US (I_{SPTA} = 213 mW/cm²) and MBs of different sizes coated with insulin-like growth factor (IGF-1). This study is the first to investigate the drug-coating capacity of human serum albumin of different particle sizes and their drug delivery efficiency. The concentration of HSA was adjusted to produce different MB sizes. The drug-coating efficiency was significantly higher for large-sized MBs than for smaller MBs. In vitro Franz diffusion experiments showed that the combination of dual-frequency US and large MB size delivered the most IGF-1 (24.3 ± 0.47 ng/cm2) to the receptor side at the second hour of treatment. In an in vivo guinea pig experiment, the efficiency of IGF-1 delivery into the inner ear was 15.9 times greater in animals treated with the combination of dual-frequency US and large MBs (D-USMB) than in control animals treated with round window soaking (RWS). The IGF-1 delivery efficiency was 10.15 times greater with the combination of single-frequency US and large size MBs (S-USMB) than with RWS. Confocal microscopy of the cochlea showed a stronger distribution of IGF-1 in the basal turn in the D-USMB and S-USMB groups than in the RWS group. In the second and third turns, the D-USMB group showed the greatest IGF-1 distribution.

Ai-Ho Liao and Chih-Hung Wang contributed equally to this study

This is an open access article under the terms of the Creative Commons Attribution License, which permits use, distribution and reproduction in any medium provided the original work is properly cited.

© 2022 The Authors, Bioengineering & Translational Medicine published by Wiley Periodicals LLC on behalf of American Institute of Chemical Engineers

Bioena Transl Med. 2023:8:e10450 tos://doi.org/10.1002/btm2.10450 wileyonlinelibrary.com/journal/btm2 1 of 14

zhengping_shi@yahoo.com.tw

Ai-Ho Liao 1,2 1 Chih-Hung Wang 3,4 2 Bo-Han Wang 3 Yi-Chun Lin 4 Ho-Chiao Chuang 5 Hao-Li Liu 6 Cheng-Ping Shih 3 7 Graduate Institute of Biomedical Engineering, National Taiwan University of Science and Technology, Taipei, Taiwan ²Department of Biomedical Engineering, National Defense Medical Center, Taipei, Taiwan ³Department of Otolaryngology-Head and Neck Surgery, Tri-Service General Hospital, National Defense Medical Center, Taipei, Taiwan ⁴Graduate Institute of Medical Sciences, National Defense Medical Center, Taipei, Taiwan Department of Mechanical Engineering, National Taipei University of Technology, Taipei, Taiwan Department of Electrical Engineering, National Taiwan University, Taipei, Taiwan 作者排序 (W2)Correspondence (通訊作者非莊教授) Cheng-Ping Shih, Department of Otolaryngology-Head and Neck Surgery. □第一作者(X1) Tri-Service General Hospital, National Defense □通訊作者(X1) Medical Center, No. 325, Sec. 2, Chenggong Rd., Neihu District, Taipei City 11490, Taiwan. □第二作者(x0.8) Email: eric660802@gmail.com, □第三作者(X0.6)

38

□第四作者(X0.4)

□第五作者以上

(x0.2)

查詢W2方式

注意事項:

- 1. 需檢附論文第一頁為佐證資料。
- 2. 第一作者到第五作者依由左至右的順序排列。
- 3. 通訊作者通常會使用*字號、或是下方會有一欄 Corresponding author的部份,如還查不到的 話建議使用WOS查詢。

WOS查詢畫面: An Upper Extremity Rehabilitation System Using Efficient Vision-Based

Action Identification Techniques Chen, YL (Chen, Yen-Lin) [1]; Liu, CH (Liu, Chin-Hsuan) [1]; Yu, CW (Yu, Chao-Wei) [1]; Lee, P (Lee, Posen) [2]; Kuo, YW (Kuo, Yao-Wei) [1]; Lee, P (Lee, Posen) [2]; Kuo, YW (Kuo, Yao-Wei) [1]; Lee, P (Lee, Posen) [2]; Kuo, YW (Kuo, Yao-Wei) [1]; Lee, P (Lee, Posen) [2]; Kuo, YW (Kuo, Yao-Wei) [1]; Lee, P (Lee, Posen) [2]; Kuo, YW (Kuo, Yao-Wei) [1]; Lee, P (Lee, Posen) [2]; Kuo, YW (Kuo, Yao-Wei) [1]; Lee, P (Lee, Posen) [2]; Kuo, YW (Kuo, Yao-Wei) [1]; Lee, P (Lee, Posen) [2]; Kuo, YW (Kuo, Yao-Wei) [1]; Lee, P (Lee, Posen) [2]; Kuo, YW (Kuo, Yao-Wei) [1]; Lee, P (Lee, Posen) [2]; Kuo, YW (Kuo, Yao-Wei) [1]; Lee, P (Lee, Posen) [2]; Kuo, YW (Kuo, Yao-Wei) [1]; Lee, P (Lee, Posen) [2]; Kuo, YW (Kuo, Yao-Wei) [1]; Lee, P (Lee, Posen) [2]; Kuo, YW (Kuo, Yao-Wei) [1]; Lee, P (Lee, Posen) [2]; Kuo, YW (Kuo, Yao-Wei) [2]; Lee, P (Lee, Posen) [2]; Kuo, YW (Kuo, Yao-Wei) [2]; Lee, P (Lee, Posen) [2]; Kuo, YW (Kuo, Yao-Wei) [2]; Lee, P (Lee, Posen) [2]; Lee, P (Le View Web of Science ResearcherID and ORCID (provided by Clarivate) Source APPLIED SCIENCES-BASEL Volume: 8 Issue: 7 DOI: 10.3390/app8071161 Article Number Published JUL 2018 2018-09-07 Document Type Article This study proposes an action identification system for home upper extremity rehabilitation. In the proposed system, we apply an RGB-depth (color-depth) sensor to capture the image sequences of the patient's upper extremity actions to identify its movements. We apply a skin color detection technique to assist with extremity identification and to build up the upper extremity skeleton points. We use the dynamic time warping algorithm to determine the rehabilitation actions. The system presented herein builds up upper extremity skeleton points rapidly. Through the upper extremity of the human skeleton and human skin color information, the upper extremity skeleton points are effectively established by the proposed system, and the rehabilitation actions of patients are identified by a dynamic time warping algorithm. Thus, the proposed system can achieve a high recognition rate of 98% for the defined rehabilitation actions for the various muscles. Moreover, the computational speed of the proposed system can reach 125

Author Information Corresponding Address: Lee, Posen (corresponding author)

▲ I Shou Univ, Dept Occupat Therapy, Kaohsiung 82445, Taiwan

Author Keywords: upper extremity identification; color and depth sensors; skeleton points; rehabilitation actions; home rehabilitation; computer vision

frames per second-the processing time per frame is less than 8 ms on a personal computer platform. This computational efficiency

game, but also a movement training program for specific muscle groups; (2) The hardware of upper extremity rehabilitation system included a personal computer with personal computer and a depth camera. These are economic equipment, so that patients who need this system can set up one set at home; (3) patients can perform rehabilitation actions in sitting position to prevent him/her from falling down during training; (4) the accuracy rate of identifying rehabilitation action is as high as 98%, which is sufficient for distinguishing between correct and wrong action when performing specific action trainings; (5) The proposed upper extremity rehabilitation system is real-time, efficient to vision-based action identification, and low-cost hardware and software, which is

allows efficient extensibility for future developments to deal with complex ambient environments and for implementation in embedded and pervasive systems. The major contributions of the study are: (1) the proposed system is not only a physical exercise

Keywords Plus: COST-EFFECTIVENESS; TELEMEDICINE; CARE; BALANCE; TELEHEALTH; TOOL

Author Information Corresponding Address: Lee, Posen (corresponding author)

Keywords

affordable for most families.

I Shou Univ, Dept Occupat Therapy, Kaohsiung 82445, Taiwan

查詢W3方式

依ppt第30.31頁方式下載論文檔案

以莊賀喬教授之論文為例: (只有一位通訊作者之狀況)

本篇文章通訊作者只有一位,對應法規應x1



Electrochimica Acta



Sansevieria trifasciata biomass-derived activated carbon by supercritical-CO₂ route: Electrochemical detection towards carcinogenic organic pollutant and energy storage application

Shobana Sebastin Mary Manickaraj a, b, 1, Sabarison Pandiyarajan a, b, 1, Ai-Ho Liao c, d, Atchaya Ramachandran ^e, Sheng-Tung Huang ^a, Priyadharshini Natarajan ^f, Ho-Chiao Chuang ^{b,}

- Department of Chemical Engineering and Biotechnology, National Taipei University of Technology, Taipei 106344, Taiwan
- Department of Mechanical Engineering, National Taipei University of Technology, Taipei 106344, Taiwan Graduate Institute of Biomedical Engineering, National Taiwan University of Science and Technology, Taipei 106335, Taiwan
- Department of Biomedical Engineering, National Defense Medical Center, Taipei 114201, Taiwan
- PG & Research Department of Chemistry, Bishop Heber College, Tiruchirappalli 620017, India
- Syngene International Pyt., Ltd. Rangalore, India

ARTICLE INFO

Keywords: Activated carbon Sansevieria trifasciat Supercritical-CO₂ Electrochemical sen

Supercapacitor

Activated carbon (AC) has been widely used for electrochemical applications, such as electrochemical sensors, energy storage applications, etc., due to its fine porous structure, volumetric capacitance, and chemical stability. Supercritical-CO2 (SC-CO2) has a fascinating advantage in material science due to its microbubble cavitation, high diffusivity, and high permeability. In the shed of light, we developed a high porous Sansevieria trifasciata biomass-derived AC by SC-CO2 (SC-ST-AC). For comparison purposes, the AC was also prepared in a conventional approach (C-ST-AC). The prepared ACs were characterized through various spectroscopic and microscopic techniques to study their surface morphological character, structural analysis, and phase purity. The electrochemical performance was evaluated by two different applications: electrochemical detection and energy storage application. Based on the results, the SC-ST-AC exhibits higher porous architecture in their morphology and high phase purity with amorphous nature than C-ST-AC. In the preliminary electrochemical analysis, SC-ST-AC achieved higher performance than C-ST-AC. Thus, SC-ST-AC is applied to the real-time application and it exposed a superior limit of detection (0.005 μ M L $^{-1}$) and sensitivity (0.854 μ A μ M $^{-1}$ cm $^{-2}$) towards MA sensing and higher specific capacitance (342.5 F/g for 2 A/g) with 92.09 % of retention at high current density. Thereby, we suggest the SC-CO2 method is a promising approach to develop a highly porous carbon material with excellent electrochemical performance.

In recent eras, carbon-based materials including one-dimension (1D) carbon nanotubes, carbon nanofibers [1,2], two-dimension (2D) graphene [3], three-dimension (3D) graphite, activated carbon, and its derivatives [4,5] have been extensively investigated as successful commercialization materials in several sectors. Among them activated carbon (AC) is considered the most cardinal material for electrochemical application owing to its high surface area, porous architecture, and chemical stability [6-8]. The varieties of functional group moiety fascinated on the surface make it as a promising electrode material for

energy storage applications [9]. Traditionally, the preparation of AC is done by the pyrolysis of fossil raw materials such as coal and petroleum coke or wood, followed by a physical or chemical activation process [10]. Due to the rapid increase of the global population and economy, the demand for energy and resources is also increasing exponentially, resulting in a lack of fossil fuels [11]. Therefore, cost-effective renewable carbon sources, the development of economic efficiency methods, and environmental safety are all issues that must be thoroughly investigated to produce advanced activated carbon that is more environmentally friendly. In this regard, biomass materials are presently recognized as the most viable candidates for preparing carbon materials

- Corresponding author.
- E-mail address: hchuang@mail.ntut.edu.tw (H.-C. Chuang). Authors contributed equally.

Received 10 January 2022; Received in revised form 25 May 2022; Accepted 1 June 2022 Available online 3 June 2022 0013-4686/© 2022 Elsevier Ltd. All rights reserved

Shobana Sebastin Mary Manickaraj a,b,1, Sabarison Pandiyarajan a,b,1, Ai-He Liao c,d, Atchaya Ramachandran ^e, Sheng-Tung Huang ^a, Priyadharshini Natarajan ^f, Ho-Chiao Chuang ^{b, †}

- ^a Department of Chemical Engineering and Biotechnology, National Taipei University of Technology, Taipei 106344, Taiwan
- Department of Mechanical Engineering, National Taipei University of Technology, Taipei 106344, Taiwan
- ^c Graduate Institute of Biomedical Engineering, National Taiwan University of Science and Technology, Taipei 106335, Taiwan
- ¹ Department of Biomedical Engineering, National Defense Medical Center, Taipei 114201, Taiwan
- ^e PG & Research Department of Chemistry, Bishop Heber College, Tiruchirappalli 620017, India

Corresponding author. (通訊作者)

Authors contributed equally.

Syngene International Pvt., Ltd. Bangalore, India

共同作者數 (W3)

- □無(x1)
- □1位通訊作者 (x1)
- □2位(含)以上通 訊作者(x0.8)
- □有多位作者 Egual Contribution

(x0.8)

E-mail address: hchuang@mail.ntut.edu.tw (H.-C. Chuang)

以莊賀喬教授之論文為例: (有兩位通訊作者之狀況)

本篇文章通訊作者有**兩位且均為國內學者**,對應法規應x0.8



Contents lists available at ScienceDirec

Biomedical Signal Processing and Control

journal homepage: www.elsevier.com/locate/bspc



Combining the wavelet transform with a phase-lead compensator to a respiratory motion compensation system with an ultrasound tracking technique in radiation therapy



- Department of Radiation Oncology, Taipei Medical University Hospital, Taipei, Taiwan
- Graduate Institute of Biomedical Engineering, National Taiwan University of Science and Technology, Taipei, Taiwan
- Department of Biomedical Engineering, National Defense Medical Center, Taipei, Taiwan
- Department of Radiation Oncology, Wan Fang Hospital, Taipei Medical University, Taipei, Taiwan School of Health Care Administration, College of Management, Taipei Medical University, Taipei, Taiwan
- School of Biomedical Engineering, College of Biomedical Engineering, Taipei Medical University, Taipei, Taiwan
- Department of Mechanical Engineering, National Taipei University of Technology, Taipei, Taiwan
- School of Dentistry, College of Oral Medicine, Taipei Medical University, Taipei, Taiwan
- Department of Radiology, School of Medicine, College of Medicine, Taipei Medical University, Taipei, Taiwan
- 'aipei Cancer Center, Taipei Medical University, Taipei, Taiwan
- Department of Industrial Chemistry, Alagappa University, Karaikudi 630001, Tamil Nadu, India

ARTICLE INFO

Respiratory motion compensation Ultrasound image tracking

ABSTRACT

This study evaluated the feasibility of applying the wavelet transform (WT) combined with a phase-lead compensator (PLC) to our previously developed two-dimensional respiratory motion compensation system (RMCS). This system automatically and instantaneously adjusts PLC parameters according to different respiration signals to reduce influences of the system delay time, improving the compensation effect of the RMCS during respiratory motion compensation. This study performed respiratory movement compensation experiments with a two-dimensional respiratory motion simulation system (RMSS) and the RMCS. Human respiratory signals were captured using our previously developed ultrasound image tracking algorithm (UITA). In this study, a displacement compensation RMCS algorithm based on the combination of WT and PLC was developed by Lab-VIEW, which allows an automatic adjustment of the PLC parameters according to various respiratory waveforms, achieving a better compensation effect. The experiment results indicated that the compensation rate (CR) of right-left and superior-inferior directions had both improved 67.96-88.05% and 70.38-91.43%, respectively. In this study, the proposed method combined with WT and PLC applied in respiratory movement compensation experiments; the UITA was used for tracking diaphragm motion which substitutes for tumor motion. This noninvasive monitoring method also helps reduce side effects after treatment. The experimental results indicated that the effect of using the WT combined with the PLC to compensate for various respiratory signals was improved over our previously developed compensation algorithm

1. Introduction

During radiotherapy, the anatomical structure and location of a lesion are usually different from those of the target used in the treatment planning system. One of the main reasons for this is the organ movement that occurs while breathing, which also causes the tumor to deviate from the original irradiation target position during the treatment [1-3]. The

Corresponding authors.

Received 21 March 2022; Received in revised form 23 May 2022; Accepted 12 June 2022 Available online 17 June 2022 1746-8094/© 2022 Elsevier Ltd. All rights reserved.

tumor movement makes actual dose distribution differ from the expected dose distribution, resulting insufficient dose coverage on target tumor and excessive dose on surrounding tissues. The unwanted dose distribution increases serious side effects and great reduction of treatment effectiveness. Langen et al. [4] documented many types of organ movements, including types of the liver, diaphragm, kidney, pancreas, lung tumors, and prostate. Diaphragm and liver are affected by

Chia-Chun Kuo a,d,e, Ming-Lu Guo g, Ai-Ho Liao b,c, Hsiao-Wei Yu a,f, Muthusankar Ganesan g,k, Chu-Wei Li^g, Shiu-Chen Jeng^{a,h}, Jeng-Fong Chiou^{a,i,j}, <u>Lai-Lei Ting^{a,*}</u> Ho-Chiao Chuang^{g,*}

- a Department of Radiation Oncology, Taipei Medical University Hospital, Taipei, Taiwan
- Description of Property of
- Department of Biomedical Engineering, National Defense Medical Center, Taipei, Taiwan
- ^d Department of Radiation Oncology, Wan Fang Hospital, Taipei Medical University, Taipei, Taiwan
- School of Health Care Administration, College of Management, Taipei Medical University, Taipei, Taiwan
- School of Biomedical Engineering, College of Biomedical Engineering, Taipei Medical University, Taipei, Taiwan
- ⁸ Department of Mechanical Engineering, National Taipei University of Technology, Taipei, Taiwan
- h School of Dentistry, College of Oral Medicine, Taipei Medical University, Taipei, Taiwan
- i Department of Radiology, School of Medicine, College of Medicine, Taipei Medical University, Taipei, Taiwan
- Taipei Cancer Center, Taipei Medical University, Taipei, Taiwan
- ^k Department of Industrial Chemistry, Alagappa University, Karaikudi 630001, Tamil Nadu, India

(通訊作者)

Corresponding authors.

E-mail addresses: llt1957@gmail.com (L.-L. Ting), hchuang@mail.ntut.edu.tw (H.-C. Chuang).

共同作者數 (W3)

□無(x1)

□1位通訊作者

(x1)

□2位(含)以上通 訊作者(x0.8)

□有 多位作者 Egual Contribution (x0.8)

以莊賀喬教授之論文為例: (有兩位通訊作者之狀況) 本篇文章通訊作者有**兩位**,除莊教授外另外一位為**國外學者**,對應法規應**x1**



Contents lists available at ScienceDirect

Journal of Alloys and Compounds



journal homepage: www.elsevier.com/locate/jalcom

Robust fabrication of silver pyro-vanadates via sonochemical approach for advanced energy storage application



Sabarison Pandiyarajan a,b, Rajkumar Srinivasan Shobana Sebastin Mary Manickaraj a,b, Ho-Chiao Chuang b.*, Princy Merlin Johnson c.

- Department of Chemical Engineering, National Taipei University of Technology, Taipei 10608, Taiwan
- b Department of Mechanical Engineering, National Taipei University of Technology, Taipei 10608, Taiwan PG and Research Department of Chemistry, Bishop Heber College, Bharathidasan University, Tiruchirappalli, India

ARTICLE INFO

Received 14 June 2021 Received in revised form 9 September 2021 Accepted 5 October 2021 Available online 8 October 2021

Keywords:

Silver pyro-vanadates Ultrasonication, Specific capacity Energy storage systems

One of the major challenges in the twenty-first century is the development of ultrahigh performance electrical energy storage (ES) devices with faster, safer, and more efficient ES materials. Herein, we report newly designed silver vanadates (AgaV2O2), which serve as significant electrode material for upcoming ES devices due to its greater electrical conductivity as well as electrochemical activity, Ag₄V₂O₇ were synthesized by the ultrasonication method. The as-synthesized material was characterized with various spectral as well as analytical methods. Furthermore, the supercapacitive property of Ag₄V₂O₇ was evaluated using different electroanalytical techniques. The Ag₄V₂O₇ electrode exhibited well electrochemical performance with a specific capacity (C_{sp}) of 548 C g^{-1} at the current density of 1 Ag^{-1} and significant capacity retention of 88.7% even after 5000 GCD cycles at 6 Ag-1. The lowest value of charge transfer resistance (R_{st} = 4.12 Ω), and equivalent series resistance (ESR =6.33 Ω) exposed the faster reaction kinetics. The superior electrochemical performance was ascribed to its unique structure, which contributes to high conductivity. easy electron transfer, short ion diffusion distances, fast kinetics as well as a huge number of active sites in the electrode material. The electrochemical results demonstrated that Ag₄V₂O₇ could be utilized as electroactive material for advanced energy storage systems.

© 2021 Elsevier B.V. All rights reserved.

Energy crisis is one of the most pressing problems in the current scenario. Considerations about greenhouse effect have prompted researchers to perform a detailed investigation on energy conversion as well as storage technology [1]. In order to solve this issue, fuel cells, batteries and supercapacitors have become more popular as strong candidates [2]. Supercapacitors (SCs) have received a lot of attention as a type of high-efficiency energy storage device because they can deliver more power density with a longer cycling lifespan than batteries and store more energy density than conventional capacitors. Furthermore, due to their rapid rechargeability, much greater cycling stability, and higher rate capability, SCs are good alternatives for a battery replacement if their energy density is significantly high [3-6].

.com (S. Pandiyarajan), ail.ntut.edu.tw (H.-C. Chuang), pmej_68

Based on the principle of charge storage process, there are three types of SCs: the electric double layer (EDLC) [7], pseudocapacitors (PCs) [8] as well as hybrid capacitors [9]. The former is distinguished primarily via ion as well as electron separation at the electrode/electrolyte interface, while a Faradaic charge transfer reaction takes place at the active material in a redox pseudo capacitor. Hybrid capacitors are operating by the combination of Faradaic as well as Non-Faradaic reactions. Many researchers have made great efforts to study PCs because their energy density is substantially higher than EDLCs [10,11].

Because of the large C_{sp} and superlative redox activity, transition metal oxides (TMOs) have been found to be promising as electrodes for PCs over the last few decades [12-14]. Several TMOs, like RuO2, MnO2, NiO, Co3O4, MoO2, and SnO2, were efficiently used as electrode materials in PCs. During the charge/discharge processes, PCs with these kinds of electrodes invariably exhibited poor stability, high resistance as well as large volume changes [15]. To address this concern, mixed TMOs have emerged as promising electrodes for SCs stability, specific capacity as well as electrical conductivity[16]. Among the TMOs, mixed metal oxides, binary,

Sabarison Pandiyarajan a,b, Rajkumar Srinivasan Shobana Sebastin Mary Manickaraj b, Ho-Chiao Chuang^{b,*}, Princy Merlin Johnson^{c,*}

- ^a Department of Chemical Engineering, National Taipei University of Technology, Taipei 10608, Taiwan
- b Department of Mechanical Engineering, National Taipei University of Technology, Taipei 10608, Taiwan
- ^c PG and Research Department of Chemistry, Bishop Heber College, Bharathidasan University, Tiruchirappalli, India

共同作者數 (W3)

□ 無(x1)

□1位通訊作者

(x1)

□2位(含)以上通 訊作者(x0.8)

□有多位作者 Egual

Contribution

(x0.8)

(通訊作者)

Corresponding authors.

E-mail addresses: sabarison6@gmail.com (S. Pandiyarajan), hchuang@mail.ntut.edu.tw (H.-C. Chuang), pmej_68@yahoo.co.in (P.M. Johnson).

0925-8388/© 2021 Elsevier B.V. All rights reserved.

以林律吟教授之論文為例: (有多位共同貢獻作者之狀況)

本篇文章有多位Equal Contribution,對應法規應x0.8



Contents lists available at ScienceDirect

Journal of Alloys and Compounds





Investigating energy storage ability of ZIF67-derived perovskite fluoride via tuning ammonium fluoride amounts



Department of Chemical Engineering and Biotechnology, National Taipei University of Technology, Taipei, Taiwan Research Center of Energy Conservation for New Generation of Residential, Commercial, and Industrial Sectors, Taipei, Taiwan

ARTICLE INFO

Article history Received 7 July 2021 Received in revised form 25 September 2021 Accepted 28 September 2021 Available online 29 September 2021

Ammonia fluoride Ligand Permyskite Supercapacito 2-methylimidazole

Zeolitic imidazolate framework 67 (ZIF67) is widely considered as potential active material for supercapacitors (SC) due to large surface area and tunable structures, but small electrical conductivity limits its energy storage ability. Fluoride with high electrical conductivity is reported to be beneficial on reducing charge-transfer resistance of SC. In this study, ZIF67-derived perovskite fluoride is synthesized using ammonium fluoride (NH₄F) as electroactive material of SC at the first time. Different NH₄F amounts are used to produce perovskite ZIF67-derived fluorides (ZIF67-N). The optimized ZIF67-N electrode shows specific capacitance (CF) of 636.8 F/g at 10 mV/s, owing to small particle size and suitable F to 2-methylimidazole ratio for providing high electronegativity. The ZIF67 and cobalt nickel fluoride prepared using NH₄F but no 2-methylimidazole (CoNi-N) are synthesized to understand roles of fluorine and 2-methylimidazole on energy storage. The ZIF67 electrode shows much smaller CF (1.6 F/g) than ZIF67-N electrode, owing to largely enhanced pore width of ZIF67-N even if surface area is largely reduced when NH₄F is added during synthesis. The SC comprising optimized ZIF67-N electrodes shows maximum energy density of 27.2 Wh/kg at 650.0 W/kg as well as CF retention of 86% and Coulombic efficiency of 100% in 8000 times charge/ discharge process.

© 2021 Elsevier B.V. All rights reserved.

amorphous carbon@graphite carbon nanoleaves by carbonization of ZIF-L(Zn)@ZIF67 nanoleaves and achieved C_F of 252.1 F/g [10].

Combining ZIF67 with carbon materials is also applied to improve

energy storage ability of ZIF67 [11,12]. Jian et al. designed cobalt

sulfide nanocage derived from ZIF interconnected by carbon nano-

tubes as electrode material for SC [11]. Sundriya et al. synthesized

ZIF67 and reduced graphene oxide (rGO) composite using stirring

ifying the process of forming MOF derivatives at the very beginning.

Also, the nature of MOF derivatives could be much easier to design

using in-situ techniques. It was reported that ligand plays important

roles on intrinsic properties of MOF, such as chemical stability, ri-

gidity and flexibility [13-15]. Lv et al. proposed that stability of MOF

relies on robustness of metal ion/ligand coordination bonds. They

demonstrated a ligand-rigidification strategy to enhance stability of MOF, including thirteen Zr-based MOF constructed with Zr-O-(OF

ergy storage ability. Ammonium fluoride has been reported to play

derivatives may be possible to improve the en-

However, comparing to the ex-situ method, the in-situ method is more likely to reduce the experimental process via directly mod-

approach and obtained CF of 326 F/g at 3 A/g [12].

(-CO₂)_n units and corresponding ligan

Metal organic framework (MOF) with high surface area and tunable structure has been largely applied on energy storage for recent years [1-4]. Zeolitic imidazolate framework 67 (ZIF67) consisted of cobalt ion center and 2-methylimidazole ligand is one of the potential electroactive materials for supercapacitors (SC) [5-7]. However, the intrinsic nature of ZIF67 is not highly capacitive for storing charges even if ZIF67 possesses high surface area for carrying out large amounts of electrochemical reactions. Numerous ex-situ methods were applied on modifying ZIF67 with high redox activity and electrical conductivity. Zhang and co-workers prepared ZIF-derived carbon using co-carbonization technique and obtained a specific capacitance (C_F) of 228 F/g at 0.1 A/g [8]. Hu et al. assembled SC using ZIF-67@amorphous ZIF electrode and capacity retention of 100% after 2000 cycles was obtained [9]. Zhang et al. synthesized

Corresponding author at: Department of Chemical Engineering and Biotechnology, National Taipei University of Technology, Taipei, Taiwan.

The authors are equally contributed

E-mail address: lylin@ntut.edu.tw (L-Y. Lin)

Pin-Yan Lee^a Lu-Yin Lin^{a,b,*,1}

^a Department of Chemical Engineering and Biotechnology, National Taipei University of Technology, Taipei, Taiwan

b Research Center of Energy Conservation for New Generation of Residential, Commercial, and Industrial Sectors, Taipei, Taiwan

共同作者數 (W3)□無(x1) □1位通訊作者 (x1)□2位(含)以上通 訊作者(x0.8) □有 多位作者 Egual Contribution (x0.8)

* Corresponding author at: Department of Chemical Engineering Biotechnology, National Taipei University of Technology, Taipei, Taiwan.

F-mail address: \lvlin@ntut.edu.tw (L-Y_Lin).

The authors are equally contributed.

0925-8388/© 2021 Elsevier B.V. All rights reserved

查詢W3方式

注意事項:

- 1. 國際學者的定義:**除台灣以外**皆是外國,且單位須為<mark>學術機構</mark> (學校、研究機構)。
- 2. 需檢附論文第一頁為佐證資料。
 - (二)作者排序(W2):作者排序與相對應的權重。

作者排序	第一作者	通訊作者	第二作者	第三作者	第四作者	第五作者 以上
權重 2 (W2)	1	1	0.8	0.6	0.4	0.2

(三)共同作者數(W3):

- 1. 若為通訊作者,且該篇文章有兩位以上通訊作者,則該篇須乘以0.8,惟如與國際學者合 著者,該國際學者不受此限。
- 2. 如申請者同屬該篇文章多位 Equal Contribution 之一,則該篇應乘以0.8。

通訊作者數	1位通訊作者	2位(含)以上通訊作者 (若其他通訊作者皆為國際 學者則不需 x0.8)	<u>有多位</u> Equal Contribution
權重3(W3)	1	0.8	0.8


情境模擬	w2	w3
為第一作者	1	1
為通訊作者,只有一位	1	1
為通訊作者,且兩位以上 (都是國內學者)	1	0.8
為通訊作者,且兩位以上 (除了申請人以外都是國外學者)	1	1
第二作者後,且不是通訊作者	對應 點數	1
相同貢獻之第一作者	1	0.8
相同貢獻之通訊作者	1	0.8

查詢W4方式-企業

依ppt第30.31頁方式下載論文檔案,作者下方之區域,可以看到企業

以莊賀喬教授之論文為例:

本篇文章有企業,對應法規應**x1.1**



Contents lists available at ScienceDirect

Food Chemistry

journal homepage: www.elsevier.com/locate/foodchem

3D-flower-like porous neodymium molybdate nanostructure for trace level detection of organophosphorus pesticide in food samples

Muthusankar Ganesan^{a,c}, Ramadhass Keerthika Devi^b, Ai-Ho Liao^{d,e}, Kuo-Yu Lee^t, Gopu Gopalakrishnan^c, Ho-Chiao Chuang^{a,*}

額外加權 (W4)

- □ 血(x1)
- □企業 (x1.1)
- $\sqcup SDG(x1.1)$
- \square SSCI (x1.5)
- □企業、SDG (x1.2)
- □企業、SSCI (x1.6)
- \square SDG \ SSCI (x1.6)
- □企業、SDG、SSCI (x1.8)

^a Department of Mechanical Engineering, National Taipei University of Technology, Taipei, 10608, Taiwan, ROC

b Department of Chemical Engineering and Biotechnology, College of Engineering, National Taipei University of Technology, Taipei 106, Taiwan, ROC

^c Department of Industrial Chemistry, Alagappa University, Karaikudi 630003, Tamil Nadu, India

^d Graduate Institute of Biomedical Engineering, National Taiwan University of Science and Technology, Taipei, Taiwan

^e Department of Biomedical Engineering. National Defense Medical Center, Taipei, Taiwan

^f SV Probe Technology Taiwan Co., Ltd. Zhubei, Taiwan

查詢W4方式-企業


企業通常為crop、Ltd、醫院,若非前述情況,可於Scival上查詢是否屬企業

Step1:登入Scival,點選左列【房子圖案】,輸入欲查詢企業(以工研院Industrial Technology

Research Institute為例)後,點選欲查詢企業

Step2:點選【More details on this Institution】,即顯示出欲查詢企業之類型

*工研院查詢結果為政府機構,故不能勾選企業

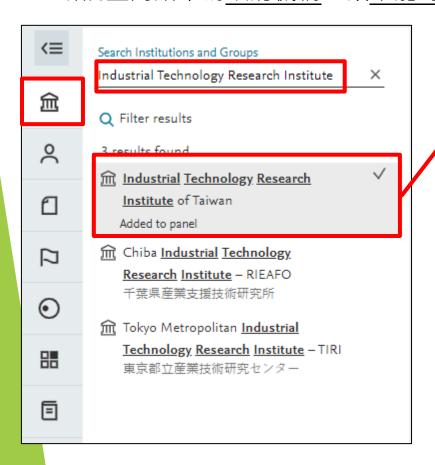



查詢W4方式-SDG(方法一)

化學品和 CAS 登記編號

was significantly higher for large-sized MBs than for smaller MBs. In vitro Franz diffusion experiments showed that the combination of dual-frequency US and large MB size delivered the most IGF-1 $(24.3\pm0.47 \text{ ng/cm}^2)$ to the receptor side at the second hour of treatment. In an in vivo

Step1:依ppt第18~21頁方式查詢論文,帶入論文資料畫面後,點選左下方標籤【永續發展目標2023】

Step2:頁面將自動跳轉至此,將隱藏欄位點出即可看見論文所屬之SDG類別

Step3:確定有SDG後,即可勾選對應欄位,並請檢附查詢畫面當作佐證資料



續下頁


查詢W4方式-SDG(方法二)

Step1:登錄至SciVal,輸入老師名字後,點選【View list of publications】

Step2:篩選所欲查詢教師之機構、年份區間與文獻類型後,點選【Apply filter】

(本範例篩選條件為: 北科大、2022、Article or Review)

Step3:等Apply filter按鈕反灰後,點選【Export spreadsheet】

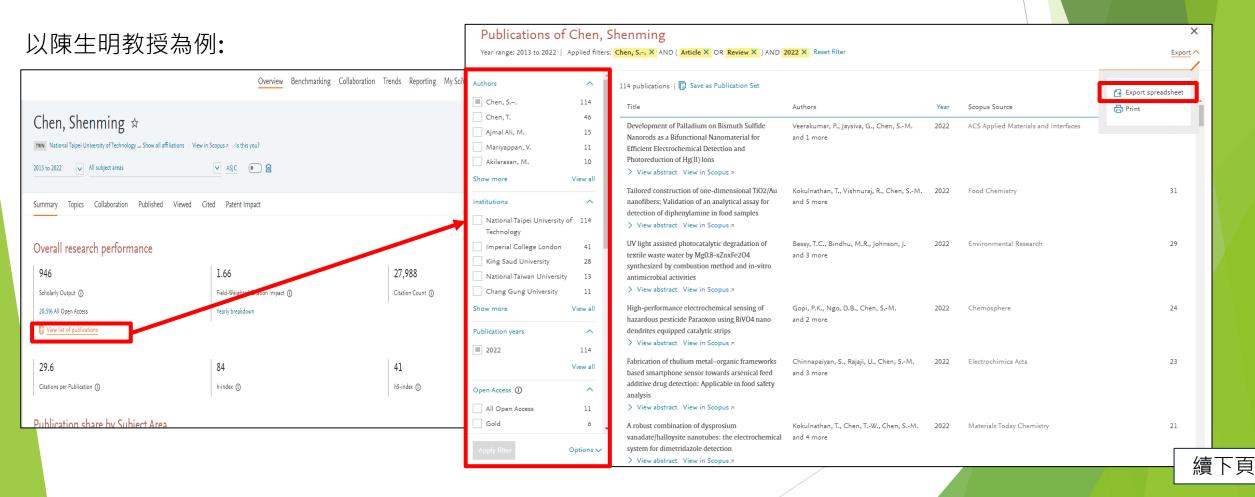

查詢W4方式-SDG(方法二)

Step4:勾選欲匯出之項目再點選【Export CSV】或【Export XLSX】,即可下載檔案

Select the fields you want to inclu-		cations. Last selected options are remem	nbered.		* in publication year
Publication basics Title Authors Year Full date Scopus Source title DOI Publication type Open Access Institutions Number of Institutions Language	Publication details Reference Abstract EID (Scopus ID) PubMed ID Sustainable Development Goals (2023) All Science Journal Classification (ASJC) Code Field name Quacquarelli Symonds (QS) Code Field name Times Higher Education (THE) Code Field name ANZSRC FoR (2020) Code Field name	Author/Affiliations Scopus Affiliation IDs Scopus Affiliation names Number of Authors Scopus Author IDs Scopus Author ID First Author Scopus Author ID Last Author Scopus Author ID Corresponding Author Scopus Author ID Single Author Country/Region Empty Region Empty Rempty Region Empty Region Empty Region Empty Region Empty	•	Scopus Source related Volume Issue Pages Article number ISSN Source ID Source type CiteScore* CiteScore percentile* SNIP* SNIP percentile* SJR* SJR percentile*	Topic Cluster name Topic Cluster number Topic name Topic number Topic Cluster Prominence Percentile Topic Prominence Percentile
					Export CSV 🔁 Export XLSX 🔁

查詢W4方式-SDG(方法二)

Step5:匯出的表單即會列出被收錄SDG之論文,確定有SDG後,即可勾選對應欄位,並請檢附匯出表單當

作佐證資料

作在超真科 Tribal Tr					
Data set Publications of Chen, Shenming			, ,		
Year range 2013 to 2022					
Subject cla ASJC					
Filtered by not filtered					
Types of p All publication types				空石 かし ムー お旅	
Self-citatic -				額外加權	
				(W4)	
Data sourci Scopus				()	
Date last u 1 November 2023					
Date expor 8 November 2023				_	
10 publications match the selected filter options:				_	
Authors Chen, Shenming -m AND Akilarasan, Muthumariappan				□無(x1)	
Publication 2022				□企業 (x1.1)	
Publication (Review OR Article)					
1 ablication (Neview Oil Macie)				\square SDG (x1.1)	
				⊔SSCI (x1.5)	
Title Authors Year Scopus Source title	DOI	Publication typ	Sustainable Development Goals (2023)	□企業、SDG (x1.2)	
Tailored ar Keerthika I 2022 Food Chemistry	10.1016/j.foodchem.2022.133791	Article	-	□企業、SSCI (x1.6)	
In-situ con Nataraj, N. 2022 Chemical Engineering Journal	10.1016/j.cej.2022.137025	Article	-	□SDG \ SSCI (x1.6)	
Se substitu Nataraj, N. 2022 Chemosphere	10.1016/j.chemosphere.2022.134765	Article	SDG 3	□企業、SDG、SSCI	
Rational sy Akilarasan 2022 Bioelectrochemistry	10.1016/j.bioelechem.2022.108145	Article	-		
Electroche Yamuna, A 2022 Journal of Electroanalytical Chemistry	10.1016/j.jelechem.2021.115978	Article	-	(x1.8)	
Fabrication Sundaresar 2022 Micromachines	10.3390/mi13060876	Article	-		
One-pot sy Babulal, S. 2022 Materials Today Chemistry	10.1016/j.mtchem.2022.101132	Article	SDG 3	_	
Rationally Tamilalaga 2022 Colloids and Surfaces A: Physicochemical and Engineering Aspects	10.1016/j.colsurfa,2022,129941	Article	-		
Synthesis c Maheshwa: 2022 Bioelectrochemistry	10.1016/j.bioelechem.2022.108166	Article	-		
In-situ syn Akilarasan 2022 Process Safety and Environmental Protection	10.1016/j.psep.2022.07.011	Article	-		
				續下頁	
© 2023 Elsevier B.V. All rights reserved. SciVal, RELX Group and the RE symbol are trade marks of RELX Intellectual Properties SA, used under license.					

查詢W4方式-SSCI (方法一)

Step1:依ppt第18~21頁方式查詢論文,帶入論文資料畫面後,點選【全文選項】

Step2:顯示出下拉選單後,點選【SCIE】,直接帶出Wos查詢畫面

Step3:確定有SSCI後,即可勾選對應欄位,並請檢附查詢畫面當作佐證資料



額外加權


(W4)

查詢W4方式-SSCI (方法二)

Step1:依ppt第18~21頁方式查詢論文,帶入論文資料畫面後,點選期刊名稱,視窗右邊即顯示出來源出版物詳情預覽欄位,點選【瀏覽完整的來源出版物詳情】

Step2:點選【SCIE】,直接帶出Wos查詢畫面

Step3:確定有SSCI後,即可勾選對應欄位,並請檢附查詢畫面當作佐證資料

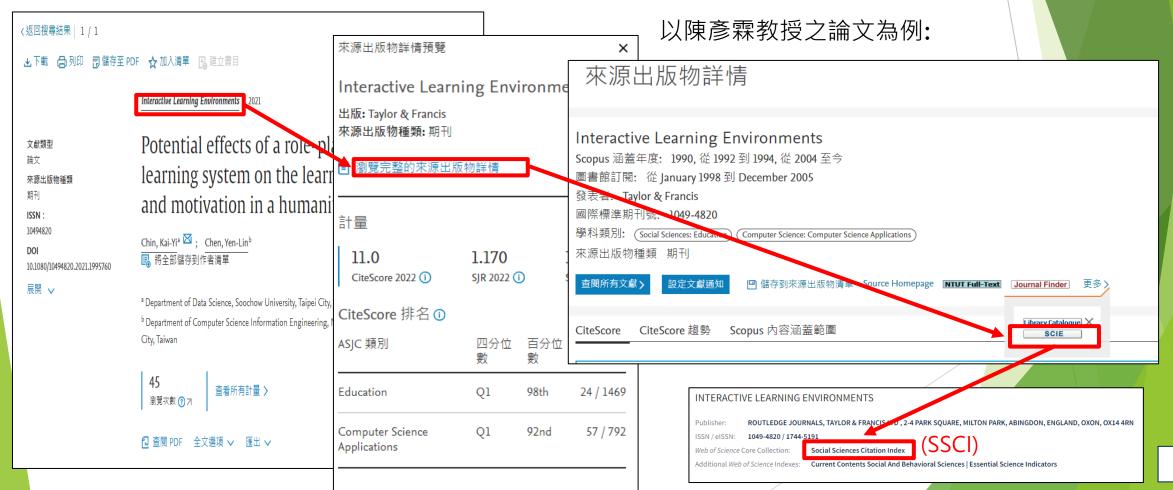

查詢W4方式-SSCI (方法三)

Step1:依ppt第18~21頁方式查詢論文,帶入論文資料畫面後,複製期刊名稱

Step2:至Wos將期刊名稱貼上後,點選【搜尋】,直接帶出查詢畫面

Step3:確定有SSCI後,即可勾選對應欄位,並請檢附查詢畫面當作佐證資料



查詢W4方式

注意事項:

- 1. 企業的定義: crop、Ltd、醫院,或Scival上認列之企業。
- 2. 需檢附論文第一頁為佐證資料,勾選SDG或SSCI者,請檢附查詢畫面為佐證資料。

(四)額外加權(W4):若該篇文章與下列合著之加權相對應權重如下所示,有多項加權者請選擇相對應之選項。

額外加權	無	企業	SDG	SSCI
權重4(W4)	1	1.1	1.1	1.5

註一:符合多項加權時,請依表格填寫。

額外加權 (W4)

- □無(x1)
- □企業 (x1.1)
- \square SDG (x1.1)
- \square SSCI (x1.5)
- □企業、SDG (x1.2)
- □企業、SSCI (x1.6)
- \square SDG \ SSCI (x1.6)
- □企業、SDG、SSCI (x1.8)

查詢W5方式

依ppt第30.31頁方式下載論文檔案,作者下方之區域,可以看到國際學者以陳生明教授之論文為例:

本篇文章與3位國際學者合著,對應法規應x1.2

Disposable cerium oxide/graphene nanosheets based sensor for monitoring acebutolol in environmental samples and bio-fluids

Subash Vetri Selvi ^{a,1}, Nandini Nataraj ^{a,1}, Tse-Wei Chen ^{a,b,c}, Shen-Ming Chen ^{a,*}, Prakash Balu ^e, Xiaoheng Liu ^{d,*}

國際合著學術 機構國家數 (W5)

□無(x1)

□1-2個國家 (x1.1)

□3個國家以上

(x1.2)

注意事項:

國際學者的定義:除台灣以外皆是外國,且單位須為學術機構(學校、研究機構)。

^a Electroanalysis and Bioelectrochemistry Lab, Department of Chemical Engineering and Biotechnology, National Taipei University of Technology, No. 1, Section 3, Chung-Hsiao East Road, Taipei 106, Taiwan, ROC

b Research and Development Center for Smart Textile Technology, National Taipei University of Technology, No.1, Section 3, Chung-Hsiao East Road, Taipei 106, Taiwan

^c Department of Materials, <u>Imperial College London</u>, London SW7 2AZ United Kingdom

d Key Laboratory of Education Ministry for Soft Chemistry and Functional Materials, Nanjing University of Science and Technology, Nanjing 210094, China


e Department of Biotechnology, School of Life Science, Vels Institute of Science, Technology and Advanced Studies, Chennai, Tamilnadu India

查詢W5方式-國際學者

國際學者通常為<u>University、Academic、College、Laboratory</u>,若非前述情況,可於

Scival上查詢是否屬研究機構,查詢方式同前

*私人公司之研究室不屬於研究機構

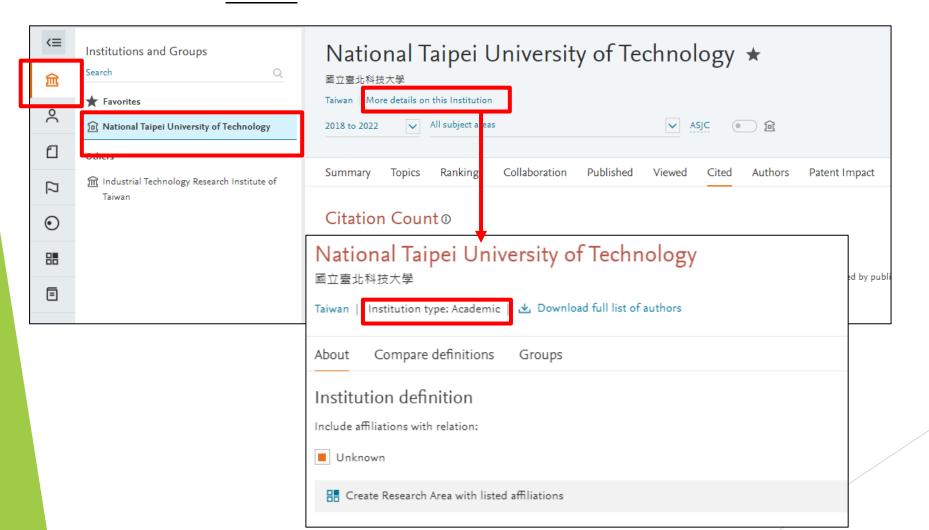

56

【共通】研究彈薪申請表注意事項

溫馨小提醒

_			
1	請 <u>勿</u> 使用舊版、未更新為現行查詢結果或非紙本出版年度之佐證	9	論文未被Scopus或WOS收錄,或論文發表當年度期刊未被Scopus或WOS 收錄,將不予採計點數
2	請確認論文機構是否被列為China、PROC等不符合教育部列名原則之情事,如有則不予計點	10	使用之論文應符合申請區間 (<mark>請以紙本出刊為主</mark>) 例:112年度申請時可用論文為2018~2022,故2023發表之論文則不可 納入計點
3	學術論著績效僅限 Original article 與 Review article 兩類期刊論文點數,研討會論文及其他類型文章均不予計點	11	請使用正確/最新版之表格·並勿更動研發處查詢之本校FWCI與h5值
4	Ranking值請計算至小數點後2位,勿四捨五入	12	多年期國科會計畫應分年度計算經費與點數,並請提供教評系統列印文 件作為佐證
5	同篇文章有2位以上通訊作者·則該篇須乘上0.8 如與國際學者合著者·則該國際學者不受此限(不需乘0.8)	13	國科會計畫點數依學院慣例審查,不須送至研發處蓋章
6	如有多位(含2位)以上國內通訊作者,第一位通訊作者亦應乘0.8	14	國科會產學合作案應列入產學,不計入專題計畫點數
7	企業的定義:crop、Ltd、醫院 國際學者的定義:除台灣以外皆是外國,且單位須為學術機構(學校 研究機構)	15	產學合作與技轉點數應先送產學處審核確認,檢核後即可送交系辦彙整, 不須先送至研發處
8	同篇文章有2位以上本校教師為共同作者·請檢附其他教師同意書	16	A類申請項目可複選,惟額外項目不得單獨勾選且皆須檢附佐證