

各類獎助點數查詢教學

研發處113.3.15修正

國立臺北科技大學傑出論文績效說明表

B

申請人姓名(中/英文):

系所/職稱:

員工編號:

以莊賀喬教授之論文為例:
(接續下頁)

每篇論文僅能有一位作者提出申請，
若有2位以上本校教師為**共同作者**，請
檢附**其他教師同意書**

Journal Papers 請依序填寫：姓名、著作名稱、 期刊名稱、卷數、頁數、發表年 份(SCI/SSCI, Impact Factor, Scopus CiteScore Rank, 領域別) 並以*註 記該篇所有之通訊作者，檢附每 篇論文首頁與以 Scopus 資料庫為 主之證明文件。	期刊排名 R (W1)	作者排序 (W2)	共同作者數 (W3)	額外加權 (W4)	國際合著學術 機構國家數 (W5)	點 數 (=W1×W2 ×W3×W4×W5)
範 例 AAA, <u>BBB*</u> , CCC, An entry-exit path planner for an autonomous tractor in a paddy field, Computers and Electronics in Agriculture, Vol.191, Dec, 2021. (SCI, IF=6.757; CiteScore Rank: 1/94=0.0106=1.06%, Horticulture)	<input type="checkbox"/> Nature、Science 及 Cell (150點) <input type="checkbox"/> R≤1% (40點) <input checked="" type="checkbox"/> 1%<R≤5% (25點) <input type="checkbox"/> 5%<R≤10% (15 點) <input type="checkbox"/> 10%<R≤25% (10 點) <input type="checkbox"/> 25%<R≤40% (5點) <input type="checkbox"/> R>40% (2點)	<input type="checkbox"/> 第一作者(x1) <input checked="" type="checkbox"/> 通訊作者(x1) <input type="checkbox"/> 第二作者(x0.8) <input type="checkbox"/> 第三作者(x0.6) <input type="checkbox"/> 第四作者(x0.4) <input type="checkbox"/> 第五作者以上 (x0.2)	<input type="checkbox"/> 無(x1) <input checked="" type="checkbox"/> 1位通訊作者 (x1) <input type="checkbox"/> 2位(含)以上通 訊作者(x0.8) <input type="checkbox"/> 有多位作者 Equal Contribution (x0.8)	<input checked="" type="checkbox"/> 無 (x1) <input type="checkbox"/> 企業 (x1.1) <input type="checkbox"/> SDG (x1.1) <input type="checkbox"/> SSCI (x1.5) <input type="checkbox"/> 企業、SDG (x1.2) <input type="checkbox"/> 企業、SSCI (x1.6) <input type="checkbox"/> SDG、SSCI (x1.6) <input type="checkbox"/> 企業、SDG、SSCI (x1.8)	<input checked="" type="checkbox"/> 無 (x1) <input type="checkbox"/> 1-2個國家 (x1.1) <input type="checkbox"/> 3個國家以上 (x1.2)	25×1×1×1×1 =25
Shobana Sebastin Mary Manickaraj, Sabarison Pandiyarajan, Ai-Ho Liao, Atchaya Ramachandran, Sheng-Tung Huang, Priyadharshini Natarajan, <u>Ho-Chiao Chuang*</u> , “Sansevieria trifasciata biomass-derived activated carbon by supercritical-CO ₂ route: electrochemical detection towards carcinogenic organic pollutant and energy storage application” Electrochimica Acta, Vol.424, pp 140672, August 2022. (SCI, Impact Factor=7.3; CiteScore Rank: 19/280=6.78%, General Chemical Engineering)	<input type="checkbox"/> Nature、Science 及 Cell (150點) <input type="checkbox"/> R≤1% (40點) <input type="checkbox"/> 1%<R≤5% (25點) <input checked="" type="checkbox"/> 5%<R≤10% (15 點) <input type="checkbox"/> 10%<R≤25% (10 點) <input type="checkbox"/> 25%<R≤40% (5點) <input type="checkbox"/> R>40% (2點)	<input checked="" type="checkbox"/> 第一作者(x1) <input type="checkbox"/> 通訊作者(x1) <input type="checkbox"/> 第二作者(x0.8) <input type="checkbox"/> 第三作者(x0.6) <input type="checkbox"/> 第四作者(x0.4) <input type="checkbox"/> 第五作者以上 (x0.2)	<input type="checkbox"/> 無(x1) <input checked="" type="checkbox"/> 1位通訊作者 (x1) <input type="checkbox"/> 2位(含)以上通 訊作者(x0.8) <input type="checkbox"/> 有多位作者 Equal Contribution (x0.8)	<input type="checkbox"/> 無(x1) <input checked="" type="checkbox"/> 企業 (x1.1) <input type="checkbox"/> SDG (x1.1) <input type="checkbox"/> SSCI (x1.5) <input type="checkbox"/> 企業、SDG (x1.2) <input type="checkbox"/> 企業、SSCI (x1.6) <input type="checkbox"/> SDG、SSCI (x1.6) <input type="checkbox"/> 企業、SDG、SSCI (x1.8) 2	<input type="checkbox"/> 無 (x1) <input checked="" type="checkbox"/> 1-2個國家 (x1.1) <input type="checkbox"/> 3個國家以上 (x1.2)	15 * 1 * 1*1.1*1.1=18.15

續下頁

查詢方式: (以莊賀喬教授之論文為例)

Step1: 登入Scopus資料庫

(<https://www.scopus.com/search/form.uri?display=authorLookup#basic>)，輸入老師名字後，點選【搜尋】

開始探索
探索最可靠、最相關、最即時的研究，一站式處理。

文獻 作者 搜尋研究人員 (Researcher Discovery) 機構 Scopus AI Alpha 搜尋提示

Search authors using: ☒ 作者姓名 ☐ ORCID ☐ 關鍵字 新增

輸入姓氏 *
Chuang

輸入名字
Ho-Chiao

+ 新增機構

搜尋

Step2: 確認所屬機構為本校後，點選【老師名字】

☐ 僅顯示完全相符
優化搜尋結果
限制範圍 排除

機構

- ☐ National Taipei University of Technology (1) >
- ☐ National Tsing Hua University (1) >
- ☐ University of Colorado Boulder (1) >

城市

排序方式: 文獻數量 (高至低)

☐ 全部 顯示文獻 Citation overview 請求合併作者

	作者	文獻	h-index	機構	城市	國家/地區
<input type="checkbox"/> 1	Chuang, Hochiao Chiao Rick Chuang, Ho Chiao Chuang, Chiao Ho Chuang, H. C.	103	14	National Taipei University of Technology	Taipei	Taiwan

查看最近的文獻標題

每頁顯示: 20 個搜尋結果 / 每頁 1 頁首

3

續下頁

Step3:點入之後滑至最下方，將顯示調至【200結果】



Article

3D-flower-like porous neodymium molybdate nanostructure for trace level detection of organophosphorus pesticide in food samples

Ganesan, M., Keerthika Devi, R., Liao, A.-H., ...Gopalakrishnan, G., Chuang, H.-C.

Food Chemistry, 2022, 396, 133722

[查看摘要](#) [NTUT Full-Text](#) [Full Text](#) [相關文獻](#)

< 上一頁

1 2 3 4 5 ... 11 下一頁 >

顯示 10 結果

10 結果

20 結果

50 結果

100 結果

200 結果

opus

語言

客戶服務

Step4:利用CTRL+F去快速搜尋本篇論文

Chuang, Hochiao Chiao Rick

Sansevieria trifasciata bioma 1/1

Article

Combining the wavelet transform with a phase-lead compensator to a respiratory motion compensation system with an ultrasound tracking technique in radiation therapy

Kuo, C.-C., Guo, M.-L., Liao, A.-H., ...Ting, L.-L., Chuang, H.-C.

Biomedical Signal Processing and Control, 2022, 78, 103892

查看摘要 [NTUT Full-Text](#) [Full Text](#) 相關文獻

0
引用次數

Article

Malic acid pathway of constructing high-performance Ni anticorrosive coatings using supercritical-CO₂ electrodeposition

Manickaraj, S.S.M., Pandiyarajan, S., Liao, A.-H., ...Lee, K.-Y., Chuang, H.-C.

Materials Science In Semiconductor Processing, 2022, 148, 106780

查看摘要 [NTUT Full-Text](#) [Full Text](#) 相關文獻

5
引用次數

Article

Sansevieria trifasciata biomass-derived activated carbon by supercritical-CO₂ route: Electrochemical detection towards carcinogenic organic pollutant and energy storage application

Manickaraj, S.S.M., Pandiyarajan, S., Liao, A.-H., ...Natarajan, P., Chuang, H.-C.

Electrochimica Acta, 2022, 424, 140672

查看摘要 [NTUT Full-Text](#) [Full Text](#) 相關文獻

6
引用次數

Step5:點選反橘色之論文題目，即帶入論文資料畫面，要確認論文發布時間在本次申請之規定時間內

Electrochimica Acta • 卷 424 • 20 August 2022 • 論文號碼 140672

文獻類型
論文
來源出版物種類
期刊
ISSN :
00134686
DOI
10.1016/j.electacta.2022.140672
展開

Sansevieria trifasciata biomass-derived activated carbon by supercritical-CO₂ route: Electrochemical detection towards carcinogenic organic pollutant and energy storage application

Manickaraj, Shobana Sebastin Mary^{a, b}; Pandiyarajan, Sabarison^{a, b}; Liao, Ai-Ho^{c, d}; Ramachandran, Atchaya^e; Huang, Sheng-Tung^a; Natarajan, Priyadharshini^f; Chuang, Ho-Chiao^b ✉

將全部儲存到作者清單

^a Department of Chemical Engineering and Biotechnology, National Taipei University of Technology, Taipei, 106344, Taiwan
^b Department of Mechanical Engineering, National Taipei University of Technology, Taipei, 106344, Taiwan
^c Graduate Institute of Biomedical Engineering, National Taiwan University of Science and Technology, Taipei, 106335, Taiwan
^d Department of Biomedical Engineering, National Defense Medical Center, Taipei, 114201, Taiwan
顯示其他的機構

6 78th percentile
在 Scopus 中的引用次數 : in Scopus

1.26
領域權重引用影響指數 (FWCI)

14
瀏覽次數

查看所有計量

查閱 PDF 全文選項 匯出

摘要

作者關鍵字

Reaxys 化學資料庫資訊

摘要
Activated carbon (AC) has been widely used for electrochemical applications, such as electrochemical sensors, energy storage applications, etc., due to its fine porous structure, volumetric capacitance, and chemical stability. Supercritical-CO₂ (SC-CO₂) has a fascinating advantage in material science due to its microbubble cavitation, high diffusivity, and high

查詢W1~W5之方式

Journal Papers 請依序填寫：姓名、著作名稱、期刊名稱、卷數、頁數、發表年份(SCI/SSCI,Impact Factor,Scopus CiteScore Rank,領域別) 並以*註記該篇所有之通訊作者，檢附每篇論文首頁與以 Scopus 資料庫為主之證明文件。		期刊排名 R (W1)	作者排序 (W2)	共同作者數 (W3)	額外加權 (W4)	國際合著學術機構國家數 (W5)	點數 (=W1×W2×W3×W4×W5)
1		<input type="checkbox"/> Nature、Science 及 Cell (150點) <input type="checkbox"/> $R \leq 1\%$ (40點) <input type="checkbox"/> $1\% < R \leq 5\%$ (25點) <input type="checkbox"/> $5\% < R \leq 10\%$ (15點) <input type="checkbox"/> $10\% < R \leq 25\%$ (10點) <input type="checkbox"/> $25\% < R \leq 40\%$ (5點) <input type="checkbox"/> $R > 40\%$ (2點)	<input type="checkbox"/> 第一作者(x1) <input type="checkbox"/> 通訊作者(x1) <input type="checkbox"/> 第二作者(x0.8) <input type="checkbox"/> 第三作者(x0.6) <input type="checkbox"/> 第四作者(x0.4) <input type="checkbox"/> 第五作者以上(x0.2)	<input type="checkbox"/> 無(x1) <input type="checkbox"/> 1位通訊作者(x1) <input type="checkbox"/> 2位(含)以上通訊作者(x0.8) <input type="checkbox"/> 有多位作者 Equal Contribution (x0.8)	<input type="checkbox"/> 無(x1) <input type="checkbox"/> 企業 (x1.1) <input type="checkbox"/> SDG (x1.1) <input type="checkbox"/> SSCI (x1.5) <input type="checkbox"/> 企業、SDG (x1.2) <input type="checkbox"/> 企業、SSCI (x1.6) <input type="checkbox"/> SDG、SSCI (x1.6) <input type="checkbox"/> 企業、SDG、SSCI (x1.8)	<input type="checkbox"/> 無 (x1) <input type="checkbox"/> 1-2個國家 (x1.1) <input type="checkbox"/> 3個國家以上 (x1.2)	

查詢W1方式-以Scopus查詢

Step1:點選期刊名稱後，視窗右邊即顯示出來源出版物詳情預覽欄位，點選【瀏覽完整的來源出版物詳情】

Electrochimica Acta · 卷 424 · 20 August 2022 · 論文號碼 140672

Sansevieria trifasciata biomass-derived activated carbon by supercritical-CO₂ route: Electrochemical detection towards carcinogenic organic pollutant and energy storage application

Manickaraj, Shobana Sebastin Mary^{a, b}; Pandiyarajan, Sabarison^{a, b}; Liao, Ai-Ho^{c, d}; Ramachandran, Atchaya^e; Huang, Sheng-Tung^a; Natarajan, Priyadharshini^f; Chuang, Ho-Chiao^b ✉

✉ 將全部儲存到作者清單

^a Department of Chemical Engineering and Biotechnology, National Taipei University of Technology, Taipei, 106344, Taiwan
^b Department of Mechanical Engineering, National Taipei University of Technology, Taipei, 106344, Taiwan
^c Graduate Institute of Biomedical Engineering, National Taiwan University of Science and Technology, Taipei, 106335, Taiwan
^d Department of Biomedical Engineering, National Defense Medical Center, Taipei, 114201, Taiwan

顯示其他的機構 ▾

6 78th percentile
在 Scopus 中的引用次數：in Scopus

1.26
領域權重引用影響指數 (FWCI) ⓘ

14
瀏覽次數 ⓘ 7

查看所有計量 >

查閱 PDF 全文選項 ▾ 匯出 ▾

來源出版物詳情預覽 ×

Electrochimica Acta

出版: Elsevier
來源出版物種類: 期刊

📄 瀏覽完整的來源出版物詳情

計量

12.8
CiteScore 2022 ⓘ

1.264
SJR 2022 ⓘ

1.047
SNIP 2022 ⓘ

CiteScore 排名 ⓘ

ASJC 類別	四分位數	百分位數	排名
General Chemical Engineering	Q1	93rd	19 / 272
Electrochemistry	Q1	87th	7 / 54

8

查詢W1方式-以Scopus查詢
Step2:選擇論文發表時的年份(如2022年發表，則應選擇2022年之CiteScore)

來源出版物詳情

Electrochimica Acta

Scopus 涵蓋年度: 從 1959 至今

圖書館訂閱: 從 January 1995

發表者: Elsevier

國際標準期刊號: 0013-4686

學科類別: Chemical Engineering: General Chemical Engineering Chemistry: Electrochemistry

來源出版物種類 期刊

回讀 > 比較來源出版物 >

CiteScore 2022

12.8

①

SJR 2022

1.264

①

SNIP 2022

1.047

①

查閱所有文獻 > 設定文獻通知 儲存到來源出版物清單 Source Homepage NTUT Full-Text Journal Finder 更多 >

CiteScore CiteScore 趨勢 Scopus 內容涵蓋範圍

CiteScore 的改良計算方法

CiteScore 2022 計算在 2019-2022發表的論文、回顧文獻、會議論文、專書論文、和數據論文等等在 2019-2022 所收到的引用總數，除以發表於2019-2022的出版物總數。 瞭解更多 >

CiteScore 2022

12.8

計算 05 May, 2023

CiteScore 排名

類別

Chemical Engineering

個引用次數

91 篇文獻

排名

百分位數

CiteScore 追蹤2023 ①

10.3

迄今 62,619 個引用次數

迄今 6,087 篇文獻

最後一次更新:05 September, 2023 • 每個月更新

9

續下頁

查詢W1方式-以Scopus查詢

Step3:取百分位數最高之排名後，將期刊排名轉換成對應點數， $19/272=6.9\%$ ，對應法規點數為15，並請檢附查詢畫面當作佐證資料



期刊排名 R (W1)
<input type="checkbox"/> Nature、Science 及 Cell (150點)
<input type="checkbox"/> $R \leq 1\%$ (40點)
<input type="checkbox"/> $1\% < R \leq 5\%$ (25點)
<input type="checkbox"/> $5\% < R \leq 10\%$ (15點)
<input type="checkbox"/> $10\% < R \leq 25\%$ (10點)
<input type="checkbox"/> $25\% < R \leq 40\%$ (5點)
<input type="checkbox"/> $R > 40\%$ (2點)

查詢W1方式-以WOS查詢

Step1:輸入論文題目後，點選【Search】，即帶入論文資料畫面

DOCUMENTS

RESEARCHERS

Search in: Web of Science Core Collection ▾ Editions: All ▾

DOCUMENTS

CITED REFERENCES

All Fields ▾

Example: liver disease india singh
Sansevieria trifasciata biomass-derived activated carbon by supercritical-CO2 route: electr ✕

+ Add row

+ Add date range

Advanced Search

✕ Clear

Search

☐ 0/1

Add To Marked List

Export ▾

Sort by: Relevance ▾

< 1 of 1 >

☐ 1

Sansevieria trifasciata biomass-derived activated carbon by supercritical-CO2 route: Electrochemical detection towards carcinogenic organic pollutant and energy storage application

Manickaraj, SSM; Pandiyarajan, S; (...); Chuang, HC

Aug 20 2022 | Jun 2022 (Early Access) | ELECTROCHIMICA ACTA 424

Activated carbon (AC) has been widely used for electrochemical applications, such as electrochemical sensors, energy storage applications, etc., due to its fine porous structure, volumetric capacitance, and chemical stability. Supercritical-CO2 (SC-CO2) has a fascinating advantage in material science due to its microbubble cavitation, high diffusivity, and high permeability. In the shed of ligh ... Show more

Full Text at Publisher ...

6 Citations

62 References

Related records ?

查詢W1方式-以WOS查詢

Step2:點選期刊名稱後，視窗右邊即顯示出Journal information欄位，點選【Learn more】

Full text at publisher

ExportAdd

Sansevieria trifasciata biomass-derived activated carbon by supercritical-CO2 route: Electrochemical detection towards carcinogenic organic pollutant and energy storage application

By

Manickaraj, SSM (Manickaraj, Shobana Sebastin Mary) [1], [2]; Pandiyarajan, S (Pandiyarajan, Sabarison) [1], [2]; Liao, AH (Liao, Ai-Ho) [3], [4]; Ramachandran, A (Ramachandran, Atchaya) [5]; Huang, ST (Huang, Sheng-Tung) [1]; Natarajan, P (Natarajan, Priyadharshini) [6]; Chuang, HC (Chuang, Ho-Chiao) [2]

View Web of Science ResearcherID and ORCID (provided by Clarivate)

Source

ELECTROCHIMICA ACTA

Volume: 424
DOI: 10.1016/j.electacta.2022.140672

Article Number

140672

Published

AUG 20 2022

Early Access

JUN 2022

Indexed

2022-07-10

Document Type

Article

Abstract

Activated carbon (AC) has been widely used for electrochemical applications, such as electrochemical sensors, energy storage applications, etc., due to its fine porous structure, volumetric capacitance, and chemical stability. Supercritical-CO2 (SC-CO2) has a

Journal information

X

ELECTROCHIMICA ACTA

Publisher name: PERGAMON-ELSEVIER SCIENCE LTD

Journal Impact Factor™

6.66

2022Five Year

JCR Category	Category Rank	Category Quartile
ELECTROCHEMISTRY in SCIE edition	8/30	Q2

Source: Journal Citation Reports 2022

Learn more

Journal Citation Indicator™

1.121.18

20222021

JCI Category	Category Rank	Category Quartile
ELECTROCHEMISTRY in SCIE edition	7/42	Q1

The Journal Citation Indicator is a measure of the average Category Normalized Citation Impact (CNCI) of citable items (articles and reviews) published by a journal over a recent three year period. It is used to help you evaluate journals based on other metrics besides the Journal Impact Factor (JIF).

查詢W1方式-以WOS查詢

Step3:選擇論文發表時的年份(如2022年發表，則應選擇2022年之JCR YEAR)

Journal Citation Reports™
Journals Categories Publishers Countries/Regions
Home > Journal profile
JCR YEAR
2022
ELECTROCHIMICA ACTA
ISSN
0013-4686
EISSN
1873-3859
JCR ABBREVIATION
ELECTROCHIM ACTA
ISO ABBREVIATION
Electrochim. Acta

Journal information
EDITION
Science Citation Index Expanded (SCIE)
CATEGORY
ELECTROCHEMISTRY - SCIE
LANGUAGES
Multi-Language
REGION
ENGLAND
1ST ELECTRONIC JCR YEAR
1997
Publisher information
PUBLISHER
PERGAMON-ELSEVIER SCIENCE LTD
ADDRESS
THE BOULEVARD, LANGFORD LANE, KIDLINGTON, OXFORD OX5 1GB, ENGLAND
PUBLICATION FREQUENCY
28 issues/year

Step4:滑至中間查詢排名，取百分位數最高之排名後，將期刊排名轉換成對應點數， $7/42=16.6\%$ ，對應法規點數為10，並請檢附查詢畫面當作佐證資料

Rank by Journal Impact Factor
Journals within a category are sorted in descending order by Journal Impact Factor (JIF) resulting in the Category Ranking below. A separate rank is shown for the most recent year. Data for the most recent year is presented at the top of the list, with other years shown in reverse chronological order. Learn more
EDITION
Science Citation Index Expanded (SCIE)
CATEGORY
ELECTROCHEMISTRY
8/30
JCR YEAR JIF RANK JIF QUARTILE JIF PERCENTILE
2022 8/30 Q2 75.0
2021 7/30 Q1 78.33
2020 8/29 Q2 74.14
2019 5/27 Q1 83.33
2018 5/26 Q1 82.69

Rank by Journal Citation Indicator (JCI)
Journals within a category are sorted in descending order by Journal Citation Indicator (JCI) resulting in the Category Ranking below. A separate rank is shown for the most recent year. Data for the most recent year is presented at the top of the list, with other years shown in reverse chronological order. Learn more
CATEGORY
ELECTROCHEMISTRY
7/42
JCR YEAR JCI RANK JCI QUARTILE JCI PERCENTILE
2022 7/42 Q1 84.52
2021 7/42 Q1 84.52
2020 7/39 Q1 83.33
2019 7/39 Q1 83.33
2018 6/37 Q1 85.14
2017 5/36 Q1 87.50

期刊排名 R (W1)

☐ Nature、Science 及 Cell (150點)

☐ $R \leq 1\%$ (40點)

☐ $1\% < R \leq 5\%$ (25點)

☐ $5\% < R \leq 10\%$ (15點)

☐ $10\% < R \leq 25\%$ (10點)

☐ $25\% < R \leq 40\%$ (5點)

☐ $R > 40\%$ (2點)

查詢W1方式

注意事項:

1. 查詢年度應選擇論文發表時的年份(如2022年發表，則應選擇2022年)。
2. 可自行選擇以Scopus或Wos之查詢結果為佐證資料。
3. 在不四捨五入的情況下依據其所屬區間對應權重數值。

查詢W2方式-以Scopus查詢

依ppt第4~6頁方式查詢出以下畫面，點選【查閱PDF】，再點選【View PDF】即下載論文檔案

1 / 1

下載 列印 儲存至 PDF 儲存到清單 建立書目

Electrochimica Acta • 卷 424 • 20 August 2022 • 論文號碼 140672

文獻類型
論文
來源出版物種類
期刊
ISSN :
00134686
DOI
10.1016/j.electacta.2022.140672
展開

Sansevieria trifasciata biomass-derived activated carbon by supercritical-CO₂ route: Electrochemical detection towards carcinogenic organic pollutant and energy storage application

Manickaraj, Shobana Sebastin Mary^{a, b}; Pandiyarajan, Sabarison^{a, b}; Liao, Ai-Ho^{c, d}; Ramachandran, Atchaya^a; Huang, Sheng-Tung^a; Natarajan, Priyadharshini^f; Chuang, Ho-Chiao^b ✉

✉ 將全部儲存到作者清單

^a Department of Chemical Engineering and Biotechnology, National Taipei University of Technology, Taipei, 106344, Taiwan
^b Department of Mechanical Engineering, National Taipei University of Technology, Taipei, 106344, Taiwan
^c Graduate Institute of Biomedical Engineering, National Taiwan University of Science and Technology, Taipei, 106335, Taiwan
^d Department of Biomedical Engineering, National Defense Medical Center, Taipei, 114201, Taiwan
顯示其他的機構

678th percentile
在 Scopus 中的引用次數: in Scopus

1.26
領域權重引用影響指數 (FWCI)

14
瀏覽次數

查看所有計量

查閱 PDF 全文選項 匯出

View PDF Download full issue

ELSEVIER

Electrochimica Acta
Volume 424, 20 August 2022, 140672

Sansevieria trifasciata biomass-derived activated carbon by supercritical-CO₂ route: Electrochemical detection towards carcinogenic organic pollutant and energy storage application

Shobana Sebastin Mary Manickaraj^{a, b, 1}, Sabarison Pandiyarajan^{a, b, 1}, Ai-Ho Liao^{c, d}, Atchaya Ramachandran^a, Sheng-Tung Huang^a, Priyadharshini Natarajan^f, Ho-Chiao Chuang^b ✉

Show more

+ Add to Mendeley Share Cite

<https://doi.org/10.1016/j.electacta.2022.140672> Get rights and content

續下頁

查詢W2方式-以WOS查詢

依ppt第11頁方式查詢出以下畫面，點選【Full text at publisher】，再點選【View PDF】即下載論文檔案

Full text at publisher

Export x Add

Sansevieria trifasciata biomass-derived activated carbon by supercritical-CO₂ route: Electrochemical detection towards carcinogenic organic pollutant and energy storage application

By Manickaraj, SSM (Manickaraj, Shobana Sebastin Mary) ^{[1], [2]}; Pandiyarajan, S (Pandiyarajan, Sabarison) ^{[1], [2]}; Liao, AH (Liao, Ai-Ho) ^{[3], [4]}; Ramachandran, A (Ramachandran, Atchaya) ^[5]; Huang, ST (Huang, Sheng-Tung) ^[1]; Natarajan, P (Natarajan, Priyadharshini) ^[6]; Chuang, HC (Chuang, Ho-Chiao) ^[2]

View Web of Science ResearcherID and ORCID (provided by Clarivate)

Source ELECTROCHIMICA ACTA

Volume: 424

DOI: 10.1016/j.electacta.2022.140672

Article Number 140672

Published AUG 20 2022

Early Access JUN 2022

Indexed 2022-07-10

Document Type Article



Abstract Activated carbon (AC) has been widely used for electrochemical applications, such as electrochemical sensors, energy storage applications, etc., due to its fine porous structure, volumetric capacitance, and chemical stability. Supercritical-CO₂ (SC-CO₂) has a fascinating advantage in material science due to its microbubble cavitation, high diffusivity, and high permeability. In the shed of light, we developed a high porous Sansevieria trifasciata biomass-derived AC by SC-CO₂/SC-

View PDF Download full issue



ELSEVIER


Electrochimica Acta
Volume 424, 20 August 2022, 140672

Sansevieria trifasciata biomass-derived activated carbon by supercritical-CO₂ route: Electrochemical detection towards carcinogenic organic pollutant and energy storage application

Shobana Sebastin Mary Manickaraj ^{a b 1}, Sabarison Pandiyarajan ^{a b 1}, Ai-Ho Liao ^{c d}, Atchaya Ramachandran ^e, Sheng-Tung Huang ^a, Priyadharshini Natarajan ^f, Ho-Chiao Chuang ^b  

Show more

+ Add to Mendeley  Share  Cite

<https://doi.org/10.1016/j.electacta.2022.140672> 

Get rights and content

以陳彥霖教授之論文為例：
本篇文章陳教授為第一作者，對應法規應x1



Article

An Upper Extremity Rehabilitation System Using Efficient Vision-Based Action Identification Techniques

Yen-Lin Chen ¹, Chin-Hsuan Liu ¹, Chao-Wei Yu ¹, Posen Lee ^{2,*} and Yao-Wen Kuo ¹

¹ Department Computer Science and Information Engineering, National Taipei University of Technology, Taipei 10608, Taiwan; ylchen@csie.ntut.edu.tw (Y.-L.C.); chinhsuanliu@gmail.com (C.-H.L.); david741002@gmail.com (C.-W.Y.); kent21221@gmail.com (Y.-W.K.)
² Department Occupational Therapy, I-Shou University, Kaohsiung 82445, Taiwan
* Correspondence: posenlee@isu.edu.tw; Tel.: +886-7-657-7711 (ext. 7516)

Received: 30 May 2018; Accepted: 10 July 2018; Published: 17 July 2018



Featured Application: This study proposes an upper extremity rehabilitation system using efficient action identification system for home based on color and depth sensor information, and can perform well under complex ambient environments.

Abstract: This study proposes an action identification system for home upper extremity rehabilitation. In the proposed system, we apply an RGB-depth (color-depth) sensor to capture the image sequences of the patient's upper extremity actions to identify its movements. We apply a skin color detection technique to assist with extremity identification and to build up the upper extremity skeleton points. We use the dynamic time warping algorithm to determine the rehabilitation actions. The system presented herein builds up upper extremity skeleton points rapidly. Through the upper extremity of the human skeleton and human skin color information, the upper extremity skeleton points are effectively established by the proposed system, and the rehabilitation actions of patients are identified by a dynamic time warping algorithm. Thus, the proposed system can achieve a high recognition rate of 98% for the defined rehabilitation actions for the various muscles. Moreover, the computational speed of the proposed system can reach 125 frames per second—the processing time per frame is less than 8 ms on a personal computer platform. This computational efficiency allows efficient extensibility for future developments to deal with complex ambient environments and for implementation in embedded and pervasive systems. The major contributions of the study are: (1) the proposed system is not only a physical exercise game, but also a movement training program for specific muscle groups; (2) The hardware of upper extremity rehabilitation system included a personal computer with personal computer and a depth camera. These are economic equipment, so that patients who need this system can set up one set at home; (3) patients can perform rehabilitation actions in sitting position to prevent him/her from falling down during training; (4) the accuracy rate of identifying rehabilitation action is as high as 98%, which is sufficient for distinguishing between correct and wrong action when performing specific action trainings; (5) The proposed upper extremity rehabilitation system is real-time, efficient to vision-based action identification, and low-cost hardware and software, which is affordable for most families.

Keywords: upper extremity identification; color and depth sensors; skeleton points; rehabilitation actions; home rehabilitation; computer vision

Yen-Lin Chen ¹, Chin-Hsuan Liu ¹, Chao-Wei Yu ¹, Posen Lee ^{2,*} and Yao-Wen Kuo ¹

¹ Department Computer Science and Information Engineering, National Taipei University of Technology, Taipei 10608, Taiwan; ylchen@csie.ntut.edu.tw (Y.-L.C.); chinhsuanliu@gmail.com (C.-H.L.); david741002@gmail.com (C.-W.Y.); kent21221@gmail.com (Y.-W.K.)
² Department Occupational Therapy, I-Shou University, Kaohsiung 82445, Taiwan
* Correspondence: posenlee@isu.edu.tw; Tel.: +886-7-657-7711 (ext. 7516)

(通訊作者非陳教授)

作者排序
(W2)

☒ 第一作者(X1)

☐ 通訊作者(X1)

☐ 第二作者(X0.8)

☐ 第三作者(X0.6)

☐ 第四作者(X0.4)

☐ 第五作者以上
(X0.2)

以莊賀喬教授之論文為例：
本篇文章莊教授為通訊作者，對應法規應x1



Electrochimica Acta

journal homepage: www.journals.elsevier.com/electrochimica-acta



Sansevieria trifasciata biomass-derived activated carbon by supercritical-CO₂ route: Electrochemical detection towards carcinogenic organic pollutant and energy storage application

Shobana Sebastin Mary Manickaraj^{a,b,1}, Sabarison Pandiyarajan^{a,b,1}, Ai-Ho Liao^{c,d}, Atchaya Ramachandran^e, Sheng-Tung Huang^a, Priyadharshini Natarajan^f, Ho-Chiao Chuang^{b,*}

^a Department of Chemical Engineering and Biotechnology, National Taipei University of Technology, Taipei 106344, Taiwan
^b Department of Mechanical Engineering, National Taipei University of Technology, Taipei 106344, Taiwan
^c Graduate Institute of Biomedical Engineering, National Taiwan University of Science and Technology, Taipei 106335, Taiwan
^d Department of Biomedical Engineering, National Defense Medical Center, Taipei 114201, Taiwan
^e PG & Research Department of Chemistry, Bishop Heber College, Tiruchirappalli 620017, India
^f Syngene International Pvt., Ltd. Bangalore, India

ARTICLE INFO

Keywords:
Activated carbon
Sansevieria trifasciata
Supercritical-CO₂
Electrochemical sensor
Supercapacitor

ABSTRACT

Activated carbon (AC) has been widely used for electrochemical applications, such as electrochemical sensors, energy storage applications, etc., due to its fine porous structure, volumetric capacitance, and chemical stability. Supercritical-CO₂ (SC-CO₂) has a fascinating advantage in material science due to its microbubble cavitation, high diffusivity, and high permeability. In the shed of light, we developed a high porous *Sansevieria trifasciata* biomass-derived AC by SC-CO₂ (SC-ST-AC). For comparison purposes, the AC was also prepared in a conventional approach (C-ST-AC). The prepared ACs were characterized through various spectroscopic and microscopic techniques to study their surface morphological character, structural analysis, and phase purity. The electrochemical performance was evaluated by two different applications: electrochemical detection and energy storage application. Based on the results, the SC-ST-AC exhibits higher porous architecture in their morphology and high phase purity with amorphous nature than C-ST-AC. In the preliminary electrochemical analysis, SC-ST-AC achieved higher performance than C-ST-AC. Thus, SC-ST-AC is applied to the real-time application and it exposed a superior limit of detection (0.005 μM L⁻¹) and sensitivity (0.854 μA μM⁻¹ cm⁻²) towards MA sensing and higher specific capacitance (342.5 F/g for 2 A/g) with 92.09 % of retention at high current density. Thereby, we suggest the SC-CO₂ method is a promising approach to develop a highly porous carbon material with excellent electrochemical performance.

1. Introduction

In recent eras, carbon-based materials including one-dimension (1D) carbon nanotubes, carbon nanofibers [1,2], two-dimension (2D) graphene [3], three-dimension (3D) graphite, activated carbon, and its derivatives [4,5] have been extensively investigated as successful commercialization materials in several sectors. Among them activated carbon (AC) is considered the most cardinal material for electrochemical application owing to its high surface area, porous architecture, and chemical stability [6-8]. The varieties of functional group moiety fascinated on the surface make it as a promising electrode material for

energy storage applications [9]. Traditionally, the preparation of AC is done by the pyrolysis of fossil raw materials such as coal and petroleum coke or wood, followed by a physical or chemical activation process [10]. Due to the rapid increase of the global population and economy, the demand for energy and resources is also increasing exponentially, resulting in a lack of fossil fuels [11]. Therefore, cost-effective renewable carbon sources, the development of economic efficiency methods, and environmental safety are all issues that must be thoroughly investigated to produce advanced activated carbon that is more environmentally friendly. In this regard, biomass materials are presently recognized as the most viable candidates for preparing carbon materials

* Corresponding author.
E-mail address: hchuang@mail.ntut.edu.tw (H.-C. Chuang).
¹ Authors contributed equally.

<https://doi.org/10.1016/j.electacta.2022.140672>
Received 10 January 2022; Received in revised form 25 May 2022; Accepted 1 June 2022
Available online 3 June 2022
0013-4686/© 2022 Elsevier Ltd. All rights reserved.

Shobana Sebastin Mary Manickaraj^{a,b,1}, Sabarison Pandiyarajan^{a,b,1}, Ai-Ho Liao^{c,d}, Atchaya Ramachandran^e, Sheng-Tung Huang^a, Priyadharshini Natarajan^f, Ho-Chiao Chuang^{b,*}

^a Department of Chemical Engineering and Biotechnology, National Taipei University of Technology, Taipei 106344, Taiwan
^b Department of Mechanical Engineering, National Taipei University of Technology, Taipei 106344, Taiwan
^c Graduate Institute of Biomedical Engineering, National Taiwan University of Science and Technology, Taipei 106335, Taiwan
^d Department of Biomedical Engineering, National Defense Medical Center, Taipei 114201, Taiwan
^e PG & Research Department of Chemistry, Bishop Heber College, Tiruchirappalli 620017, India
^f Syngene International Pvt., Ltd. Bangalore, India

作者排序
(W2)

☐ 第一作者(X1)

☒ 通訊作者(X1)

☐ 第二作者(X0.8)

☐ 第三作者(X0.6)

☐ 第四作者(X0.4)

☐ 第五作者以上
(X0.2)

* Corresponding author. (通訊作者)
E-mail address: hchuang@mail.ntut.edu.tw (H.-C. Chuang)
¹ Authors contributed equally.

續下頁

以林律吟教授之論文為例：

本篇文章林教授為**第二作者**(作者順序為第二位)，對應法規應**x0.8**

Contents lists available at ScienceDirect

Journal of Energy Storage

journal homepage: www.elsevier.com/locate/est

Research Papers

Novel incorporation of redox active organic molecule with activated carbon as efficient active material of supercapacitors

Tsung-Rong Kuo^{a,b,*}, Lu-Yin Lin^c, Subbiramaniyan Kubendhiran^c, Yi-Chiun Li^c, Ren-Jei Chung^c, Sibidou Yougbare^d

^a International PhD Program in Biomedical Engineering, College of Biomedical Engineering, Taipei Medical University, Taipei 11031, Taiwan
^b Graduate Institute of Nanomedicine and Medical Engineering, College of Biomedical Engineering, Taipei Medical University, Taipei 11031, Taiwan
^c Department of Chemical Engineering and Biotechnology, National Taipei University of Technology, Taipei, Taiwan
^d Institut de Recherche en Sciences de la Santé/Direction Régionale du Centre Ouest (IRSS/DRCO), BP 218, 11, Nanoro, Burkina Faso

ARTICLE INFO

Keywords:
Activated carbon
Coulombic efficiency
Redox active organic compounds
Flexible
Supercapacitor

ABSTRACT

Activated carbon (AC) is intensively applied as active material of supercapacitor (SC) due to high porosity and surface area. Incorporating battery-type materials in AC can enhance energy storage ability by generating redox reactions, but poor cycling stability of battery-type materials limits practical use of SC. Similar surface properties can be achieved by redox active organic compounds, which also possesses rich functional groups with extra redox ability. Unlike battery-type materials producing redox reactions from transition metals, incorporating organic molecule is expected to generate redox reactions without reducing cycling stability of AC. In this study, it is the first time to fabricate 1,4 benzene diboronic acid (DBA) and AC composite (DBA-AC) as active material of SC. The ratio of DBA and AC is optimized regarding to uniformity of DBA decoration. The optimized DBA-AC electrode presents a specific capacitance (C_s) of 211.4 F/g at 20 mV/s, owing to the largest surface area and abundant functional groups. A flexible symmetric SC based on the optimized DBA-AC electrodes shows the maximum energy density of 0.761 Wh/kg at the power density of 400 W/kg. The C_s retention of 110% and Coulombic efficiency higher than 95% after 10,000 times charge and discharge cycling process are also achieved.

1. Introduction

Energy generation and storage devices are quite important to solve the series energy issues for human beings [1–5]. Energy storage devices are eagerly developed for solving serious energy shortage problems. The high energy and power densities are significant for energy storage devices [6,7]. The excellent high-rate performance and long cycle life are also required to achieve wider applications [8,9]. Supercapacitor (SC) with high power density and long cycle life comparing to battery is a promising energy storage device to investigate [10–12]. The energy density of SC is also higher than the traditional capacitor. The energy storage mechanism of SC is classified into two sorts, electric double-layered capacitor (EDLC) and pseudocapacitor [13,14]. EDLC stores charges using ion adsorption and desorption mechanism, which promotes cycling stability but causes small energy density due to lack of Faradaic redox reactions [15].

Carbon materials are extensively used in SC applications due to their high conductivity, low cost and adaptable existing forms such as fibers, powders, and composites [16]. For instance, the carbon nanomaterials such as mesoporous carbon, activated carbon (AC) and graphitic nanocarbons with different morphologies including nanofibers, nanocoils, nanocoons and nanotubes has been widely applied in EDLCs as electrode materials [17–20]. The capacitive and diffusive criteria of AC materials lie on the presence of mesopores in the structure. The high porosity can facilitate soft diffusion of ions and confer lower relaxation time. Especially the hierarchical porosity can accelerate electrolyte infiltration and ion diffusion, and hence can improve ion accessibility into the entire electrode. Numerous studies utilized waste biomass to produce AC with very low costs and excellent surface properties [21–24]. Ahmed and co-workers applied chemical activation method with help of $ZnCl_2$ as activation reagent to fabricate porous AC from rotten carrot [25]. Gupta and co-workers used KGO as activation reagent in chemical process to

* Correspondence to: T.R. Kuo, International PhD Program in Biomedical Engineering, College of Biomedical Engineering, Taipei Medical University, Taipei 11031, Taiwan.
E-mail addresses: trkuo@tmu.edu.tw (T.-R. Kuo), lylin@ntut.edu.tw (L.-Y. Lin), kubechem@gmail.com (S. Kubendhiran), piay31302@gmail.com (Y.-C. Li), rjchung@ntut.edu.tw (R.-J. Chung), ysibidou@gmail.com (S. Yougbare).

<https://doi.org/10.1016/j.est.2022.105085>
Received 16 February 2022; Received in revised form 10 May 2022; Accepted 10 June 2022
Available online 9 July 2022
2352-152X/© 2022 Elsevier Ltd. All rights reserved.

Tsung-Rong Kuo^{a,b,*}, Lu-Yin Lin^c, Subbiramaniyan Kubendhiran^c, Yi-Chiun Li^c, Ren-Jei Chung^c, Sibidou Yougbare^d

^a International PhD Program in Biomedical Engineering, College of Biomedical Engineering, Taipei Medical University, Taipei 11031, Taiwan
^b Graduate Institute of Nanomedicine and Medical Engineering, College of Biomedical Engineering, Taipei Medical University, Taipei 11031, Taiwan
^c Department of Chemical Engineering and Biotechnology, National Taipei University of Technology, Taipei, Taiwan
^d Institut de Recherche en Sciences de la Santé/Direction Régionale du Centre Ouest (IRSS/DRCO), BP 218, 11, Nanoro, Burkina Faso

(通訊作者非林教授)

* Correspondence to: T.R. Kuo, International PhD Program in Biomedical Engineering, College of Biomedical Engineering, Taipei Medical University, Taipei 11031, Taiwan.
E-mail addresses: trkuo@tmu.edu.tw (T.-R. Kuo), lylin@ntut.edu.tw (L.-Y. Lin), kubechem@gmail.com (S. Kubendhiran), piay31302@gmail.com (Y.-C. Li), rjchung@ntut.edu.tw (R.-J. Chung), ysibidou@gmail.com (S. Yougbare).

作者排序
(W2)

- ☐ 第一作者(x1)
- ☐ 通訊作者(x1)
- ☒ 第二作者(x0.8)
- ☐ 第三作者(x0.6)
- ☐ 第四作者(x0.4)
- ☐ 第五作者以上(x0.2)

以林律吟教授之論文為例：
本篇文章林教授為第三作者(作者順序為第三位)，對應法規應x0.6

Journal of Energy Storage 55 (2022) 105420

Contents lists available at ScienceDirect

Journal of Energy Storage

journal homepage: www.elsevier.com/locate/est

Research Papers

Investigating energy storage ability of MIL101-(Fe) derivatives prepared using successive carbonization and oxidation for supercapacitors

Yung-Fu Wu^{a,1}, Tsung-Rong Kuo^{b,c,1,*}, Lu-Yin Lin^d, Subbiramaniyan Kubendhiran^d, Kuan-Chen Lai^d, Tzu-Yang Chen^d, Sibidou Yougbare^e

^a Department of Chemical Engineering, Ming Chi University of Technology, New Taipei City 24301, Taiwan
^b International PhD Program in Biomedical Engineering, College of Biomedical Engineering, Taipei Medical University, Taipei 11031, Taiwan
^c Graduate Institute of Nanomedicine and Medical Engineering, College of Biomedical Engineering, Taipei Medical University, Taipei 11031, Taiwan
^d Department of Chemical Engineering and Biotechnology, National Taipei University of Technology, Taipei, Taiwan
^e Institut de Recherche en Sciences de la Santé (IRSS-DRCO)/Nanoro, 03 B.P 7192, Ouagadougou 03, Burkina Faso

ARTICLE INFO

Keywords:
Fe₂O₃
Carbonization
Metal organic framework
MIL101(Fe)
Successive carbonization/oxidation
Supercapacitor

ABSTRACT

Metal organic framework (MOF) with high surface area and tunable porous size is largely used as active material of supercapacitor (SC). MIL-101(Fe) composed of iron ions and terephthalic acid ligand is candidate active material of SC owing to its possible formation of carbon and iron compounds. Combining carbon and metal compound is feasible to establish efficient active material with ion adsorption/desorption and redox reaction charge storage abilities. In this study, it is the first time to investigate physical and electrochemical properties of MIL101(Fe) derivatives synthesized using carbonization and successive carbonization/oxidation processes as active materials of SC. Carbonization temperature of MIL-101(Fe) is optimized regarding to morphology, composition and defect/graphitization ratio. The highest specific capacitance (C_p) of 95.7 F/g at 20 mV/s is obtained for the carbonized MIL-101(Fe) (MIL101(Fe)-C) prepared at 800 °C, due to rough surface, hollow structure and suitable defect to graphitization ratio. The MIL-101(Fe) and the successive carbonization/oxidation synthesized derivative electrodes merely achieve C_p values of 44.3 and 0.1 F/g, respectively. Symmetric SC fabricated using optimized MIL101(Fe)-C electrodes shows the maximum energy density of 1.13 Wh/kg at 400 W/kg and excellent cycling stability with C₂ retention of 96% and Coulombic efficiency of 72% in 8000 times repeated charging/discharging cycles.

1. Introduction

To solve serious energy shortage problems, developing efficient energy generation and storage devices are of great significance for human beings in recent years [1–8]. Batteries and capacitors are traditional energy storage devices which store charges by generating redox reactions and adsorbing/desorbing ions via static electricity, respectively [9]. By combining advantages of battery and capacitor, supercapacitor (SC) has been considered as one of effective energy storage devices owing to high specific power and long cycle life. SC stores charges by both ion adsorption/desorption and redox reactions, which mainly occurs on carbon materials and metal compounds, respectively [10,11]. Therefore, incorporating carbon materials with metal compounds as active material of SC is widely adopted to achieve excellent energy storage ability such as high specific energy and power as well as excellent cycling stability [12–14].

Metal organic framework (MOF) has been intensively applied as active material of SC, due to its high surface area and tunable porous size [15–18]. MOF with iron centers such as MIL-101(Fe) composed of coordinated iron ions linked by terephthalic acid ligands is promising active material of SC, due to the possible conversions to carbon material and iron compounds [19–21]. In previous studies, MIL-101(Fe) was commonly combined with carbon materials as active material of SC. Liu et al. prepared growth-oriented Fe-based MOF synergized with graphene aerogels composite for SC [16]. The carbonization process was also applied on MIL-101 to fabricate carbon and metal oxide composites.

* Corresponding author at: International PhD Program in Biomedical Engineering, College of Biomedical Engineering, Taipei Medical University, Taipei 11031, Taiwan.
E-mail address: trkuo@tmu.edu.tw (T.-R. Kuo).
¹ The authors contributed equally.

<https://doi.org/10.1016/j.est.2022.105420>
Received 2 June 2022; Received in revised form 9 July 2022; Accepted 29 July 2022
Available online 4 August 2022
2352-152X/© 2022 Elsevier Ltd. All rights reserved.

① ② ③

Yung-Fu Wu^{a,1}, Tsung-Rong Kuo^{b,c,1,*}, **Lu-Yin Lin^d**, Subbiramaniyan Kubendhiran^d, Kuan-Chen Lai^d, Tzu-Yang Chen^d, Sibidou Yougbare^e

^a Department of Chemical Engineering, Ming Chi University of Technology, New Taipei City 24301, Taiwan
^b International PhD Program in Biomedical Engineering, College of Biomedical Engineering, Taipei Medical University, Taipei 11031, Taiwan
^c Graduate Institute of Nanomedicine and Medical Engineering, College of Biomedical Engineering, Taipei Medical University, Taipei 11031, Taiwan
^d Department of Chemical Engineering and Biotechnology, National Taipei University of Technology, Taipei, Taiwan
^e Institut de Recherche en Sciences de la Santé (IRSS-DRCO)/Nanoro, 03 B.P 7192, Ouagadougou 03, Burkina Faso


作者排序
(W2)

☐第一作者(x1)
☐通訊作者(x1)
☐第二作者(x0.8)
☒第三作者(x0.6)
☐第四作者(x0.4)
☐第五作者以上
(x0.2)

* Corresponding author at: International PhD Program in Biomedical Engineering, College of Biomedical Engineering, Taipei Medical University, Taipei 11031, Taiwan.
E-mail address: trkuo@tmu.edu.tw (T.-R. Kuo).
¹ The authors contributed equally.

(通訊作者非林教授)

以陳生明教授之論文為例：
本篇文章陳教授為第四作者(作者順序為第四位)，對應法規應x0.4



Contents lists available at ScienceDirect

Journal of Alloys and Compounds

journal homepage: www.elsevier.com/locate/jalcom

Research Article

Direct Z-scheme WO₃/In₂S₃ heterostructures for enhanced photocatalytic reduction Cr(VI)

Yuxiang Hua^a, Chengyao Hu^b, Muhammad Arif^a, Shen-ming Chen^c, Min Zhang^{a,d,*}, Xiaoheng Liu^{a,**}

^a Key Laboratory of Education Ministry for Soft Chemistry and Functional Materials, Nanjing University of Science and Technology, Nanjing 210094, China
^b Advanced Analysis and Testing Center, Nanjing Forestry University, Nanjing 210037, China
^c Department of Chemical Engineering and Biotechnology, National Taipei University of Technology, Taipei 106, Taiwan, ROC
^d College of Chemistry and Material Engineering, Quzhou University, Quzhou, Zhejiang 324000, China

ARTICLE INFO

Article history:
Received 24 May 2021
Received in revised form 2 March 2022
Accepted 7 March 2022
Available online 11 March 2022

Keywords:
In₂S₃
WO₃
Z-scheme photocatalyst
Photocatalytic Cr(VI) reduction

ABSTRACT

The design of efficient and stable photocatalysts for the removal of heavy metals in the environment has become a research hotspot. Here, a composite photocatalyst with three-dimensional In₂S₃ microspheres supported by WO₃ nanoparticles was synthesized for the photoreduction of Cr(VI) for the first time. The constructed composite catalyst has a direct Z-scheme electron transport mechanism without any precious metals (Au, Pt, and Ag), quantum dots (TiO₂ QDs) or carbon materials (Graphene) as electronic media. Constructing a direct Z-scheme WO₃/In₂S₃ photocatalyst can greatly retain the reduction and oxidation reaction sites on the surface of the heterojunction and accelerate the reduction reaction. Under visible light irradiation, it greatly promotes the photocatalytic reduction of Cr(VI), which is 67.7 times and 3.6 times the reduction rates of WO₃ and In₂S₃, respectively. The favorable photocatalytic performance of WO₃/In₂S₃ should be attributed to the effective interfacial contact between the semiconductors in the Z-scheme system, thereby realizing effective electron transfer and charge separation. In addition, the stability of WO₃/In₂S₃ was studied, and a possible mechanism in the photoreduction process of Cr(VI) was proposed.
© 2022 Elsevier B.V. All rights reserved.

1. Introduction

With the development of industry, potentially toxic metals ions pose a major threat to the water environment [1–3]. As a common metal-chromium ions, it is widely used in electroplating, leather tanning, steelmaking, and chemical manufacturing [4–6]. Since Cr(VI) has a regular tetrahedral structure similar to PO₄³⁻ and SO₄²⁻, it can easily enter cells through anion channels, which seriously affects human health and safety [7]. In 2019, chromium compounds with hexavalent were included in the list of toxic and harmful water pollutants. As we all know, Cr(III) as a trace element of the human body, has the advantages of low mobility in aquatic environment and easy formation of Cr(OH)₃ precipitation in neutral or alkaline environments, which has become an effective way

to solve the pollution of Cr(VI) [8]. Generally, the sulfite or ferrous salt was used in industry to reduce Cr(VI) to Cr(III) in an acidic environment, and then alkali treatment is performed to obtain precipitate [9]. This method was prone to produce secondary solid waste and SO₂, which poses environmental hazards. In recent years, semiconductor photocatalysts have been generated electron-hole pairs under light excitation, in which electrons have strong reducibility without any pollution, and can be used to reduce Cr(VI) [10]. Wang et al. prepared CeO₂ nanotubes by a surfactant-assisted hydrothermal method for photoreduction of Cr(VI). The pure CeO₂ has weak photoreduction performance without adding oxalic acid [11]. Ren's group reported the use of ZnO to reduce Cr(VI) under ultraviolet light [12].

The photocatalysis has become a "green technology" for addressing environmental problems. To achieve the goal of photoreduction of Cr(VI), photocatalysts need to have narrower band gaps, more negative conduction band (CB) sites, and more positive valence band (VB) sites. This is difficult for a single photocatalytic material to have at the same time. The heterojunction catalytic system with Z-scheme electron transport mechanism can not only decrease the photo-generated electron-hole recombination rate, but also retain

* Corresponding author at: Key Laboratory of Education Ministry for Soft Chemistry and Functional Materials, Nanjing University of Science and Technology, Nanjing 210094, China
E-mail addresses: mzhang.chemmater@qzc.edu.cn (M. Zhang), xhliu@njjust.edu.cn (X. Liu).

① Yuxiang Hua^a, ② Chengyao Hu^b, ③ Muhammad Arif^a, ④ Shen-ming Chen^c, ⑤ Min Zhang^{a,d,*}, ⑥ Xiaoheng Liu^{a,**}

^a Key Laboratory of Education Ministry for Soft Chemistry and Functional Materials, Nanjing University of Science and Technology, Nanjing 210094, China
^b Advanced Analysis and Testing Center, Nanjing Forestry University, Nanjing 210037, China
^c Department of Chemical Engineering and Biotechnology, National Taipei University of Technology, Taipei 106, Taiwan, ROC
^d College of Chemistry and Material Engineering, Quzhou University, Quzhou, Zhejiang 324000, China

* Corresponding author at: Key Laboratory of Education Ministry for Soft Chemistry and Functional Materials, Nanjing University of Science and Technology, Nanjing 210094, China

** Corresponding author. (通訊作者非陳教授)
E-mail addresses: mzhang.chemmater@qzc.edu.cn (M. Zhang), xhliu@njjust.edu.cn (X. Liu).

作者排序 (W2)

☐ 第一作者(x1)
☐ 通訊作者(x1)
☐ 第二作者(x0.8)
☐ 第三作者(x0.6)
☒ 第四作者(x0.4)
☐ 第五作者以上 (x0.2)

以莊賀喬教授之論文為例：
本篇文章莊教授為第五作者(作者順序為第五位)，對應法規應x0.2

Received: 19 May 2022 | Revised: 29 October 2022 | Accepted: 8 November 2022
DOI: 10.1002/btm2.10450

BIOENGINEERING & TRANSLATIONAL MEDICINE

RESEARCH ARTICLE

Combined use of microbubbles of various sizes and single-transducer dual-frequency ultrasound for safe and efficient inner ear drug delivery

Ai-Ho Liao^{1,2} | Chih-Hung Wang^{3,4} | Bo-Han Wang⁵ | Yi-Chun Lin⁴ | Ho-Chiao Chuang⁵ | Hao-Li Liu⁶ | Cheng-Ping Shih³

¹Graduate Institute of Biomedical Engineering, National Taiwan University of Science and Technology, Taipei, Taiwan

²Department of Biomedical Engineering, National Defense Medical Center, Taipei, Taiwan

³Department of Otolaryngology-Head and Neck Surgery, Tri-Service General Hospital, National Defense Medical Center, Taipei, Taiwan

⁴Graduate Institute of Medical Sciences, National Defense Medical Center, Taipei, Taiwan

⁵Department of Mechanical Engineering, National Taipei University of Technology, Taipei, Taiwan

⁶Department of Electrical Engineering, National Taiwan University, Taipei, Taiwan

Correspondence

Cheng-Ping Shih, Department of Otolaryngology-Head and Neck Surgery, Tri-Service General Hospital, National Defense Medical Center, No. 325, Sec. 2, Chenggong Rd., Neihu District, Taipei City 11490, Taiwan. Email: eric660802@gmail.com, zhengping_shi@yahoo.com.tw

Funding information

Ministry of Science and Technology, Taiwan. Grant/Award Numbers: MOST108-2321-E-011-161-MY4, MOST110-2314-B-016-047-MY3, MOST110-2314-B-016-045, MOST109-2314-B-016-005; National Taiwan University of Science and Technology. Grant/Award Numbers: NTUST-TSGH-110-01, NTUST-TSGH-111-01; Tri-Service General Hospital. Grant/Award Numbers: TSGH-D-111059, TSGH-A-111001, TSGH-A-110001; Medical Affairs Bureau, Ministry of National Defense, ROC. Grant/Award Number: MAB-D-111145

Abstract

We have previously applied ultrasound (US) with microbubbles (MBs) to enhance inner ear drug delivery, with most experiments conducted using single-frequency, high-power density US, and multiple treatments. In the present study, the treatment efficacy was enhanced and safety concerns were addressed using a combination of low-power-density, single-transducer, dual-frequency US ($I_{SPTA} = 213 \text{ mW/cm}^2$) and MBs of different sizes coated with insulin-like growth factor-1 (IGF-1). This study is the first to investigate the drug-coating capacity of human serum albumin (HSA) MBs of different particle sizes and their drug delivery efficiency. The concentration of HSA was adjusted to produce different MB sizes. The drug-coating efficiency was significantly higher for large-sized MBs than for smaller MBs. In vitro Franz diffusion experiments showed that the combination of dual-frequency US and large MB size delivered the most IGF-1 ($24.3 \pm 0.47 \text{ ng/cm}^2$) to the receptor side at the second hour of treatment. In an in vivo guinea pig experiment, the efficiency of IGF-1 delivery into the inner ear was 15.9 times greater in animals treated with the combination of dual-frequency US and large MBs (D-USMB) than in control animals treated with round window soaking (RWS). The IGF-1 delivery efficiency was 10.15 times greater with the combination of single-frequency US and large size MBs (S-USMB) than with RWS. Confocal microscopy of the cochlea showed a stronger distribution of IGF-1 in the basal turn in the D-USMB and S-USMB groups than in the RWS group. In the second and third turns, the D-USMB group showed the greatest IGF-1 distribution.

Ai-Ho Liao and Chih-Hung Wang contributed equally to this study.

This is an open access article under the terms of the [Creative Commons Attribution License](#), which permits use, distribution and reproduction in any medium, provided the original work is properly cited.
© 2022 The Authors. Bioengineering & Translational Medicine published by Wiley Periodicals LLC on behalf of American Institute of Chemical Engineers.

Bioeng Transl Med. 2023;8:e10450.
<https://doi.org/10.1002/btm2.10450>

wileyonlinelibrary.com/journal/btm2 | 1 of 14

Ai-Ho Liao^{1,2} | Chih-Hung Wang^{3,4} | Bo-Han Wang⁵ | Yi-Chun Lin⁴ | Ho-Chiao Chuang⁵ | Hao-Li Liu⁶ | Cheng-Ping Shih³

¹Graduate Institute of Biomedical Engineering, National Taiwan University of Science and Technology, Taipei, Taiwan

²Department of Biomedical Engineering, National Defense Medical Center, Taipei, Taiwan

³Department of Otolaryngology-Head and Neck Surgery, Tri-Service General Hospital, National Defense Medical Center, Taipei, Taiwan

⁴Graduate Institute of Medical Sciences, National Defense Medical Center, Taipei, Taiwan

⁵Department of Mechanical Engineering, National Taipei University of Technology, Taipei, Taiwan

⁶Department of Electrical Engineering, National Taiwan University, Taipei, Taiwan

Correspondence (通訊作者非莊教授)

Cheng-Ping Shih, Department of Otolaryngology-Head and Neck Surgery, Tri-Service General Hospital, National Defense Medical Center, No. 325, Sec. 2, Chenggong Rd., Neihu District, Taipei City 11490, Taiwan. Email: eric660802@gmail.com, zhengping_shi@yahoo.com.tw

作者排序 (W2)

☐ 第一作者(x1)

☐ 通訊作者(x1)

☐ 第二作者(x0.8)

☐ 第三作者(x0.6)

☐ 第四作者(x0.4)

☒ 第五作者以上 (x0.2)

查詢W2方式

注意事項:

1. 需檢附論文第一頁為佐證資料。
2. 第一作者到第五作者依由左至右的順序排列。
3. 通訊作者通常會使用*字號、或是下方會有一欄 **Corresponding author** 的部份，如還查不到的話建議使用WOS查詢。

WOS查詢畫面:

An Upper Extremity Rehabilitation System Using Efficient Vision-Based Action Identification Techniques

By Chen, YL (Chen, Yen-Lin) [1]; Liu, CH (Liu, Chin-Hsuan) [1]; Yu, CW (Yu, Chao-Wei) [1]; Lee, P (Lee, Posen) [2]; Kuo, YW (Kuo, Yao-Wen) [1]

View Web of Science ResearcherID and ORCID (provided by Clarivate)

Source APPLIED SCIENCES-BASEL
Volume: 8 Issue: 7
DOI: 10.3390/app8071161

Article Number 1161

Published JUL 2018

Indexed 2018-09-07

Document Type Article

Abstract This study proposes an action identification system for home upper extremity rehabilitation. In the proposed system, we apply an RGB-depth (color-depth) sensor to capture the image sequences of the patient's upper extremity actions to identify its movements. We apply a skin color detection technique to assist with extremity identification and to build up the upper extremity skeleton points. We use the dynamic time warping algorithm to determine the rehabilitation actions. The system presented herein builds up upper extremity skeleton points rapidly. Through the upper extremity of the human skeleton and human skin color information, the upper extremity skeleton points are effectively established by the proposed system, and the rehabilitation actions of patients are identified by a dynamic time warping algorithm. Thus, the proposed system can achieve a high recognition rate of 98% for the defined rehabilitation actions for the various muscles. Moreover, the computational speed of the proposed system can reach 125 frames per second-the processing time per frame is less than 8 ms on a personal computer platform. This computational efficiency allows efficient extensibility for future developments to deal with complex ambient environments and for implementation in embedded and pervasive systems. The major contributions of the study are: (1) the proposed system is not only a physical exercise game, but also a movement training program for specific muscle groups; (2) The hardware of upper extremity rehabilitation system included a personal computer with personal camera and a depth camera. These are economic equipment, so that patients who need this system can set up one set at home; (3) patients can perform rehabilitation actions in sitting position to prevent him/her from falling down during training; (4) the accuracy rate of identifying rehabilitation action is as high as 98%, which is sufficient for distinguishing between correct and wrong action when performing specific action trainings; (5) The proposed upper extremity rehabilitation system is real-time, efficient to vision-based action identification, and low-cost hardware and software, which is affordable for most families.

Keywords Author Keywords: upper extremity identification; color and depth sensors; skeleton points; rehabilitation actions; home rehabilitation; computer vision
Keywords Plus: COST-EFFECTIVENESS; TELEMEDICINE; CARE; BALANCE; TELEHEALTH; TOOL

Author Information
Corresponding Address: Lee, Posen (corresponding author)
▲ I Shou Univ, Dept Occupat Therapy, Kaohsiung 82445, Taiwan

Author Information
Corresponding Address: Lee, Posen (corresponding author)
▲ I Shou Univ, Dept Occupat Therapy, Kaohsiung 82445, Taiwan

查詢W3方式

依ppt第15~16頁方式下載論文檔案

以莊賀喬教授之論文為例: (只有一位通訊作者之狀況)

本篇文章通訊作者只有一位, 對應法規應x1

Electrochimica Acta

journal homepage: www.journals.elsevier.com/electrochimica-acta

Sansevieria trifasciata biomass-derived activated carbon by supercritical-CO₂ route: Electrochemical detection towards carcinogenic organic pollutant and energy storage application

Shobana Sebastin Mary Manickaraj^{a,b,1}, Sabarison Pandiyarajan^{a,b,1}, Ai-Ho Liao^{c,d}, Atchaya Ramachandran^e, Sheng-Tung Huang^a, Priyadharshini Natarajan^f, Ho-Chiao Chuang^{b,*}

^a Department of Chemical Engineering and Biotechnology, National Taipei University of Technology, Taipei 106344, Taiwan
^b Department of Mechanical Engineering, National Taipei University of Technology, Taipei 106344, Taiwan
^c Graduate Institute of Biomedical Engineering, National Taiwan University of Science and Technology, Taipei 106335, Taiwan
^d Department of Biomedical Engineering, National Defense Medical Center, Taipei 114201, Taiwan
^e PG & Research Department of Chemistry, Bishop Heber College, Tiruchirappalli 620017, India
^f Syngene International Pvt., Ltd. Bangalore, India

ARTICLE INFO

Keywords:
Activated carbon
Sansevieria trifasciata
Supercritical-CO₂
Electrochemical sensor
Supercapacitor

ABSTRACT

Activated carbon (AC) has been widely used for electrochemical applications, such as electrochemical sensors, energy storage applications, etc., due to its fine porous structure, volumetric capacitance, and chemical stability. Supercritical-CO₂ (SC-CO₂) has a fascinating advantage in material science due to its microbubble cavitation, high diffusivity, and high permeability. In the shed of light, we developed a high porous *Sansevieria trifasciata* biomass-derived AC by SC-CO₂ (SC-ST-AC). For comparison purposes, the AC was also prepared in a conventional approach (C-ST-AC). The prepared ACs were characterized through various spectroscopic and microscopic techniques to study their surface morphological character, structural analysis, and phase purity. The electrochemical performance was evaluated by two different applications: electrochemical detection and energy storage application. Based on the results, the SC-ST-AC exhibits higher porous architecture in their morphology and high phase purity with amorphous nature than C-ST-AC. In the preliminary electrochemical analysis, SC-ST-AC achieved higher performance than C-ST-AC. Thus, SC-ST-AC is applied to the real-time application and it exposed a superior limit of detection (0.005 μM L⁻¹) and sensitivity (0.854 μA μM⁻¹ cm⁻²) towards MA sensing and higher specific capacitance (342.5 F/g for 2 A/g) with 92.09 % of retention at high current density. Thereby, we suggest the SC-CO₂ method is a promising approach to develop a highly porous carbon material with excellent electrochemical performance.

1. Introduction

In recent eras, carbon-based materials including one-dimension (1D) carbon nanotubes, carbon nanofibers [1,2], two-dimension (2D) graphene [3], three-dimension (3D) graphite, activated carbon, and its derivatives [4,5] have been extensively investigated as successful commercialization materials in several sectors. Among them activated carbon (AC) is considered the most cardinal material for electrochemical application owing to its high surface area, porous architecture, and chemical stability [6-8]. The varieties of functional group moiety fascinated on the surface make it as a promising electrode material for energy storage applications [9]. Traditionally, the preparation of AC is done by the pyrolysis of fossil raw materials such as coal and petroleum coke or wood, followed by a physical or chemical activation process [10]. Due to the rapid increase of the global population and economy, the demand for energy and resources is also increasing exponentially, resulting in a lack of fossil fuels [11]. Therefore, cost-effective renewable carbon sources, the development of economic efficiency methods, and environmental safety are all issues that must be thoroughly investigated to produce advanced activated carbon that is more environmentally friendly. In this regard, biomass materials are presently recognized as the most viable candidates for preparing carbon materials

* Corresponding author.
E-mail address: hchuang@mail.ntut.edu.tw (H.-C. Chuang).
¹ Authors contributed equally.

<https://doi.org/10.1016/j.electacta.2022.140672>
Received 10 January 2022; Received in revised form 25 May 2022; Accepted 1 June 2022
Available online 3 June 2022
0013-4686/© 2022 Elsevier Ltd. All rights reserved.

Shobana Sebastin Mary Manickaraj^{a,b,1}, Sabarison Pandiyarajan^{a,b,1}, Ai-Ho Liao^{c,d}, Atchaya Ramachandran^e, Sheng-Tung Huang^a, Priyadharshini Natarajan^f, Ho-Chiao Chuang^{b,*}

^a Department of Chemical Engineering and Biotechnology, National Taipei University of Technology, Taipei 106344, Taiwan
^b Department of Mechanical Engineering, National Taipei University of Technology, Taipei 106344, Taiwan
^c Graduate Institute of Biomedical Engineering, National Taiwan University of Science and Technology, Taipei 106335, Taiwan
^d Department of Biomedical Engineering, National Defense Medical Center, Taipei 114201, Taiwan
^e PG & Research Department of Chemistry, Bishop Heber College, Tiruchirappalli 620017, India
^f Syngene International Pvt., Ltd. Bangalore, India

共同作者數
(W3)

- ☐ 無(x1)
☐ 1位通訊作者(x1)
☐ 2位(含)以上通訊作者(x0.8)
☐ 有多位作者
Equal Contribution (x0.8)

* Corresponding author. (通訊作者)
E-mail address: hchuang@mail.ntut.edu.tw (H.-C. Chuang)
¹ Authors contributed equally.

續下頁

以莊賀喬教授之論文為例: (有兩位通訊作者之狀況)
本篇文章通訊作者有兩位且均為國內學者，對應法規應x0.8



Contents lists available at ScienceDirect

Biomedical Signal Processing and Control

journal homepage: www.elsevier.com/locate/bspc

Check for updates

Combining the wavelet transform with a phase-lead compensator to a respiratory motion compensation system with an ultrasound tracking technique in radiation therapy

Chia-Chun Kuo^{a,d,e}, Ming-Lu Guo^g, Ai-Ho Liao^{b,c}, Hsiao-Wei Yu^{a,f}, Muthusankar Ganesan^{g,k}, Chu-Wei Li^g, Shiu-Chen Jeng^{a,h}, Jeng-Fong Chiou^{a,i,j}, Lai-Lei Ting^{a,*}, Ho-Chiao Chuang^{g,*}

^a Department of Radiation Oncology, Taipei Medical University Hospital, Taipei, Taiwan
^b Graduate Institute of Biomedical Engineering, National Taiwan University of Science and Technology, Taipei, Taiwan
^c Department of Biomedical Engineering, National Defense Medical Center, Taipei, Taiwan
^d Department of Radiation Oncology, Wan Fang Hospital, Taipei Medical University, Taipei, Taiwan
^e School of Health Care Administration, College of Management, Taipei Medical University, Taipei, Taiwan
^f School of Biomedical Engineering, College of Biomedical Engineering, Taipei Medical University, Taipei, Taiwan
^g Department of Mechanical Engineering, National Taipei University of Technology, Taipei, Taiwan
^h School of Dentistry, College of Oral Medicine, Taipei Medical University, Taipei, Taiwan
ⁱ Department of Radiology, School of Medicine, College of Medicine, Taipei Medical University, Taipei, Taiwan
^j Taipei Cancer Center, Taipei Medical University, Taipei, Taiwan
^k Department of Industrial Chemistry, Alagappa University, Karaikudi 630001, Tamil Nadu, India

ARTICLE INFO

Keywords:
Wavelet transform
Respiratory motion compensation
Ultrasound image tracking

ABSTRACT

This study evaluated the feasibility of applying the wavelet transform (WT) combined with a phase-lead compensator (PLC) to our previously developed two-dimensional respiratory motion compensation system (RMCS). This system automatically and instantaneously adjusts PLC parameters according to different respiration signals to reduce influences of the system delay time, improving the compensation effect of the RMCS during respiratory motion compensation. This study performed respiratory movement compensation experiments with a two-dimensional respiratory motion simulation system (RMSS) and the RMCS. Human respiratory signals were captured using our previously developed ultrasound image tracking algorithm (UITA). In this study, a displacement compensation RMCS algorithm based on the combination of WT and PLC was developed by LabVIEW, which allows an automatic adjustment of the PLC parameters according to various respiratory waveforms, achieving a better compensation effect. The experiment results indicated that the compensation rate (CR) of right-left and superior-inferior directions had both improved 67.96–88.05% and 70.38–91.43%, respectively. In this study, the proposed method combined with WT and PLC applied in respiratory movement compensation experiments; the UITA was used for tracking diaphragm motion which substitutes for tumor motion. This noninvasive monitoring method also helps reduce side effects after treatment. The experimental results indicated that the effect of using the WT combined with the PLC to compensate for various respiratory signals was improved over our previously developed compensation algorithm.

1. Introduction

During radiotherapy, the anatomical structure and location of a lesion are usually different from those of the target used in the treatment planning system. One of the main reasons for this is the organ movement that occurs while breathing, which also causes the tumor to deviate from the original irradiation target position during the treatment [1–3]. The tumor movement makes actual dose distribution differ from the expected dose distribution, resulting insufficient dose coverage on target tumor and excessive dose on surrounding tissues. The unwanted dose distribution increases serious side effects and great reduction of treatment effectiveness. Langen et al. [4] documented many types of organ movements, including types of the liver, diaphragm, kidney, pancreas, lung tumors, and prostate. Diaphragm and liver are affected by

* Corresponding authors.
E-mail addresses: lt1957@gmail.com (L.-L. Ting), hchuang@mail.ntut.edu.tw (H.-C. Chuang).

<https://doi.org/10.1016/j.bspc.2022.103892>
Received 21 March 2022; Received in revised form 23 May 2022; Accepted 12 June 2022
Available online 17 June 2022
1746-8094/© 2022 Elsevier Ltd. All rights reserved.

Chia-Chun Kuo^{a,d,e}, Ming-Lu Guo^g, Ai-Ho Liao^{b,c}, Hsiao-Wei Yu^{a,f}, Muthusankar Ganesan^{g,k}, Chu-Wei Li^g, Shiu-Chen Jeng^{a,h}, Jeng-Fong Chiou^{a,i,j}, Lai-Lei Ting^{a,*}, Ho-Chiao Chuang^{g,*}

- ^a Department of Radiation Oncology, Taipei Medical University Hospital, Taipei, Taiwan
^b Graduate Institute of Biomedical Engineering, National Taiwan University of Science and Technology, Taipei, Taiwan
^c Department of Biomedical Engineering, National Defense Medical Center, Taipei, Taiwan
^d Department of Radiation Oncology, Wan Fang Hospital, Taipei Medical University, Taipei, Taiwan
^e School of Health Care Administration, College of Management, Taipei Medical University, Taipei, Taiwan
^f School of Biomedical Engineering, College of Biomedical Engineering, Taipei Medical University, Taipei, Taiwan
^g Department of Mechanical Engineering, National Taipei University of Technology, Taipei, Taiwan
^h School of Dentistry, College of Oral Medicine, Taipei Medical University, Taipei, Taiwan
ⁱ Department of Radiology, School of Medicine, College of Medicine, Taipei Medical University, Taipei, Taiwan
^j Taipei Cancer Center, Taipei Medical University, Taipei, Taiwan
^k Department of Industrial Chemistry, Alagappa University, Karaikudi 630001, Tamil Nadu, India

共同作者數
(W3)

- ☐ 無(x1)
☐ 1位通訊作者
(x1)
☒ 2位(含)以上通
訊作者(x0.8)
☐ 有多位作者
Equal
Contribution
(x0.8)

(通訊作者)

* Corresponding authors.

E-mail addresses: lt1957@gmail.com (L.-L. Ting), hchuang@mail.ntut.edu.tw (H.-C. Chuang).

續下頁

以莊賀喬教授之論文為例：(有兩位通訊作者之狀況)

本篇文章通訊作者有兩位，除莊教授外另外一位為國外學者，對應法規應x1

Contents lists available at ScienceDirect

Journal of Alloys and Compounds

journal homepage: www.elsevier.com/locate/jalcom

Robust fabrication of silver pyro-vanadates via sonochemical approach for advanced energy storage application

Sabarison Pandiyarajan^{a,b}, Rajkumar Srinivasan^c, Shobana Sebastin Mary Manickaraj^{a,b}, Ho-Chiao Chuang^{b,*}, Princy Merlin Johnson^{c,*}

^a Department of Chemical Engineering, National Taipei University of Technology, Taipei 10608, Taiwan
^b Department of Mechanical Engineering, National Taipei University of Technology, Taipei 10608, Taiwan
^c PG and Research Department of Chemistry, Bishop Heber College, Bharathidasan University, Tiruchirappalli, India

ARTICLE INFO

Article history:
Received 14 June 2021
Received in revised form 9 September 2021
Accepted 5 October 2021
Available online 8 October 2021

Keywords:
Silver pyro-vanadates
Ultrasonication, Specific capacity
Energy storage systems

ABSTRACT

One of the major challenges in the twenty-first century is the development of ultrahigh performance electrical energy storage (ES) devices with faster, safer, and more efficient ES materials. Herein, we report newly designed silver vanadates ($\text{Ag}_4\text{V}_2\text{O}_7$), which serve as significant electrode material for upcoming ES devices due to its greater electrical conductivity as well as electrochemical activity. $\text{Ag}_4\text{V}_2\text{O}_7$ were synthesized by the ultrasonication method. The as-synthesized material was characterized with various spectral as well as analytical methods. Furthermore, the supercapacitive property of $\text{Ag}_4\text{V}_2\text{O}_7$ was evaluated using different electroanalytical techniques. The $\text{Ag}_4\text{V}_2\text{O}_7$ electrode exhibited well electrochemical performance with a specific capacity (C_{sp}) of 548 C g^{-1} at the current density of 1 Ag^{-1} and significant capacity retention of 88.7% even after 5000 GCD cycles at 6 Ag^{-1} . The lowest value of charge transfer resistance ($R_{ct} = 4.12 \text{ }\Omega$), and equivalent series resistance (ESR = $6.33 \text{ }\Omega$) exposed the faster reaction kinetics. The superior electrochemical performance was ascribed to its unique structure, which contributes to high conductivity, easy electron transfer, short ion diffusion distances, fast kinetics as well as a huge number of active sites in the electrode material. The electrochemical results demonstrated that $\text{Ag}_4\text{V}_2\text{O}_7$ could be utilized as electro-active material for advanced energy storage systems.

© 2021 Elsevier B.V. All rights reserved.

1. Introduction

Energy crisis is one of the most pressing problems in the current scenario. Considerations about greenhouse effect have prompted researchers to perform a detailed investigation on energy conversion as well as storage technology [1]. In order to solve this issue, fuel cells, batteries and supercapacitors have become more popular as strong candidates [2]. Supercapacitors (SCs) have received a lot of attention as a type of high-efficiency energy storage device because they can deliver more power density with a longer cycling lifespan than batteries and store more energy density than conventional capacitors. Furthermore, due to their rapid rechargeability, much greater cycling stability, and higher rate capability, SCs are good alternatives for a battery replacement if their energy density is significantly high [3–6].

Based on the principle of charge storage process, there are three types of SCs: the electric double layer (EDLC) [7], pseudocapacitors (PCs) [8] as well as hybrid capacitors [9]. The former is distinguished primarily via ion as well as electron separation at the electrode/electrolyte interface, while a Faradaic charge transfer reaction takes place at the active material in a redox pseudo capacitor. Hybrid capacitors are operating by the combination of Faradaic as well as Non-Faradaic reactions. Many researchers have made great efforts to study PCs because their energy density is substantially higher than EDLCs [10,11].

Because of the large C_{sp} and superlative redox activity, transition metal oxides (TMOs) have been found to be promising as electrodes for PCs over the last few decades [12–14]. Several TMOs, like RuO_2 , MnO_2 , NiO , Co_3O_4 , MoO_3 , and SnO_2 , were efficiently used as electrode materials in PCs. During the charge/discharge processes, PCs with these kinds of electrodes invariably exhibited poor stability, high resistance as well as large volume changes [15]. To address this concern, mixed TMOs have emerged as promising electrodes for SCs owing to their ability to improve electrochemical performance in terms of cycle stability, specific capacity as well as electrical conductivity [16]. Among the TMOs, mixed metal oxides, binary,

* Corresponding authors.
E-mail addresses: sabarison6@gmail.com (S. Pandiyarajan), hchuang@mail.ntut.edu.tw (H.-C. Chuang), pmej_68@yahoo.co.in (P.M. Johnson).

<https://doi.org/10.1016/j.jalcom.2021.162268>
0925-8388/© 2021 Elsevier B.V. All rights reserved.

Sabarison Pandiyarajan^{a,b}, Rajkumar Srinivasan^c, Shobana Sebastin Mary Manickaraj^{a,b}, Ho-Chiao Chuang^{b,*}, Princy Merlin Johnson^{c,*}

^a Department of Chemical Engineering, National Taipei University of Technology, Taipei 10608, Taiwan

^b Department of Mechanical Engineering, National Taipei University of Technology, Taipei 10608, Taiwan

^c PG and Research Department of Chemistry, Bishop Heber College, Bharathidasan University, Tiruchirappalli, India

共同作者數
(W3)

☐ 無 (x1)

☒ 1位通訊作者
(x1)

☐ 2位(含)以上通
訊作者 (x0.8)

☐ 有多位作者
Equal
Contribution
(x0.8)


(通訊作者)

* Corresponding authors.

E-mail addresses: sabarison6@gmail.com (S. Pandiyarajan),
hchuang@mail.ntut.edu.tw (H.-C. Chuang), pmej_68@yahoo.co.in (P.M. Johnson).

續下頁


以林律吟教授之論文為例: (有多位共同貢獻作者之狀況)
本篇文章有**多位Equal Contribution**，對應法規應**x0.8**



Contents lists available at ScienceDirect

Journal of Alloys and Compounds

journal homepage: www.elsevier.com/locate/jalcom



Investigating energy storage ability of ZIF67-derived perovskite fluoride via tuning ammonium fluoride amounts

Pin-Yan Lee^{a,1}, Lu-Yin Lin^{a,b,*,1}

^a Department of Chemical Engineering and Biotechnology, National Taipei University of Technology, Taipei, Taiwan
^b Research Center of Energy Conservation for New Generation of Residential, Commercial, and Industrial Sectors, Taipei, Taiwan

ARTICLE INFO

Article history:
Received 7 July 2021
Received in revised form 25 September 2021
Accepted 28 September 2021
Available online 29 September 2021

Keywords:
Ammonia fluoride
Ligand
Perovskite
Supercapacitor
ZIF67
2-methylimidazole

ABSTRACT

Zeolitic imidazolate framework 67 (ZIF67) is widely considered as potential active material for supercapacitors (SC) due to large surface area and tunable structures, but small electrical conductivity limits its energy storage ability. Fluoride with high electrical conductivity is reported to be beneficial on reducing charge-transfer resistance of SC. In this study, ZIF67-derived perovskite fluoride is synthesized using ammonium fluoride (NH₄F) as electroactive material of SC at the first time. Different NH₄F amounts are used to produce perovskite ZIF67-derived fluorides (ZIF67-N). The optimized ZIF67-N electrode shows specific capacitance (C_s) of 636.8 F/g at 10 mV/s, owing to small particle size and suitable F to 2-methylimidazole ratio for providing high electronegativity. The ZIF67 and cobalt nickel fluoride prepared using NH₄F but no 2-methylimidazole (CoNi-N) are synthesized to understand roles of fluorine and 2-methylimidazole on energy storage. The ZIF67 electrode shows much smaller C_s (1.6 F/g) than ZIF67-N electrode, owing to largely enhanced pore width of ZIF67-N even if surface area is largely reduced when NH₄F is added during synthesis. The SC comprising optimized ZIF67-N electrodes shows maximum energy density of 27.2 Wh/kg at 650.0 W/kg as well as C_s retention of 86% and Coulombic efficiency of 100% in 8000 times charge/discharge process.

© 2021 Elsevier B.V. All rights reserved.

1. Introduction

Metal organic framework (MOF) with high surface area and tunable structure has been largely applied on energy storage for recent years [1–4]. Zeolitic imidazolate framework 67 (ZIF67) consisted of cobalt ion center and 2-methylimidazole ligand is one of the potential electroactive materials for supercapacitors (SC) [5–7]. However, the intrinsic nature of ZIF67 is not highly capacitive for storing charges even if ZIF67 possesses high surface area for carrying out large amounts of electrochemical reactions. Numerous ex-situ methods were applied on modifying ZIF67 with high redox activity and electrical conductivity. Zhang and co-workers prepared ZIF-derived carbon using co-carbonization technique and obtained a specific capacitance (C_s) of 228 F/g at 0.1 A/g [8]. Hu *et al.* assembled SC using ZIF-67/amorphous ZIF electrode and capacity retention of 100% after 2000 cycles was obtained [9]. Zhang *et al.* synthesized amorphous carbon@graphite carbon nanoleaves by carbonization of ZIF-Li(Zn)/ZIF67 nanoleaves and achieved C_s of 252.1 F/g [10]. Combining ZIF67 with carbon materials is also applied to improve energy storage ability of ZIF67 [11,12]. Jian *et al.* designed cobalt sulfide nanocage derived from ZIF interconnected by carbon nanotubes as electrode material for SC [11]. Sundriya *et al.* synthesized ZIF67 and reduced graphene oxide (rGO) composite using stirring approach and obtained C_s of 326 F/g at 3 A/g [12].

However, comparing to the ex-situ method, the in-situ method is more likely to reduce the experimental process via directly modifying the process of forming MOF derivatives at the very beginning. Also, the nature of MOF derivatives could be much easier to design using in-situ techniques. It was reported that ligand plays important roles on intrinsic properties of MOF, such as chemical stability, rigidity and flexibility [13–15]. Lv *et al.* proposed that stability of MOF relies on robustness of metal ion/ligand coordination bonds. They demonstrated a ligand-rigidification strategy to enhance stability of MOF, including thirteen Zn-based MOF constructed with Zr₆O₄(OH)₄(-CO₂)₆ units and corresponding ligands. The replacing ligand in ZIF67 to enhance derivatives may be possible to improve the energy storage ability. Ammonium fluoride has been reported to play

* Corresponding author at: Department of Chemical Engineering and Biotechnology, National Taipei University of Technology, Taipei, Taiwan.
E-mail address: lylin@ntut.edu.tw (L.-Y. Lin).

¹ The authors are equally contributed.

<https://doi.org/10.1016/j.jalcom.2021.162191>
0925-8388/© 2021 Elsevier B.V. All rights reserved.

Pin-Yan Lee^{a,1}

Lu-Yin Lin^{a,b,*,1}

^a Department of Chemical Engineering and Biotechnology, National Taipei University of Technology, Taipei, Taiwan
^b Research Center of Energy Conservation for New Generation of Residential, Commercial, and Industrial Sectors, Taipei, Taiwan

共同作者數 (W3)

☐ 無(x1)
☐ 1位通訊作者(x1)
☐ 2位(含)以上通訊作者(x0.8)
☒ 有多位作者 Equal Contribution (x0.8)

* Corresponding author at: Department of Chemical Engineering and Biotechnology, National Taipei University of Technology, Taipei, Taiwan.
E-mail address: lylin@ntut.edu.tw (L.-Y. Lin).

¹ The authors are equally contributed.

27

查詢W3方式

注意事項:

- 1. 國際學者的定義:除台灣以外皆是外國，且單位須為學術機構(學校、研究機構)。
- 2. 需檢附論文第一頁為佐證資料。

(二) 作者排序(W2)：作者排序與相對應的權重。

作者排序	<u>第一作者</u>	<u>通訊作者</u>	第二作者	第三作者	第四作者	第五作者以上
權重 2 (W2)	<u>1</u>	<u>1</u>	0.8	0.6	0.4	0.2

(三) 共同作者數(W3)：

- 1. 若為通訊作者，且該篇文章有兩位以上通訊作者，則該篇須乘以0.8，惟如與國際學者合著者，該國際學者不受此限。
- 2. 如申請者同屬該篇文章多位 Equal Contribution 之一，則該篇應乘以0.8。

通訊作者數	1 位通訊作者	2 位(含)以上通訊作者 (若其他通訊作者皆為國際學者則不需 x0.8)	<u>有多位 Equal Contribution</u>
權重 3 (W3)	1	0.8	<u>0.8</u>

情境模擬	w2	w3
為第一作者	1	1
為通訊作者，只有一位	1	1
為通訊作者，且兩位以上 (都是國內學者)	1	0.8
為通訊作者，且兩位以上 (除了申請人以外都是國外學者)	1	1
第二作者後，且不是通訊作者	對應 點數	1
相同貢獻之第一作者	1	0.8
相同貢獻之通訊作者	1	0.8

查詢W4方式-企業

依ppt第15~16頁方式下載論文檔案，作者下方之區域，可以看到企業以莊賀喬教授之論文為例：

本篇文章有企業，對應法規應x1.1



ELSEVIER

Contents lists available at ScienceDirect

Food Chemistry

journal homepage: www.elsevier.com/locate/foodchem

3D-flower-like porous neodymium molybdate nanostructure for trace level detection of organophosphorus pesticide in food samples

Muthusankar Ganesan^{a,c}, Ramadhass Keerthika Devi^b, Ai-Ho Liao^{d,e}, Kuo-Yu Lee^f,
Gopu Gopalakrishnan^c, Ho-Chiao Chuang^{a,*}

^a Department of Mechanical Engineering, National Taipei University of Technology, Taipei, 10608, Taiwan, ROC

^b Department of Chemical Engineering and Biotechnology, College of Engineering, National Taipei University of Technology, Taipei 106, Taiwan, ROC

^c Department of Industrial Chemistry, Alagappa University, Karaikudi 630003, Tamil Nadu, India

^d Graduate Institute of Biomedical Engineering, National Taiwan University of Science and Technology, Taipei, Taiwan

^e Department of Biomedical Engineering, National Defense Medical Center, Taipei, Taiwan

^f SV Probe Technology Taiwan Co., Ltd. Zhubei, Taiwan

額外加權
(W4)

☐ 無 (x1)

☒ 企業 (x1.1)

☐ SDG (x1.1)

☐ SSCI (x1.5)

☐ 企業、SDG (x1.2)

☐ 企業、SSCI (x1.6)

☐ SDG、SSCI (x1.6)

☐ 企業、SDG、SSCI (x1.8)

續下頁


查詢W4方式-企業

企業通常為**crop**、**Ltd**、**醫院**，若非前述情況，可於Scival上查詢是否屬企業

Step1:登入Scival，點選左列【房子圖案】，輸入欲查詢企業(以工研院Industrial Technology Research Institute為例)後，點選欲查詢企業

Step2:點選【More details on this Institution】，即顯示出欲查詢企業之類型

*工研院查詢結果為政府機構，故不能勾選企業

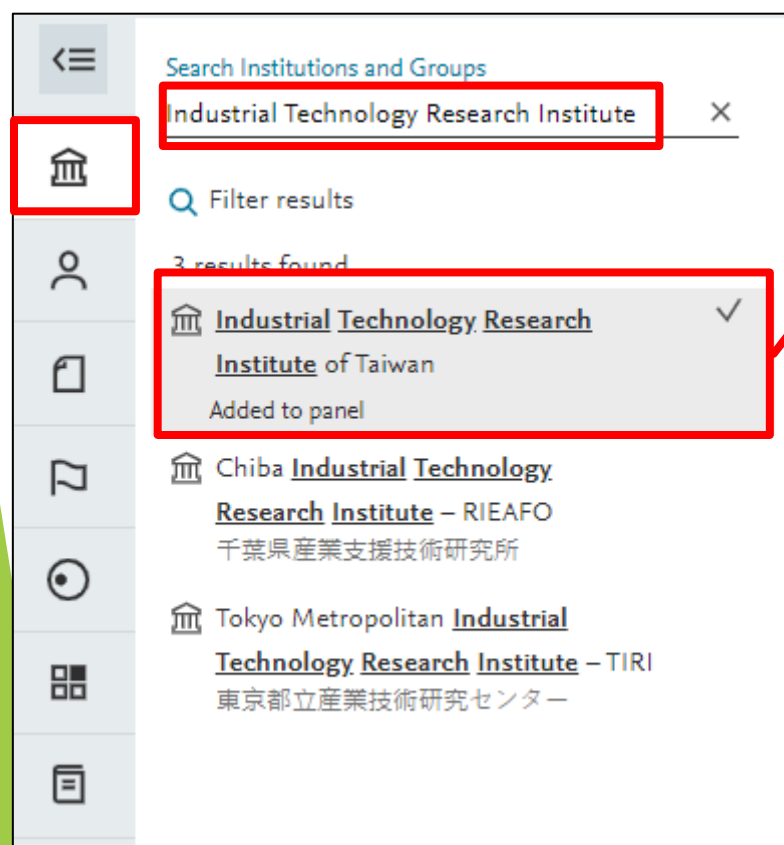

Step1:依ppt第5~6頁方式查詢論文，帶入論文資料畫面後，點選左下方標籤【永續發展目標2023】

Step3:確定有SDG後，即可勾選對應欄位，並請檢附查詢畫面當作佐證資料

☐ 無 (x1)
☐ 企業 (x1.1)
☒ SDG (x1.1)
☐ SSCI (x1.5)
☐ 企業、SDG (x1.2)
☐ 企業、SSCI (x1.6)
☐ SDG、SSCI (x1.6)
☐ 企業、SDG、SSCI (x1.8)

摘要

作者關鍵字

已索引的關鍵字

永續發展目標 2023

裝置商品名

熱門主題

化學品和 CAS 登記編號

四十一

已索引的關鍵字

永續發展目標 2023 ⓘ

對應到本文獻之永續發展目標

永續發展夥伴關係
目標 17

Combined use of microbubbles of various sizes and single-transducer dual-frequency ultrasound for safe and efficient inner ear drug delivery

Liao, Ai-Ho^{a, b}; Wang, Chih-Hung^{c, d}; Wang, Bo-Han^e; Lin, Yi-Chun^d;

Chuang, Ho-Chiao^a; Liu, Hao-Li^b; Shih, Cheng-Ping^c

 將全部儲存到作者清單

^a Graduate Institute of Biomedical Engineering, National Taiwan University of Science and Technology, Taipei, Taiwan

^b Department of Biomedical Engineering, National Defense Medical Center, Taipei, Taiwan

^c Department of Otolaryngology-Head and Neck Surgery, Tri-Service General Hospital, National Defense Medical Center, Taipei, Taiwan

^d Graduate Institute of Medical Sciences, National Defense Medical Center, Taipei, Taiwan

[顯示其他的機構](#) 

2 查看所有計量 >

查閱 PDF 全文選項 匯出

摘要

We have previously applied ultrasound (US) with microbubbles (MBs) to enhance delivery, with most experiments conducted using single-frequency, high-power density multiple treatments. In the present study, the treatment efficacy was enhanced and concerns were addressed using a combination of low-power-density, single-transducer, dual-frequency US ($I_{SPTA} = 213 \text{ mW/cm}^2$) and MBs of different sizes coated with insulin-like growth factor 1 (IGF-1). This study is the first to investigate the drug-coating capacity of human serum albumin (HSA) MBs of different particle sizes and their drug delivery efficiency. The concentration of HSA was adjusted to produce different MB sizes. The drug-coating efficiency was significantly higher for large-sized MBs than for smaller MBs. In vitro Franz diffusion experiments showed that the combination of dual-frequency US and large MB size delivered the most IGF-1 ($24.3 \pm 0.47 \text{ ng/cm}^2$) to the receptor side at the second hour of treatment. In an in vivo

摘要

作者關鍵字

已索引的關鍵字

[illegible]

化學品和 CAS 登記編號

計一冊

查詢W4方式-SDG(方法二)

Step1:登錄至SciVal，輸入老師名字後，點選【View list of publications】

Step2:篩選所欲查詢教師之機構、年份區間與文獻類型後，點選【Apply filter】

(本範例篩選條件為:北科大、2022、Article or Review)

Step3:等Apply filter按鈕反灰後，點選【Export spreadsheet】

以陳生明教授為例:

Publications of Chen, Shenming

Year range: 2013 to 2022 | Applied filters: **Chen, S.-M.** AND (**Article** OR **Review**) AND **2022** [Reset filter](#)

114 publications | [Save as Publication Set](#)

Title	Authors	Year	Scopus Source
Development of Palladium on Bismuth Sulfide Nanorods as a Bifunctional Nanomaterial for Efficient Electrochemical Detection and Photoreduction of Hg(II) Ions	Veerakumar, P., Jaysiva, G., Chen, S.-M. and 1 more	2022	ACS Applied Materials and Interfaces
Tailored construction of one-dimensional TiO ₂ /Au nanofibers: Validation of an analytical assay for detection of diphenylamine in food samples	Kokulnathan, T., Vishnuraj, R., Chen, S.-M. and 5 more	2022	Food Chemistry
UV light assisted photocatalytic degradation of textile waste water by Mg _{0.8} -xZnFe ₂ O ₄ synthesized by combustion method and in-vitro antimicrobial activities	Bessy, T.C., Bindhu, M.R., Johnson, J. and 3 more	2022	Environmental Research
High-performance electrochemical sensing of hazardous pesticide Paraoxon using BiVO ₄ nano dendrites equipped catalytic strips	Gopi, P.K., Ngo, D.B., Chen, S.-M. and 2 more	2022	Chemosphere
Fabrication of thulium metal-organic frameworks based smartphone sensor towards arsenical feed additive drug detection: Applicable in food safety analysis	Chinnapaiyan, S., Rajaji, U., Chen, S.-M. and 3 more	2022	Electrochimica Acta
A robust combination of dysprosium vanadate/halloysite nanotubes: the electrochemical system for dimetridazole detection	Kokulnathan, T., Chen, T.-W., Chen, S.-M. and 4 more	2022	Materials Today Chemistry

Overall research performance

Scholarly Output	Field-Weighted Citation Impact	Citation Count
946	1.66	27,988

Publication share by Subject Area

Authors

- ☒ Chen, S.-M. 114
- ☐ Chen, T. 46
- ☐ Ajmal Ali, M. 15
- ☐ Mariyappan, V. 11
- ☐ Akilarasan, M. 10

Institutions

- ☐ National Taipei University of Technology 114
- ☐ Imperial College London 41
- ☐ King Saud University 28
- ☐ National Taiwan University 13
- ☐ Chang Gung University 11

Publication years

- ☒ 2022 114

Open Access

- ☐ All Open Access 11
- ☐ Gold 6

[Apply filter](#) [Options](#)

[Export spreadsheet](#) [Print](#)

查詢W4方式-SDG(方法二)

Step4:勾選欲匯出之項目再點選【Export CSV】或【Export XLSX】，即可下載檔案

Export publications

Select the fields you want to include in the export for your selected publications. Last selected options are remembered. * in publication year

[Select all](#) | [Deselect all](#) | [Reset to default selection](#)

<input type="checkbox"/> Publication basics	<input type="checkbox"/> Publication details	<input type="checkbox"/> Author/Affiliations	<input type="checkbox"/> Publication metrics	<input type="checkbox"/> Scopus Source related	<input type="checkbox"/> Topic related
<input checked="" type="checkbox"/> Title	<input type="checkbox"/> Reference	<input type="checkbox"/> Scopus Affiliation IDs	<input type="checkbox"/> Views	<input type="checkbox"/> Volume	<input type="checkbox"/> Topic Cluster name
<input checked="" type="checkbox"/> Authors	<input type="checkbox"/> Abstract	<input type="checkbox"/> Scopus Affiliation names	<input type="checkbox"/> Field-Weighted Views Impact	<input type="checkbox"/> Issue	<input type="checkbox"/> Topic Cluster number
<input checked="" type="checkbox"/> Year	<input type="checkbox"/> EID (Scopus ID)	<input type="checkbox"/> Number of Authors	<input type="checkbox"/> Citations	<input type="checkbox"/> Pages	<input type="checkbox"/> Topic name
<input checked="" type="checkbox"/> Full date	<input type="checkbox"/> PubMed ID	<input type="checkbox"/> Scopus Author IDs	<input type="checkbox"/> Field-Weighted Citation Impact	<input type="checkbox"/> Article number	<input type="checkbox"/> Topic number
<input type="checkbox"/> Scopus Source title	<input checked="" type="checkbox"/> Sustainable Development Goals (2023)	<input type="checkbox"/> Scopus Author ID First Author	<input type="checkbox"/> Field-Citation Average	<input type="checkbox"/> ISSN	<input type="checkbox"/> Topic Cluster Prominence Percentile
<input checked="" type="checkbox"/> DOI	<input type="checkbox"/> All Science Journal Classification (ASJC)	<input type="checkbox"/> Scopus Author ID Last Author	<input type="checkbox"/> Outputs in Top Citation Percentiles, per percentile	<input type="checkbox"/> Source ID	<input type="checkbox"/> Topic Prominence Percentile
<input type="checkbox"/> Publication type	<input type="checkbox"/> Code	<input type="checkbox"/> Scopus Author ID Corresponding Author	<input type="checkbox"/> Field-Weighted Outputs in Top Citation Percentiles, per percentile	<input type="checkbox"/> CiteScore*	
<input type="checkbox"/> Open Access	<input type="checkbox"/> Field name	<input type="checkbox"/> Scopus Author ID Single Author	<input type="checkbox"/> Patent citations	<input type="checkbox"/> CiteScore percentile*	
<input type="checkbox"/> Institutions	<input type="checkbox"/> Quacquarelli Symonds (QS)	<input type="checkbox"/> Country/Region		<input type="checkbox"/> SNIP*	
<input type="checkbox"/> Number of Institutions	<input type="checkbox"/> Code			<input type="checkbox"/> SNIP percentile*	
<input type="checkbox"/> Language	<input type="checkbox"/> Field name			<input type="checkbox"/> SJR*	
	<input type="checkbox"/> Times Higher Education (THE)			<input type="checkbox"/> SJR percentile*	
	<input type="checkbox"/> Code				
	<input type="checkbox"/> Field name				
	<input type="checkbox"/> ANZSRC FoR (2020)				
	<input type="checkbox"/> Code				
	<input type="checkbox"/> Field name				

要檢視論文是否為SDG
論文務必勾選此項

Cancel Export CSV Export XLSX

Step5:匯出的表單即會列出被收錄SDG之論文，確定有SDG後，即可勾選對應欄位，並請檢附匯出表單當作佐證資料

額外加權
(W4)

☐ 無 (x1)
☐ 企業 (x1.1)
☐ **SDG (x1.1)**
☐ SSCI (x1.5)
☐ 企業、SDG (x1.2)
☐ 企業、SSCI (x1.6)
☐ SDG、SSCI (x1.6)
☐ 企業、SDG、SSCI (x1.8)

查詢W4方式-SSCI (方法一)

Step1:依ppt第5~6頁方式查詢論文，帶入論文資料畫面後，點選【全文選項】

Step2:顯示出下拉選單後，點選【SCIE】，直接帶出Wos查詢畫面

Step3:確定有SSCI後，即可勾選對應欄位，並請檢附查詢畫面當作佐證資料

[< 返回搜尋結果](#) | 1 / 1

[下載](#) [列印](#) [儲存至 PDF](#) [☆ 加入清單](#) [建立書目](#)

Interactive Learning Environments • 2021

文獻類型
論文
來源出版物種類
期刊
ISSN :
10494820
DOI
10.1080/10494820.2021.1995760
展開

Potential effects of a role-playing digital gaming learning system on the learning performance and motivation in a humanities course

Chin, Kai-Yi^a ; Chen, Yen-Lin^b
將全部儲存到作者清單

^a Department of Data Science, Soochow University, Taipei City, Taiwan
^b Department of Computer Science Information Engineering, National Taichung University, Taichung City, Taiwan

45
瀏覽次數
查看所有計量

[查閱 PDF](#) [全文選項](#) [匯出](#)

摘要

作者關鍵字

永續發展目標 2023

熱門主題

計量

摘要

Using digital learning content to realize learning in games is a rapid interest for teachers and researchers. This study has developed a digital learning system to review Social Studies course content to a fifth Grade class. The system allows students to experience the historical storyline of Tamsui, Taiwan, by playing the role of Dr. Mackay. An experiment was conducted to evaluate the proposed system when applied to the reviewing activity of

以陳彥霖教授之論文為例：

[查閱 PDF](#) [全文選項](#) [匯出](#)

[View at Publisher](#)

[NTUT Full-Text](#)

[Full Text](#)

[SCIE](#)

[SSCI](#)

[Interlibrary Loan](#)

INTERACTIVE LEARNING ENVIRONMENTS

Publisher: ROUTLEDGE JOURNALS, TAYLOR & FRANCIS LTD , 2-4 PARK SQUARE, MILTON KEYNES, MK14 6RN, UK

ISSN / eISSN: 1049-4820 / 1744-5191

Web of Science Core Collection: Social Sciences Citation Index (SSCI)

Additional Web of Science Indexes: Current Contents Social And Behavioral Sciences | Es

額外加權 (W4)

☐ 無 (x1)
☐ 企業 (x1.1)
☐ SDG (x1.1)
☒ SSCI (x1.5)
☐ 企業、SDG (x1.2)
☐ 企業、SSCI (x1.6)
☐ SDG、SSCI (x1.6)
☐ 企業、SDG、SSCI (x1.8)

查詢W4方式-SSCI (方法二)

Step1:依ppt第5~6頁方式查詢論文，帶入論文資料畫面後，點選期刊名稱，視窗右邊即顯示出來源出版物詳情預覽欄位，點選【瀏覽完整的來源出版物詳情】

Step2:點選【SCIE】，直接帶出Wos查詢畫面

Step3:確定有SSCI後，即可勾選對應欄位，並請檢附查詢畫面當作佐證資料

以陳彥霖教授之論文為例：

返回搜尋結果 | 1 / 1

下載 列印 儲存至 PDF 加入清單 建立書目

文獻類型
論文
來源出版物種類
期刊
ISSN :
10494820
DOI
10.1080/10494820.2021.1995760
展開

Interactive Learning Environments 2021

Potential effects of a role playing learning system on the learning and motivation in a human

Chin, Kai-Yi^a ; Chen, Yen-Lin^b
將全部儲存到作者清單

^a Department of Data Science, Soochow University, Taipei City,
^b Department of Computer Science Information Engineering, Taipei City, Taiwan

45
瀏覽次數

查看所有計量

查閱 PDF 全文選項 匯出

來源出版物詳情預覽

Interactive Learning Environments

出版: Taylor & Francis
來源出版物種類: 期刊

瀏覽完整的來源出版物詳情

計量

CiteScore 2022 11.0
SJR 2022 1.170

CiteScore 排名

ASJC 類別

四分位數

百分位數

Education Q1 98th 24 / 1469

Computer Science Applications Q1 92nd 57 / 792

來源出版物詳情

Interactive Learning Environments

Scopus 涵蓋年度: 1990, 從 1992 到 1994, 從 2004 至今
圖書館訂閱: 從 January 1998 到 December 2005
發表者: Taylor & Francis
國際標準期刊號: 1049-4820
學科類別: Social Sciences: Education Computer Science: Computer Science Applications
來源出版物種類 期刊

查閱所有文獻 設定文獻通知 儲存到來源出版物清單 Source Homepage NTUT Full-Text Journal Finder 更多

CiteScore CiteScore 趨勢 Scopus 內容涵蓋範圍

Library Catalogue
SCIE

INTERACTIVE LEARNING ENVIRONMENTS

Publisher: ROUTLEDGE JOURNALS, TAYLOR & FRANCIS LTD, 2-4 PARK SQUARE, MILTON PARK, ABINGDON, ENGLAND, OXON, OX14 4RN

ISSN / eISSN: 1049-4820 / 1744-5191

Web of Science Core Collection: Social Sciences Citation Index (SSCI)

Additional Web of Science Indexes: Current Contents Social And Behavioral Sciences | Essential Science Indicators

續下頁

查詢W4方式-SSCI (方法三)

Step1:依ppt第5~6頁方式查詢論文，帶入論文資料畫面後，複製期刊名稱

Step2:至Wos將期刊名稱貼上後，點選【搜尋】，直接帶出查詢畫面

Step3:確定有SSCI後，即可勾選對應欄位，並請檢附查詢畫面當作佐證資料

以陳彥霖教授之論文為例：

The screenshot shows the WoS journal search interface. A red box highlights the journal name 'Interactive Learning Environments' in the search bar. Another red box highlights the journal name 'INTERACTIVE LEARNING ENVIRONMENTS' in the search results. A red arrow points from the search bar to the search results. A third red box highlights the category 'EDUCATION & EDUCATIONAL RESEARCH - SSCI (SSCI)' in the journal information section.

文獻類型
論文
來源出版物種類
期刊
ISSN :
10494820
DOI
10.1080/10494820.2021.1995760
展開

Chin, Kai-Yi^a ; Chen, Yen-Lin^b
將全部儲存到作者清單

^a Department of Data Science, Soochow University, Taipei City, Taiwan
^b Department of Computer Science Information Engineering, National Taipei City, Taiwan

45
瀏覽次數

查看所有計量

查閱 PDF 全文選項 匯出

The world's leading journals and publisher-neutral data

Interactive Learning Environments

JOURNAL NAME
INTERACTIVE LEARNING ENVIRONMENTS
See 1 result

ISSN/eISSN
1049-4820 / 1744-5191

INTERACTIVE LEARNING ENVIRONMENTS

ISSN
1049-4820
EISSN
1744-5191
JCR ABBREVIATION
INTERACT LEARN ENVIR
ISO ABBREVIATION
Interact. Learn. Environ.

Journal information

EDUCATION & EDUCATIONAL RESEARCH - SSCI (SSCI)

LANGUAGES
English
REGION
ENGLAND
1ST ELECTRONIC JCR YEAR
2005

Publisher information

PUBLISHER
ROUTLEDGE JOURNALS, TAYLOR & FRANCIS LTD
ADDRESS
2-4 PARK SQUARE, MILTON PARK, ABINGDON OX14 4RN, OXON, ENGLAND
PUBLICATION FREQUENCY
8 issues/year

查詢W4方式

注意事項:

1. 企業的定義:crop、Ltd、醫院，或Scival上認列之企業。
2. 需檢附論文第一頁為佐證資料，勾選SDG或SSCI者，請檢附查詢畫面為佐證資料。

(四) 額外加權(W4)：若該篇文章與下列合著之加權相對應權重如下所示，有多項加權者請選擇相對應之選項。

額外加權	無	企業	SDG	SSCI
權重4(W4)	1	1.1	1.1	1.5

註一：符合多項加權時，請依表格填寫。

額外加權 (W4)

- ☐ 無 (x1)
- ☐ 企業 (x1.1)
- ☐ SDG (x1.1)
- ☐ SSCI (x1.5)
- ☐ 企業、SDG (x1.2)
- ☐ 企業、SSCI (x1.6)
- ☐ SDG、SSCI (x1.6)
- ☐ 企業、SDG、SSCI (x1.8)

查詢W5方式

依ppt第15~16頁方式下載論文檔案，作者下方之區域，可以看到國際學者以陳生明教授之論文為例：

本篇文章與3位國際學者合著，對應法規應x1.2

Disposable cerium oxide/graphene nanosheets based sensor for monitoring acebutolol in environmental samples and bio-fluids

Subash Vetri Selvi^{a,1}, Nandini Nataraj^{a,1}, Tse-Wei Chen^{a,b,c}, Shen-Ming Chen^{a,*},
Prakash Balu^e, Xiaoheng Liu^{d,*}

^a Electroanalysis and Bioelectrochemistry Lab, Department of Chemical Engineering and Biotechnology, National Taipei University of Technology, No. 1, Section 3, Chung-Hsiao East Road, Taipei 106, Taiwan, ROC

^b Research and Development Center for Smart Textile Technology, National Taipei University of Technology, No.1, Section 3, Chung-Hsiao East Road, Taipei 106, Taiwan

^c Department of Materials, Imperial College London, London SW7 2AZ, United Kingdom

^d Key Laboratory of Education Ministry for Soft Chemistry and Functional Materials, Nanjing University of Science and Technology, Nanjing 210094, China

^e Department of Biotechnology, School of Life Science, Vels Institute of Science, Technology and Advanced Studies, Chennai, Tamilnadu, India

國際合著學術
機構國家數
(W5)

- ☐ 無 (x1)
- ☐ 1-2個國家 (x1.1)
- ☒ 3個國家以上 (x1.2)

注意事項：

國際學者的定義：除台灣以外皆是外國，且單位須為學術機構(學校、研究機構)。

查詢W5方式-國際學者

國際學者通常為 **University**、**Academic**、**College**、**Laboratory**，若非前述情況，可於 Scival 上查詢是否屬研究機構，查詢方式同前

*私人公司之研究室不屬於研究機構

The screenshot illustrates the Scival interface for querying institutions. On the left sidebar, the 'Institutions and Groups' icon is highlighted with a red box. The main panel displays the profile for 'National Taipei University of Technology'. A red box highlights the 'More details on this Institution' link, with a red arrow pointing to a detailed view of the institution. In this detailed view, the 'Institution type: Academic' field is highlighted with a red box.

Institutions and Groups

Search

★ Favorites

National Taipei University of Technology

Others

Industrial Technology Research Institute of Taiwan

National Taipei University of Technology ★

國立臺北科技大學

Taiwan **More details on this Institution**

2018 to 2022 All subject areas

ASJC

Summary Topics Ranking Collaboration Published Viewed **Cited** Authors Patent Impact

Citation Count ⓘ

National Taipei University of Technology

國立臺北科技大學

Taiwan **Institution type: Academic** Download full list of authors

About Compare definitions Groups

Institution definition

Include affiliations with relation:

☐ Unknown

Create Research Area with listed affiliations

SCOPUS文獻資料庫操作



Scopus / SciVal簡介

- 論文發表資料庫 / 資料分析 (盡量以此進行資料蒐集與分析)
- QS、THE以此資料計算世界各大學排名
- 重點關注論文被引用率、FWCI、H5-index
- SDGs也是影響世界大學排名的重要指標(共採16項)
- 論文主要採計期刊(article)，較少採用研討會文章(conference...)
- 兩者因功能性差異，查詢的結果會有些許差距



FWCI值

FWCI數字會不定時改變，以1為全球平均值。
(Like大麥克指數的概念)

一、 FWCI 定義及說明：

領域權重引用影響力指數 (Field- Weighted Citation Impact, FWCI)

Field Weighted Citation Impact (FWCI)

依相同學科領域、相同出版年份與相同文獻類型做比較，得出的標準化平均引用次數。

$$\text{文獻P(1)的FWCI} = \frac{\text{文獻P(1)的被引用次數}}{\text{文獻P(1)在全球同發表年、同學科、同文獻類型文獻集合的平均被引用次數}}$$

$$\text{機構FWCI (文獻集合 P(1)-P(N)FWCI)} = P(1), P(2), P(3) \dots P(N) \text{ 的所有FWCI的平均}$$


二、 FWCI 搜尋方式：

Step1: 登入 [Scopus 資料庫](#) (亦可透過圖書館電子資源查詢系統登入；Scopus 和 [SciVal](#) 是同一個帳號)



Step3: 查詢到自己資料頁面後，點選 Export to [SciVal](#)



在 SciVal 頁面，左邊  可以看到自己的名字，右邊可以看到自己的論文發表資料及 FWCI 值



H5 index

從排序的結果可看出被引用的文章「從今年往前推算的五年內，有n篇文章至少被引用n次」。
與文章的發表數通常成正比。

SciVal

Overview Benchmarking Collaboration Trends Reporting My SciVal Scopus

Hide tags

Researchers and Groups

Chen, Shenming

National Taipei University of Technology ... Show all affiliations | View in Scopus | Is this you?

2016 to 2021 All subject areas ASJC

務必要使用正確的比較區間

Summary Topics Collaboration Published Viewed Cited Economic Impact

Overall research performance

560 Scholarly Output ①

28.7% All Open Access

View list of publications

17.9 Citations per Publication ①

Publications by Subject Area

Donut Chart

同區間的FWCI值

1.77 Field-Weighted Citation Impact ①

Yearly breakdown

10,048 Citation Count ①

36 h5-index ①

學校通常以H5做比較



FWCI值查詢方法-以本校數值為例

SciVal

Overview Benchmarking Collaboration Trends Reporting My SciVal Scopus

1 entity selected

Deselect all

2018 to 2022

All subject areas

ASJC

Data sources

Institutions and Groups

確認搜尋學校/人名是否正確

National Taipei University of Technology

Others

Chang Gung University

Industrial Technology Research Institute Hsinchu

National Central University

National Sun Yat-sen University

National Taiwan Normal University

National Taiwan University of Science and Technology

Taipei Medical University

Tunghai University

All Metrics Rankings Metrics

Table Chart

Metric guidance + Add to Reporting Export

Benchmark one metric over time Benchmark multiple metrics

Metric: Scholarly Output

Entity

	2018	2019	2020	2021	2022	Overall
National Taipei University of Technology	1,203	1,458	1,589	6,888		

用預設值搜尋即可

Field-Weighted Citation Impact

skew the FWCI. Learn more about this metric

Include self-citations

Include:

All publication types

Articles only

Articles and conference papers

Articles and reviews

Collaboration

Published

View

Cited

Citation Count

Field-Weighted Citation Impact

Outputs in Top Citation Percentiles

Publications in Journal Quartiles

Publications in Top Journal Percentiles

Citations per Publication

Options

+ Add new

FWCI值查詢方法-以本校數值為例

SciVal

Overview Benchmarking Collaboration Trends Reporting My SciVal Scopus

1 entity selected [Deselect all](#)

Institutions and Groups

Search

★ Favorites [Deselect all](#)

☒ ☐ National Taipei University of Technology

Others [Select all](#)

☐ Chang Gung University

☐ Industrial Technology Research Institute Hsinchu

☐ National Central University

☐ National Sun Yat-sen University

☐ National Taiwan Normal University

☐ National Taiwan University of Science and Technology

☐ Taipei Medical University

☐ Tunghai University

2018 to 2022 ☐ All subject areas ☐ ASJC ☐ Data sources

Benchmarking

All Metrics Rankings Metrics

Table Chart

Benchmark multiple metrics [Reset to one metric over time](#)

Metric guidance + Add to Reporting Export

Entity ↑

	Scholarly Output	Field-Weighted Citation Impact
<input checked="" type="checkbox"/> National Taipei University of Technology	6,888	1.02

View list of Scopus Sources for the selected Researchers and Groups

Metrics details

Metric 1: **Scholarly Output** [Settings](#)
Types of publications included: all.


Metric 2: **Field-Weighted Citation Impact** [Settings](#)
Types of publications included: all. Self-citations included: yes.

此值即為篩選年份之FWCI值

備註：H5 index值亦適用同樣查詢步驟



FWCI值查詢方法-以本校莊研發長為例

 SciVal

Overview **Benchmarking** Collaboration Trends Reporting My SciVal Scopus 12

2 entities selected
Deselect all

Benchmarking 更改年份區間

2018 to 2022 All subject areas ASJC Data sources

點選個人，搜尋姓名

Search

Select all

1

☐ Chang, Jenchia
☐ Chang, Kuo Jen
☐ Chang, Shihhsien
☐ Chang, Shu-Mei
☐ Chang, Shuennyih
☐ Chang, Shumei
☐ Chang, Wei Lun
☐ Chang, Wenchung
☐ Chang, Yanglang
☐ Chang, Yanglang
☐ Chang, Yuhstu
☐ Chao, Chuangmin
☐ Chen, Chihkeng
☐ Chen, Chihyuan
☐ Chen, Hsiuhui

All Metrics Rankings Metrics

Table Chart

Metric guidance + Add to Reporting Export

Benchmark one metric over time Benchmark multiple metrics Heatmap

Metric: Scholarly Output

Entity	2018	2019	2020	2021	2022	Overall
Chuang, Hochiao	8	9	10	9	11	47
National Taipei University of Technology	1,203	1,261	1,377	1,459	1,587	6,887

View list of Scopus Sources for the selected Researchers and Groups

4

+1

備註：個人之H5 index值亦適用同樣查詢步驟

FWCI值查詢方法-以本校莊研發長為例

2 entities selected [Deselect all](#)

Researchers and Groups

Search

Select all

- ☐ Chang, Jenchia
- ☐ Chang, Kuo Jen
- ☐ Chang, Shihhsien
- ☐ Chang, Shu-Mei
- ☐ Chang, Shuenniyih
- ☐ Chang, Shumei
- ☐ Chang, Wei Lun
- ☐ Chang, Wenchung
- ☐ Chang, Yanglang
- ☐ Chang, Yanglang
- ☐ Chang, Yuhstu
- ☐ Chao, Chuangmin
- ☐ Chen, Chihkeng
- ☐ Chen, Chihyuan
- ☐ Chen, Hsiuhui
- ☐ Chen, Jiannjong
- ☐ Chen, Lungchien

+ Add new

Options ...

All Metrics Rankings Metrics

Table Chart

Metric guidance + Add to Reporting Export

Benchmark one metric over time Benchmark multiple metrics

Heatmap

Metric: Scholarly Output

Entity	2018	2019	2020	2021	2022	Overall
Chuang, Hochiao	8	9	10			
National Taipei University of Technology	1,203					

Scholarly Output

FWCI與H5值皆選Cited

FWCI不需更改選項直接點選 Choose metric即可

Include:

- ☒ All publication types
- ☐ Articles only
- ☐ Articles and conference papers
- ☐ Articles and reviews
- ☐ Articles, reviews and conference papers

Choose metric

h-indices

h5-index

Choose metric

H5值請往下拉點選h5-index選項

h-indices

of citations they have received. h5-index is h-index for the past 5 years. g-index emphasizes the most highly cited publications. m-index is h-index per year. Learn more about this metric

Select metric:

- ☐ h-index
- ☒ h5-index
- ☐ g-index
- ☐ m-index

☐ Include self-citations

Choose metric

Citation Count

Field-Weighted Citation Impact

Outputs in Top Citation Percentiles

Publications in Journal Quartiles

Publications in Top Journal Percentiles

Citations per Publication

Cited Publications


Number of Citing Countries

Collaboration Impact

Academic-Corporate Collaboration

FWCI值查詢方法-以本校莊研發長為例

Benchmarking

2018 to 2022 All subject areas ASJC ☐  [Data sources](#)


All Metrics Rankings Metrics

Table

Chart

[Metric guidance](#) [+ Add to Reporting](#) [Export v](#)

Benchmark multiple metrics | [Reset to one metric over time](#) ☐ Heatmap

Entity 



Scholarly Output

Field-Weighted Citation Impact (excl. self-citations)

h5-index

+ ≡

+ 1

 Chuang, Hochiao	47	0.54	6
 National Taipei University of Technology	6,887	0.83	64

獲得兩項結果後列印此頁面即可